

PREMA

TIRE AND WHEEL SERVICE SOLUTIONS

Tread Ahead

with exceptional
products and service

NEW PRODUCTS

Page 1)

The latest technology
and supplies

Photo courtesy of

Continental 

FALL 2025

PREMA CANADA.CA



1-800-268-6311

AUTEL MAXIPMS MX-sensor 1 SENSOR



FAST INSTALLATION
PRESS RELEASE
INTERCHANGEABLE
VALVE STEMS



THE BEST SELLING
AFTERMARKET  SENSOR
IN NORTH AMERICA

99% VEHICLE
COVERAGE
ORIGINAL EQUIPMENT FIT FORM & FUNCTION



PROGRAMMABLE
UNIVERSAL TPMS



MAX SIGNAL
STRENGTH

BLUETOOTH LOW
ENERGY TPMS SENSOR

- PRE-PROGRAMMED
- TESLA-READY
- PROGRAMMABLE FOR BLE-EQUIPPED VEHICLES



MAXIPMS ITS600

HANDHELD TPMS SERVICE & DIAGNOSTIC TABLET

- Wireless Touchscreen/Android 9.0
- Activates, Reads and Relearns All Known Sensors
- Program AUTEL MX-Sensors to replace 99% of TPMS sensors on the vehicles on the road today
- On-Tool DOT Tire Registration with CIMS Account
- Enhanced, At-a-Glance Diagnostics Status Screen + TPMS Health Report
- Read/Erases All System Codes and Perform OLS, BMS, SAS & EPB
- Compatible with Autel's new Tesla-ready & programmable Bluetooth Low Energy TPMS Sensors



SET UP AUTOAUTH ON YOUR ITS600
WATCH NOW

MAXIPMS TS900

3-IN-1 TPMS, ADVANCED DIAGNOSTICS, & SERVICE TABLET



Includes all features & functions of the ITS600 plus...

- Android 11 OS
- Perform Bi-directional Active Tests & Special Functions
- Extensive Service Menu with direct access to over 40 maintenance tasks
- Generate Detailed Pre- & Post-Scan Reports
- Wi-Fi sharing and printing

AUTEL®

1.855.288.3587 | AUTEL.COM | FOLLOW US @AUTELTOOLS

NEW PRODUCTS

PREMA

TIRE AND WHEEL SERVICE SOLUTIONS



DETAILING PRODUCTS



MTY-DL6135

The Mighty Headlight Restoration Kit rejuvenates unsightly yellowed or faded headlights • Improve appearance, as well as dramatically increasing light output, visibility and driving safety at night, with this long-lasting treatment.



MTY-DL6014

Mighty VS7® Detail Spray Ceramic Fortified
• Delivers exceptional gloss and slickness to the treated surfaces, along with unparalleled surface protection • This product can be used on all exterior surfaces, including glass, plastic trim, chrome, moldings, and wheels • 16 oz



MTY-DL6144

Two-sided Microfiber Towel • One of the thickest in the industry • Approx 16" x 24"

MTY-DL6143

Bulk Microfiber Towel x1 • Assorted colours • Approx 16" x 16"



MTY-DL7001

Mighty VS7® Carpet Spotter is a powerful spot remover specifically formulated to remove tough spots and stains from carpets instantly, without rubbing or scrubbing • 12 oz



MTY-DL7002

Mighty VS7® Interior Detailer is a fast-drying dressing formulated to shine vinyl and plastic surfaces. Designed to lay flat with no wiping necessary • 12 oz



MTY-DL7003

Mighty VS7® Foaming Upholstery Cleaner is specially formulated to gently foam away soil, dirt and stains from velour, cloth, carpet, and other similar surfaces • 19 oz



MTY-DL3104

Mighty VS7® Wheel Protectant provides ceramic fortified surface protection for both OEM and aftermarket wheels • The treated surface will resist road dirt, grime and brake dust, making future cleanings easier • 32 oz



MTY-DL3301

Mighty VS7® Sap Remover is a fully active tree sap remover, without useless filters • Any excess product will quickly evaporate from the surface and will not damage surrounding trim or rubber seals • 32 oz



MTY-DL6100

Tire Foam Applicator Pad x1 • Poly sponge for applying wax, polish or tire dressing

TIRE AND WHEEL CLEANERS



MTY-DL3100-1

Mighty VS7® Non-Acid Tire & Wheel Cleaner is a revolutionary formula allowing a thick, gel-like cleaner to cling to the surface, aggressively removing even the toughest brake dust, dirt & grime • 1 gal



MTY-DL3101-1

Mighty VS7® Presto Whitewall Tire Cleaner is a water-based formula that removes factory coating including tire blue, curb burns, dirt, and stains. Dilute up to 1:6 • 1 gal



MTY-DL3102-1

Mighty VS7® Wheel Acid Tire & Wheel Cleaner is a powerful acid-based formula • Use on wire wheels, chrome, and alloys • Wheel Acid is a professional strength wheel cleaner and brightener • Instantly removes road film, oxidized metals, and brake cleaner • 1 gal



SCAN QR CODE TO VIEW FULL SECTION

premacanada.ca | 1-800-268-6311 | sales@premacanada.ca | 1

Ken-Tool®
WHEREVER TIRES ARE CHANGED™

JACK ROD



2-ton
21009



3.5-ton
21007



3.5-ton
21008



• Floor Jack Supports • Fast and Easy Installation • Creates a safe working environment

TIRE SPREADERS



MARTINS



MTRS

Air Operated Passenger/Light Truck Tire Spreader • The ultimate assistant when it comes to tire inspection and repair of passenger and light truck tire • Features adjustable spreader hooks, built-in storage compartment, large tool tray, tire rollers and a durable inspection light • Easily operates with 2 pedals (spread/release) • Built with a sturdy square base



MTRS-HD

Air Operated Truck Tire Spreader • Ultimate assistant when it comes to tire inspection and repair of truck, bus and commercial/public utility tires • Features a heavy-duty, automatic tire lifting platform and spreader hooks with tire rollers and roll-on ramp with a durable inspection light • Easily operates with 2 joysticks. Built with a sturdy wide base

TIRE INFLATOR



89XTC

Temperature Compensating Tire Inflator
• Designed to work with an in-line temperature sensor and is engineered specially for inflating large industrial and mining tires which are often constantly in service and always running hot



Specifically designed for OTR industrial mining and continuous operation applications:

- 1/2" inlet/outlet
- Weather-proof hardware to withstand high impact, heavy use
- Wet and dry tire pressure compensation for normal and liquid filled tires
- Easily adjustable base/ambient temperature setting to optimize for any environment
- Wireless temperature transmitter
- Operating range: 5-145 PSI

Features and Benefits:

- Custom faceplates with corporate logo and colour available.
- Can be hard-wired and mounted to mobile service trucks.
- Accurate to +/- 0.3 PSI





CAMBER/CASTER SLEEVES

Code	Description
23182	1/2° Camber/Caster Sleeve
23183	3/4° Camber/Caster Sleeve
23184	1° Camber/Caster Sleeve
23185	1-1/4° Camber/Caster Sleeve
23186	1-1/2° Camber/Caster Sleeve
23187	1-3/4° Camber/Caster Sleeve
23188	2° Camber/Caster Sleeve
23189	2-1/4° Camber/Caster Sleeve
23190	2-1/2° Camber/Caster Sleeve
23222	1/2° Ford Sleeve
23223	3/4° Ford Sleeve
23224	1° Ford Sleeve
23225	1-1/4° Ford Sleeve
23226	1-1/2° Ford Sleeve
23227	1-3/4° Ford Sleeve
23228	2° Ford Sleeve
23268	2.3° Ford Super Duty Sleeve
23269	2.6° Ford Super Duty Sleeve



**Specialty
Products
Company®**

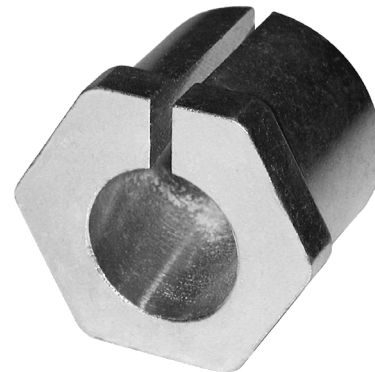

These popular sleeves are widely used to adjust camber / caster on many vehicles.

23180 Series

Used to adjust camber / caster on many Ford and Mazda RWD & FWD trucks.

23220 Series


Used to correct camber / caster on F250 and F350 Super Duty trucks.

23268 / 23269

These sleeves have a fixed positive camber and caster change and are made to align trucks that have been lifted or to provide more caster change than the 23220 series.

CAMBER BOLTS

Code	Description
81240	EZ Cam XR • 10 mm • Pair
81250	EZ Cam XR • 12 mm • Pair
81260	EZ Cam XR • 14 mm • Pair
81270	EZ Cam XR • 15 mm • Pair
81280	EZ Cam XR • 16 mm • Pair
81290	EZ Cam XR • 17 mm • Pair
81295	EZ Cam XR • 18 mm • Pair
84120	Hyundai/KIA Sedona Rear Camber Bolt Kit
66038	Chrysler LX Cams • Pair
87500	Ford Explorer Camber/Caster Adjusting Kit • 4-Pack
87520	Nissan Camber/Caster Adjusting Kit • Pair

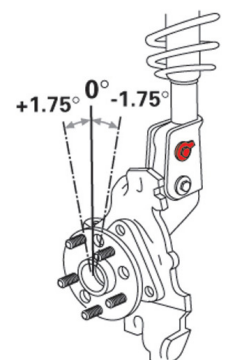

EZ Cams make non-adjustable two bolt struts adjustable up to $\pm 1.75^\circ$ degree camber change. Head markings show where the cam is for maximum change, and an easy-to-manipulate toothed washer lets you set positive or negative change.



BRAKE & PARTS CLEANER 2.0 - ACETONE FREE



EMZ45215 EXOTIC BRAKE & PARTS CLEANER – 10% VOC

10% VOC Exotic Brake Cleaner • Acetone free • 390 g aerosol can • Quickly dissolves and removes grease, oil, brake fluid, road grime and dirt from brake parts, CV joints, disc pads, drums, and other components • Deep cleaning and fast drying



EMZ45274 EXOTIC BRAKE & PARTS CLEANER – 10% VOC 18.9L PAIL W/ PULL-UP SPOUT

10% VOC Exotic Brake Cleaner • Acetone free • 18.9 L Pail with Vinyl Pull Out Spout for pouring • Quickly dissolves and removes grease, oil, brake fluid, road grime and dirt from brake parts, CV joints, disc pads, drums, and other components • Deep cleaning and fast drying

EMZ45273 EXOTIC BRAKE & PARTS CLEANER – 10% VOC 18.9L PAIL - THREADED FOR SPIGOT

Spigot sold separately.



AUTEL

DIAGNOSTIC TOOLS



MSULTRA EV

Autel MaxiSYS MSUltra EV • Advanced EV Diagnostics with MaxiFlash VCMII • Advanced diagnostics for electric, hybrid, gas, and diesel vehicles • Provides a comprehensive analysis of electric and hybrid vehicles with expanded topology mapping and battery pack analysis that can be performed via OBD or directly with included specialty cables and jumpers • Displays detailed graphics and in-depth connection guidance to provide safe and secure testing • The 12.7" touchscreen tablet comes equipped with the MaxiFlash VCMII (5-in-1) measurement device, Bluetooth-enabled vehicle communication interface and J2534 pass-thru programming device, and a dedicated EVDiag box



IM608PROIIKPA

Autel Top Diagnostic Scanner and Key Fob Programming Tool • The IM608PROIIKPA is a Comprehensive Key and Immobilizer Programming Package, including the MaxiIM IM608PROII 10.1" Android Touchscreen Tablet, XP400Pro Key and Chip Programmer, the Wireless JVCII J2534 Pass Thru Programming Device and the Key Programming Adapter Kit • Enables key learning directly through the OBDII port for 85 percent of vehicles in North America • The IM608PROII is also an advanced diagnostics tablet featuring AutoVIN and AutoSCAN technology to automatically identify the vehicle and perform an all systems scan

ZAFETY LUG LOCK®



Zafety Lug Lock® is a wheel retainer, not just a wheel nut indicator. This simple design reduces the risk of wheel loss by securing adjacent wheel nuts together and minimizing their ability to rotate. Wheel nuts can be torque checked without removing the Zafety Lug Lock®.

Code	# of Studs	Spacing	Nut Size
ZTY-ZCHOB-33	10 Studs	3-1/2"	33 mm
ZTY-ZTHOB-32	10 Studs	4-1/8"	32 mm
ZTY-ZTHOB-33	10 Studs	4-1/8"	33 mm
ZTY-ZVHOB-22	6 & 8 Studs	2-1/2"	22.2 mm

Other sizes available



REPLACEMENT TPMS SENSORS

33500S EZ-SENSOR



Dual Band Programmable TPMS EZ-Sensor with Snap-In Valve • Combines 314.9, 315 and 433 MHz applications into a single SKU

PREM-ONE PREMA U-PRO



U-Pro Dual Frequency TPMS Sensor • 315 / 433 MHz • Interchangeable valve with the PREM-207 or 20018

PREM-NFC PREMA U-PRO NFC



U-Pro Dual Band NFC TPMS Sensor • Smart Phone Programmable • 315 / 433 MHz • Interchangeable valve with the PREM-207 or 20018

AUT-1-SENSOR AUTEL MX-SENSOR



Programmable Universal TPMS Sensor • Combines 315 MHz and 433 MHz frequencies into one TPMS sensor • Interchangeable Stem

17-43041 SMART SENSOR ONE



Smart Sensor One Multi-frequency Programmable Universal TPMS Sensor • Rubber Stem • Covers both 315 MHz and 433 MHz • Interchangeable Stem

591134 ALLIGATOR SENS.IT RS+



Dual Frequency TPMS Sensor with Rubber Snap-In Valve • 99.7% coverage and 100% OE mimic functionality • Frequency Range: 315 MHz & 433 MHz

PREM-TESLA U-PRO HYBRID BLE



U-Pro Hybrid BLE Tesla Replacement TPMS Sensor with Black Clamp-In Valve • Pre-programmed for Tesla Model 3, S, X & Y

REPLACEMENT RUBBER VALVES



PREM-207



PREM-215A



AUT-MXSENSRVK

Code	Description	Valve Base
PREM-207	Replacement Snap-In Valve for Schrader GM, Ford and Programmable Sensors	
PREM-208	Replacement Clip Design Snap-In Valve for the 5775 Dodge Dart Sensor and Redi-Sensor	
PREM-210	Replacement Snap-In Valve for certain Schrader sensors on Ford, GM, and Subaru Vehicles between 2015-2024	
PREM-211	Replacement Snap-In Valve for Dodge Ram Models • Base has 4 square sides	
PREM-215A	Replacement Snap-In Valve for Smart Sensor	
20018	TPMS Snap-in Service Kit (Ford/GM) • Interchangeable with EZ-Sensor or U-Pro	
A-20008	TPMS Snap-in Service Kit (Ford/GM) • Interchangeable With EZ-Sensor or U-Pro	
AUT-MXSENSRVK	MX-SENSOR-only Rubber Valve Kit • Rubber Interchangeable Press-In Valve Stems • Exclusive Press Release Interchangeable Valve Stems • 4 Pack	
VS-65	Replacement Stem for 2014 Dodge Ram • Fits Schrader Sensor 28984 or Dill Sensor 6815 • Square Brass Stem • All 4 sides at Base	



SCAN QR CODE TO VIEW FULL SECTION

TPMS SCAN TOOLS



PREM-H47

Prema H47 with Integrated OBDII Module • Free Lifetime Updates • Programs U-Pro Sensors • Activates or reads all other TPMS Sensors




AUT-TS508WF

Autel MaxiTPMS TS508WF with Wi-Fi updates • Features Quick and Advance modes of TPMS service and a TPMS status screen • Can read/activate/relearn all known sensors, has 4 methods of MX-Sensor programming, and performs placard value resets on supported vehicles • Displays on-tool MX-Sensor relearn procedures including OBDII and can do key fob signal tests



WRT600PRO

Bartec Tech600PRO TPMS tool with VCI and 30 RITE-SENSORS • Wireless capabilities • 2.8" High Resolution Colour Display • 2.4 GHz WiFi • Qi Charging



AUT-ITS600

Autel ITS600 • Wireless, touchscreen Android-based tablet • Complete TPMS diagnostics and service functions • 5.5" colour display and Bluetooth VCI • VINscan for rapid vehicle identification, four MX-Sensor programming options, OBDII relearn functionality and onscreen relearn instructions for all vehicles • Can activate, read and relearn all known sensors, perform TPMS system diagnostics and four common maintenance services • Provides DOT number scan, tire expiration notice, and access to recall lookup



AVT41

Alligator TPMS Wireless Programming and Diagnostic Tool makes programming Sens.it RS+ TPMS Sensors easy • Supports your workflow with wireless activation, cloning, programming and ECU resets



AUT-TS900

3-in-1 TPMS, Advanced Diagnostics, & Service Tablet • Includes all features & functions of the ITS600 • Android 11 OS • Perform Bidirectional Active Tests & Special Functions • Extensive Service Menu with direct access to over 40 maintenance tasks • Generate Detailed Pre- & Post-Scan Reports • Wi-Fi sharing and printing

TPMS MECHANICAL TOOLS



17-173

TPMS Torque Valve Core Tool • Maintenance-free precision ratchet mechanism • Safely tightens valve cores to specifications mandated for most TPMS sensor valves



5415

TPMS Snap-In T-10 Torque Driver • Pre-set to 12 in-lbs • Replaceable bit



17-168

TPMS Mechanical Tool Bundle • Complete with Torque Wrench, Core Tool, Grommet Tool, and many more

TPMS SERVICE KITS



PREM-CORE

Nickel Valve Cores • 100 per box



17-492L-1

Long Black Plastic TPMS Caps with seal • 100 per box



7100

Dill TPMS Service Kit Assortment • Includes these 76 service kits (see website)





TESLA BLE SENSOR




Hamaton U-Pro Hybrid BLE

- Cost-effective Aftermarket Bluetooth Low Energy TPMS Sensors for Teslas
- Direct replacement of OE sensor
- Pre-programmed for Tesla model 3, S, X and Y
- No programming required - install and drive
- Valve colour complements the alloy wheel


Coverage:

- Tesla Model 3 (Oct 2020+)
- Tesla Model S (Jun 2021+)
- Tesla Model X (Oct 2021+)
- Tesla Model Y (Oct 2020+)



Order Number: **PREM-TESLA**

YOUR PREMA BRANDED SENSOR SOLUTION

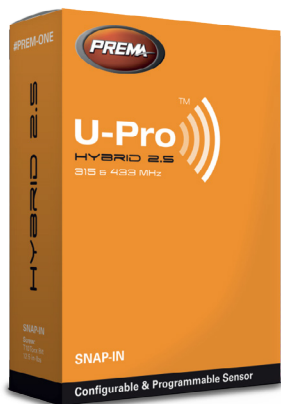

PREMA U-Pro Hybrid 2.5

- 99% of direct TPMS-enabled vehicle coverage
- Configurable: configure in 1-3 seconds, as protocols covering a high percentage of vehicles are stored on the sensor
- Programmable: New programmable protocols added as they become available, future-proofing stock
- Dual Frequency 315 & 433MHz
- Compatible with 25 + ATEQ manufactured TPMS tools
- Fastest configurable/programmable sensor in the market
- Program sensors through the tire with a tool while fully inflated – saving time
- 115 PSI Valve Rated
- 3-Year Sensor Warranty

Order Number: **PREM-ONE**

THE 1ST PROGRAM-BY-PHONE SENSOR



PREMA U-Pro Hybrid NFC

Built-in NFC (Near-Field Communication) technology:

- Facilitates rapid programming
- Eliminates interference with other sensors
- Any brand tool can perform relearn once programmed

Download the Free App




It also includes the same great features as the U-Pro Hybrid 2.5

Order Number: **PREM-NFC**

TUBELESS SNAP-IN TYPE VALVES - .453 and .625 Rim Holes

For use up to 65 PSI Cold Inflation Pressure maximum

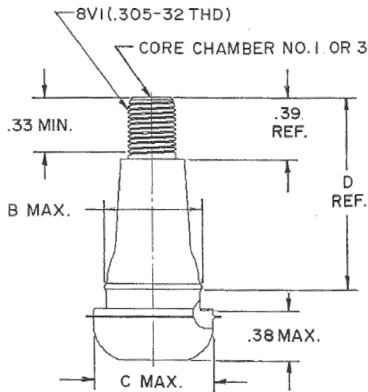

NOTES:

1. Recommended maximum rim thickness at valve hole for the snap-in type valves listed in table is .156". For usage beyond this limit consult valve manufacturer.
2. Valve Core: TR C1 (short core only for TR 412 valve). Valve cap TR VC2, VC3
3. In the case of applications above 210 km/h (130 mph) it is recommended to use a clamp-in valve instead of a snap-in valve.



Code	Description	TR #	Rim Hole	B Max	C Max	D Ref
AA-412-10	Straight • Rubber	412	.453"	.66"	.78"	.88"
A-412B	90° Bend • Brass	412B	.453"	.66"	.78"	.88"
A-412C	Straight • Rubber • Chrome Sleeve	412	.453"	.66"	.78"	.88"
AA-413-50	Straight • Rubber	413	.453"	.66"	.78"	1.25"
EHA-413-100	Straight • Rubber	413	.453"	.66"	.78"	1.25"
A-413C	Straight • Rubber • Chrome Sleeve	413	.453"	.66"	.78"	1.25"
AA-414-50	Straight • Rubber	414	.453"	.66"	.78"	1.5"
EHA-414-100	Straight • Rubber	414	.453"	.66"	.78"	1.5"
AA-418-50	Straight • Rubber	418	.453"	.66"	.78"	2"
EHA-418-100	Straight • Rubber	418	.453"	.66"	.78"	2"
AA-423-10	Straight • Rubber	423	.453"	.66"	.78"	2.5"
AA-415-10	Straight • Rubber	415	.625"	.66"	1"	1.25"
AA-425-10	Straight • Rubber	425	.625"	.66"	1"	2"

HIGH PRESSURE SNAP-IN VALVES

Tubeless Snap-In Type Valves for high pressure applications • 600HP/602HP — 80 PSI Cold Inflation Pressure maximum

Code	Description	TR #	Rim Hole	C Max	D Ref
A-600HP	Specialty • High Pressure • Straight	600HP	.453"	.69"	1.27"
A-602HP	Specialty • High Pressure • Straight	602HP	.453"	.69"	2"



SPECIALTY VALVES

Code	Description	TR #	Rim Hole	Length
A-416	Clamp-In Tubeless Tire Valve for Passenger, Light Truck and Industrial Rims	416	.453" .625"	1.25"
A-523MS	High Performance Chrome Plated Low Profile Tire Valve	5991B	.453" .625"	1.15"
VS-902K	Ford F-Series Valve for Outer Accuride Steel Wheel • Brass	416S	.453"	1.96"
VS-962C	Ford F-Series Valve for Outer Accuride Steel Wheel • Brass	N/A	.453"	2.32"
VS-962WZ	Ford F-Series Valve for Outer Accuride Steel Wheel • Nickel	N/A	.453"	2.32"




VALVE CAPS

Code	Description	TR #	Qty
690	Dill Anodized Plastic Nitrogen Indicator Cap with Seal	N/A	100
A-VC8-100	Black Plastic Valve Cap	VC8	100



VALVE CORES

Code	Description	TR #	Qty
A-C1-HT-100-N	Standard Valve Core • High Temperature • Nickel Plated	C1	100
A-C1-HT-100	Standard Valve Core • High Temperature • Brass	C1	100

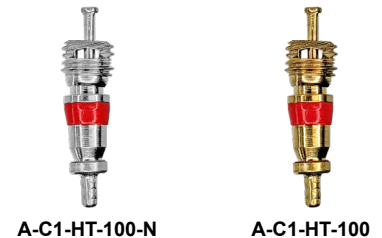

VALVE TOOLS



A-605-BH
4-Way Standard Valve Repair Tool • Black Hardened Steel



SRK22985
Valve Core Tool for Standard Bore Valve Cores • Screwdriver Handle



2-296
2-Way Valve Repair Tool • Combination valve core installer • Screws on valve mouth to open core



231940
Green polymer Valve Stem Puller and Installation Tool with built-in Valve Core Remover • Made in Germany of high performance plastic that will not bend or break



FW-70471
1/2" Wire Brush with Plastic Handle




2-308AC
Lever Type Valve Stem Puller • Heavy duty body with no bend • Deep notches for better grabbing of the rim



BRASS CLAMP-IN TRUCK VALVES - 570 Series



Code	Description	TR #	Rim Hole	A
A-500-10	Premier Performance Tubeless Truck Valve • Brass	500	.625"	2"
A-50023	Premier Performance Tubeless Truck Valve • Brass • 23° Bend	500-23	.625"	2"
A-501-100	Premier Performance Truck and Bus Tubeless Truck Valve • Brass	501	.625"	1.5"
A-571-10	Premier Performance Tubeless Truck Valve • Brass	571	.625"	3.38"
A-572-100	Premier Performance Tubeless Truck Valve • Brass	572	.625"	3.75"
A-573-100	Premier Performance Tubeless Truck Valve • Brass	573	.625"	4.38"
A-574-10	Premier Performance Tubeless Truck Valve • Brass	574	.625"	5"
A-575-10	Premier Performance Tubeless Truck Valve • Brass	575	.625"	2"



NOTES:

1. Valve Core: TR C1
2. Valve Cap: TR VC2, VC3
3. Recommended Nut Torque at Installation: 35-55 in-lbs

ALCOA O-RING VALVES & GROMMET VALVES

Code	Description	TR #	Rim Hole	Length
A-542-10	Premier Performance Alcoa O-Ring Valve	542	.382" / .394"	1.26"
A-543D-10	Premier Performance Alcoa O-Ring Valve • 60° Bend	543D	.382" / .394"	2.31" / 1.38"
A-543E-10	Premier Performance Alcoa O-Ring Valve • 75° Bend	543E	.382" / .394"	2.31" / 1.38"
A-544D-10	Premier Performance Alcoa O-Ring Valve • 60° Bend	544D	.382" / .394"	2.86" / 1.94"
A-545D-10	Premier Performance Alcoa O-Ring Valve • 60° Bend	545D	.382" / .394"	3.5" / 2.6"
A-545E-10	Premier Performance Alcoa O-Ring Valve • 75° Bend	545E	.382" / .394"	.98" / 2.6"
A-552-10	Premier Performance Alcoa Grommet Valve	552	.381"	1.259"
A-554D-10	Premier Performance Alcoa Grommet Valve • 60° Bend	554D	.381"	.98" / 1.94"
A-555D-10	Premier Performance Alcoa Grommet Valve • 60° Bend	555D	.381"	.98" / 2.6"



542



543D



543E



544D



545D



545E



552



554D



555D



METAL VALVE CAPS AND CAP/CORE TOOLS



33-0709

Alligator V2B Metal Double Sealing Screw On Valve Cap • Doesn't need to be removed to check air pressure or add air — gauging and inflating is done directly through the valve cap



A-VC3-100



Premier Performance Metal Dome Shaped Valve Cap • TR # VC-3 • Qty 100



VALVECAPR-PRO

ValveCapper® Pro 3-in-1 Valve Cap/Core Removal Tool • 11-3/4" • Holds onto caps for removing and replacing • Holds on to core for easy removal and installation

SWIVEL, TURRET, PLANETARY GEAR & STRAIGHT VALVES

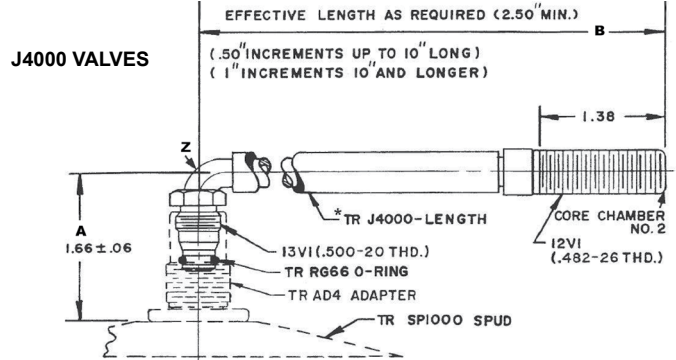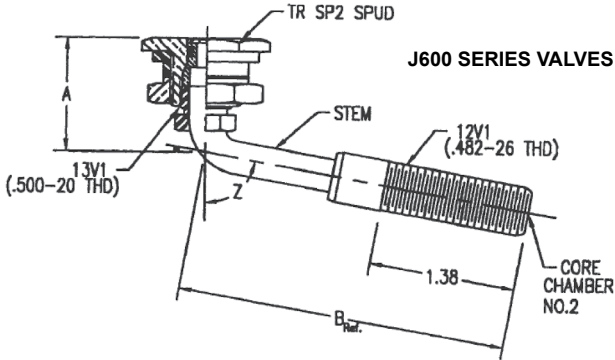

EXJ-653



A-J650



J-4000-4



J-4000-6



J-690-USA



J-691-USA



J-697-USA



EX-3150/1

Code	Description	TR #	Rim Hole	A	B	Z /Angle
EXJ-653	Dill Large Bore Swivel Valve	J-653	.812"	1.08"	2.5"	80°
A-J650	Dill Large Bore Swivel Valve with Rim Spud Assembly	J-650	.812"	1.08"	3.12"	80°
J-4000-4	Dill Large Bore Swivel Valve	J-4000-4	.812"	1.66" ± .06"	4"	90°
J-4000-6	Dill Large Bore Swivel Valve	J-4000-6	.812"	1.66" ± .06"	6"	90°

NOTES:

1. Valve Core: TR C2
2. Valve Cap: TR VC6, VC7, VC10
3. Recommended Torque at Installation: 70-80 in-lbs

Code	Description	TR #	Rim Hole	Length
J-690-USA	Dill Large Bore Turret Valve • 28° Bend	TRJ-690	.812"	5"
J-691-USA	Dill Large Bore Planetary Gear Wheel Valve	TRJ-691	.812"	3.125"
J-697-USA	Dill Large Bore Turret Valve • 25° Bend	-	.812"	5-1/2"
EX-3150/1	Dill Large Bore Straight Valve Stem	TRJ-670-2	.812"	1.4"



SCAN QR CODE TO VIEW FULL SECTION

TUBELESS LARGE BORE AIR LIQUID VALVES



A-618A



A-621A



A-623A



A-622A



A-936B



VH936B



A-618RSI

Code	Description	TR #	Rim Hole	Length
A-618A	Large Bore Air Liquid Valve • Clamp-In	TR618A	.625"	1-7/8"
A-621A	Large Bore Air Liquid Valve • 65° Bend • Clamp-In	TR621A	.625"	3"
A-623A	Large Bore Air Liquid Valve • 65° Bend • Clamp-In	TR623A	.625"	2-1/4"
A-622A	Large Bore Air Liquid Valve • 90° Bend • Clamp-In	TR622A	.625"	4-1/2"
A-936B	Large Bore Air Liquid Valve • Clamp-In	-	.625"	9/16"
VH936B	Large Bore Air Liquid Valve • Clamp-In	-	.453" .625"	9/16"
A-618RSI	Large Bore Air Liquid Valve • Snap-In	TR618A	.625"	1-7/8"

LARGE BORE VALVE ACCESSORIES

Code	Description	TR #
A-65658	Outside Large Bore to Standard Bore Adapter/Reducer	AD-1
A-AD1	Inside Large Bore to Standard Bore Adapter/Reducer	AD-1
A-SP2	Large Bore Tubeless Tire Spud • Rim Hole: .812"	TRSP2
N-1510	Large Bore Cap Gauge • 0-160 PSI	-
A-C2	Large Bore Valve Core • Short • Brass	TRC-2
A-675	Large Bore and Standard Bore Valve Core Removal Tool	-
5261	Large Bore Hex Cap Tool with Plastic Handle • 6-1/2"	-
EX-1525	4-way Large Bore and Air Water Valve Repair Tool	-
310H	Haltec Large Bore Air Water Core Ejector • 1/2" NPT	-
A-CH3	Air Liquid Core Housing • New Style Fast Flow • O-Ring Seal	TRCH-3
A-670P	Agricultural Rim Hole Plug • Rim Hole: .625"	-



A-65658



A-AD1



A-SP2



N-1510



A-C2




A-675



5261



EX-1525



310H



A-CH3



A-670P



plasteel®

HYBRID-LOCK™
PLASTIC + STEEL BODY

**HARDENED
STEEL CLIP**

**CURVED
APPEARANCE**

ALUMI-FLAKE™
METALLIC MATERIAL

**PLASTIC
FOR SOFTNESS**

**STEEL
FOR STRENGTH**



**RECYCLABLE
MATERIALS**



**EASY
APPLICATION**




**SCRATCHLESS
INSTALLATION**



**TECHNICIAN
APPROVED**

AVAILABLE IN: **MC** **FN** **AW** **IAW** **EN** **T** **P**

PROUDLY MADE IN CANADA



DOMESTIC ADHESIVES

- **MADE IN CANADA**
- Feature nano-coating for corrosion protection
- Features QuikStik® tape from WEGMANN with instant stick and strong bonding; or Ultra-Liner® tape from WEGMANN that delivers results in cold-weather and high performance applications
- Available in strips and rolls
- Available in black

FEATURING:
**Anti-Roll
Back Break
On All 20 lb.
Adhesive Rolls**



WITH OPTIONS
QuikStik® **ULTRA
LINER®**
ADHESIVE TAPE



PERFECT STEEL™ ADHESIVES

WITH
QuikStik®
ADHESIVE TAPE



- **IMPORTED FROM WEGMANN CHINA**
- Manufactured in our own OEM factory
- Features aftermarket standard powder coated segments for corrosion resistance
- Features QuikStik® tape from WEGMANN with instant stick and strong bonding
- Available in strips and rolls
- Available in black
- Unlike other imports, PERFECT STEEL™ is proven!

SKU	Description
200576FE	Steel QuikStik / .25 oz. / 3.00 oz. Strips / 48 per
200576FEBLK	Lead QuikStik Black / .25 oz. / Same as above
200576FER	Steel QuikStik / .25 oz. / 11 lb. Roll
200576FERBLK NEW	Steel QuikStik Black / .25 oz. / 11 lb. Roll
300224FE	Steel QuikStik / .50 oz. / 4.00 oz. Strips / 28 per
300224FEBLK	Lead QuikStik Black / .50 oz. / Same as above
300224FER NEW	Steel QuikStik / .50 oz. / 11 lb. Roll
300224FERBLK NEW	Steel QuikStik Black / .50 oz. / 11 lb. Roll

CLIP-ON WHEEL WEIGHTS

Prema Canada provides a wide selection of Clip-on Wheel Weights for most OEM vehicle applications, as well as after market wheels. Choose from Zinc, Plasteel® or Steel options to suit your needs.

Zinc


- Zinc appears in catalogue with a ZN designation
- Manufactured by molding
- 7.2 g – cm density
- Smallest physical size
- Used as original equipment on many vehicles
- Easier to install and remove than steel
- Zinc will not rust
- High quality coating

Plasteel®

- Plasteel appears in catalogue with a PS designation
- Stamped Construction
- 7.8 g – cm density
- Largest physical size
- Used as original equipment on some vehicles
- Easier to install than standard steel wheel weights
- Encased in a plastic shell to prevent corrosion

Steel

- Steel appears in catalogue with an FE designation
- Stamped Construction
- 7.8 g – cm density
- Larger size
- Used as original equipment on some vehicles
- May damage wheels during installation
- Coated to prevent corrosion



It is essential to refer to application charts or rim gauges to select the correct style of passenger wheel weight to fit your needs,

Clip Type	Applications	Zinc Codes	Plasteel® Codes	Steel Codes
P	Made for steel wheels and made to fit under hub caps	PZN-025 – PZN-300	PPS025 – PPS200	PFE025 – PFE300
MC	Used on most North American vehicles with alloy wheels	MCZN-025 – MCZN-300	MCPS025 – MCPS300	MCFE025 – MCFE300
IAW	Used on some European and some Asian vehicles with alloy wheels	IAWZN-005 – IAWZN-060	IAWPS05 – IAWPS60	IAWFE05 – IAWFE60
FN	Used on most Japanese vehicles with alloy wheels	FNZN-005 – FNZN-060	FNPS05 – FNPS60	FNFE05 – FNFE60
EN	Used on Mercedes, Audi and Volkswagen. Also used on many aftermarket alloy wheels with thin rim flanges	ENZN-005 – ENZN-060	ENPS05 – ENPS60	Unavailable
T	Used on some light trucks and SUVs with alloy or steel wheels	TZN-025 – TZN-300	TPS025 – TPS300	TFE025 – TFE300
AW	Used on most domestic vehicles prior to 1995 with alloy wheels	AWZN-025 – AWZN-300	AWPS025 – AWPS300	AWFE025 – AWFE300



STEEL ADHESIVE WHEEL WEIGHTS

Coated, lead-free

1/4 oz Weights

	Code	Brand	Segments	Coating	Strip Weight	Strips per Box	Segments per Box
STRIPS	200576FE	Perfect	1/4 oz	Grey	3 oz	48	576
	200576FEBLK			Black	3 oz	48	576
	SADHS25C	Fortune	1/4 oz	Grey	2.5 oz	65	650
	SADHS25BC			Black	2.5 oz	65	650
	EC0025GR			Grey	3 oz	48	576
	EC0025BK			Black	3 oz	48	576




200576FE



200576FEBLK

	Code	Brand	Segments	Coating	Roll Weight	Segments per Roll
ROLLS	200576FER	Perfect	1/4 oz	Grey	11 lbs	704
	200576FERBLK			Black	11 lbs	704
	SADHR25C	Fortune	1/4 oz	Grey	11 lbs	704
	SADHR25BC			Black	11 lbs	704
	ECOR025GR			Grey	11 lbs	715
	ECOR025BK			Black	11 lbs	715

200576FER

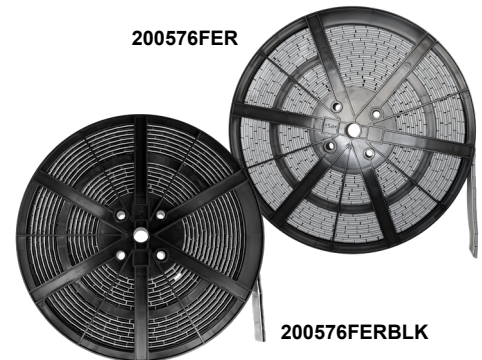

200576FERBLK

1/2 oz Weights

	Code	Brand	Segments	Coating	Strip Weight	Strips per Box	Segments per Box
STRIPS	300224FE	Perfect	1/2 oz	Grey	4 oz	28	224
	300224FEBLK			Black	4 oz	28	224
	SADHS50C	Fortune	1/2 oz	Grey	4 oz	40	320
	SADHS50BC			Black	4 oz	40	320
	EC0050GR			Grey	3 oz	48	288
	EC0050BK			Black	3 oz	48	288



300224FE



300224FEBLK

	Code	Brand	Segments	Coating	Roll Weight	Segments per Roll
ROLLS	300224FER	Perfect	1/2 oz	Grey	11 lbs	352
	300224FERBLK			Black	11 lbs	352
	SADHR50C	Fortune	1/2 oz	Grey	9 lbs	300
	SADHR50BC			Black	9 lbs	300
	ECOR050GR			Grey	9 lbs	300
	ECOR050BK			Black	9 lbs	300

300224FER



300224FERBLK



SCAN QR CODE TO VIEW FULL SECTION

STEEL ADHESIVE WHEEL WEIGHTS cont.

Coated, lead-free

1 oz Weights

	Code	Brand	Segments	Coating	Strip Weight	Strips per Box	Segments per Box
STRIPS	SADHS100C	Fortune	1 oz	Grey	4 oz	18	72
	SADHS100BC			Black	4 oz	18	72
	ECO100GR			Grey	6 oz	24	144
	ECO100BK			Black	6 oz	24	144




ECO100GR



ECO100BK

	Code	Brand	Segments	Coating	Roll Weight	Segments per Roll
ROLLS	ECOR100GR	Fortune	1 oz	Grey	10 lbs	161
	ECOR100BK			Black	10 lbs	161

ECOR100GR

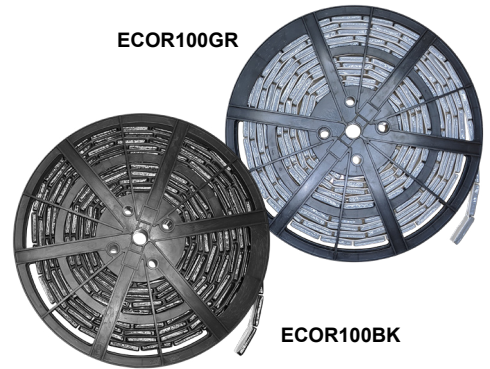

ECOR100BK

WHEEL WEIGHT TOOLS



25K

Wheel Weight Tool • Designed to install and remove clip-on wheel weights for passenger cars and light trucks • Plastic-coated handle provides a better grip



50K

Premium Clip-On Wheel Weight Hammer with "Clip Claw" Pliers



75K

Alloy Hammer • Replaceable soft acetate hammer face • Wooden handle • Rear mounted (replaceable) hardened steel "Clip Claw" horn



44011

StickPro Wheel Cleaning Spray • 22 oz bottle • Made for removing residue from adhesive wheel weights



2-RCT

Adhesive Wheel Weight Removal Tool • Chisel shaped end • Gentle treatment of aluminum and alloy wheels • Removes stick-on weights, decals, gaskets etc



IR-324

Adhesive Remover Air Tool • 3,700 RPM • 4" Pad • Includes 12 Eraser Pads • Designed to remove pinstripe tape, double-sided tape, adhesive and molding



IR-324-700-6

6 Eraser Wheel Pads for the Ingersoll Rand IR-324 Adhesive Removal Air Tool



EMZ45031

Emzone Citrus Degreaser • Heavy-duty multi-purpose degreaser formulated to cut and remove grease, dirt, grime, and oil from most surfaces • 390 g



BALANCING COMPOUNDS

Code	Description	Weight per Bag	Bags per Case
CAB01	Counteract Balancing Beads	1 oz	80
CAB02		2 oz	64
CAB03		3 oz	48
CAB04		4 oz	40
CAB05		5 oz	38
CAB06		6 oz	32
CAB08		8 oz	26
CAB10		10 oz	20
CAB12		12 oz	18
CAB14		14 oz	16
CAB16		16 oz	14

ECOXL03	Eco XL Balancing Beads	3 oz	96
ECOXL04		4 oz	92
ECOXL06		6 oz	64
ECOXL08		8 oz	52
ECOXL10		10 oz	40
ECOXL12		12 oz	36
ECOXL14		14 oz	32
ECOXL16		16 oz	28



Counteract Balancing Beads are the economical way to balance the vehicle wheel assembly for the lifetime of the tire. Made of coated glass spheres, our balancing beads will not cause damage to the inner liner of the tire, they won't clump, regardless of excess moisture and are TPMS compatible.



Code	Description	Weight per Bag	Bags per Pail
LFP-100	Magnum+ Balancing Beads	3 oz	24
LFP-150		4.5 oz	24
LFP-200		6.5 oz	24
MFP-250		8.5 oz	22
MFP-300		10.5 oz	18
MFP-400		13 oz	14
MFP-500		16 oz	12



LFP-150



MFP-300



MBP8KG

Code	Description	Weight per Pail
MBP8KG	Magnum+ Beads (loose, with scoop)	17.6 lbs



PREMA PROFESSIONAL TIRE REPAIR START-UP KIT

PCAB-STARTUP

Each cabinet includes a repair manual, decals, and one (1) of each of the following items:

Code	Description
PCAB-1	Wall-Mounted Storage Cabinet with Keyed Lock. Dimensions: 20" W x 29-1/2" L x 7" D
IR-327LS-A	Air Tire Buffer • 7/16" Hex Quick Change • 0.5HP • 3,000 RPM
RH100-S	Flared Contour Buffing Wheel With 3/8"-24 Inner Nut • 2" x 3/4"
PCC-2	Carbide Cutter • Length of Carbide: Regular • Injury Diameter 1/4" (6.35 mm)
940	Wooden handle Skiving Knife with tapered point tip • Blade Length: 4" (101 mm)
2-915	Spiral Probe and Cement Tool
2-936	1/8" x 1-1/2" Plastic Handled Tire Repair Stitcher • Corrugated Wheel
2-933	Innerliner Tire Scraper
PPC-16	Prema Pre-Buff Cleaner • Spray • 16 oz
PFC-8	Prema Ultra Fast Dry Vulcanizing Cement • Brush top can • 8 oz
PLOS-16	Prema Innerliner Overbuff Sealant • 16 oz
SB2088B	Small Handled Cleaning Brush • Brass Bristles
PBS-32	Prema Bead Sealer • Extremely thick / will not drip • 32 oz
PC-2	Prema Combi #2 with Guide Wire • Injury Size 1/4" • Box of 15
80250	Markal B Hex Tire Crayon • White • Box of 12
SLP-9211	1-7/8" x 3/8" - 24 Threaded Quick Change Adapter with Washer & Nut • Black hardened
SLP-9215	1/4" Quick Change Adapter • Black hardened

PCAB-STARTUP

All the items, tools and chemicals required to complete industry-standard tire repairs.

View our video:
Repair a Tire
Puncture using
Industry Standards



* All contents are also available individually

TIRE REPAIR INSERTS



PRI-2

Code	Description	Length	Qty per Box
PRI-1	Premafill Reinforced Narrow Vulcanizing Insert • Passenger and Light Truck • Thin • Orange	3-3/4"	50
PRI-2	Premafill Reinforced Standard Vulcanizing Insert • Regular • Blue	3-3/4"	50
PRI-3	Premafill Reinforced Vulcanizing Insert • Truck • Blue	5-1/8"	40
PRI-4	Premafill Reinforced Vulcanizing Insert • Earthmover • Blue	7-1/2"	25

CORDLESS TIRE BUFFER



Video
Review:




IR-G4911-K1

Ingersoll Rand 20V Cordless Tire Buffer, 7/16" Hex Quick Change, 3,000 RPM • Kit includes 1 - 4911 Cordless 20V Tire Buffer, 1 - BL2012 20V 2.5Ah Battery and 1 - BC1121 Single Bay Charger



COMBI REPAIRS & STEMS

Code	Brand	Description	Injury Size	Qty per Box
PC-1	Prema	Combi #1 with guide wire	1/8"	40
PC-2		Combi #2 with guide wire	1/4"	15
PC-3		Combi #3 with guide wire	5/16"	10
PC-4		Combi #4 with guide wire	3/8"	10
A-3	Rema	Minicombi A3 with guide wire	1/8"	50
A-6		Minicombi A6 with guide wire	1/4"	40
B-10		Minicombi B10 with guide wire	3/8"	20
KX-386	Kex	Round Combi with guide wire	1/8"	24
KX-387			1/4"	25
KX-388			3/8"	25
PCS-2	Prema	Stem #2 with guide wire	1/4"	20
PCS-3		Stem #3 with guide wire	5/16"	20
PCS-4		Stem #4 with guide wire	3/8"	20

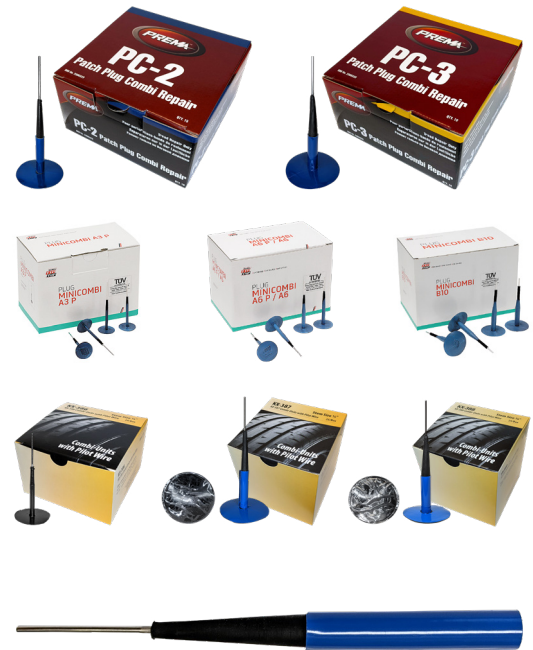

PCS-2

UNIVERSAL TIRE REPAIRS

Code	Brand	Description	Size	Qty per Box
PUR-2	Prema	Universal Round Repair 2	2"	50
PUR-3		Universal Round Repair 3	3"	50
PUS-2		Universal Square Repair 2	2"	100
PUS-3		Universal Square Repair 3	1-3/4"	100
PUS-4		Universal Square Repair 4	2-1/4"	50
UP-3	Rema	Universal Square Repair 3	1-1/16"	100
UP-6		Universal Square Repair 6	1-11/16"	50
UP-8		Universal Square Repair 8	2-3/16"	50
KX-UP-45	Kex	Universal Square Repair	1-1/4"	30
KX-UP-55			2-1/8"	30
PURO-30	Orange	Universal Round Repair	1-1/8"	120
PURO-50			1-15/16"	80
PUSO-45		Universal Square Repair	1-11/16"	80
PUSO-55			1-1/8"	80



RADIAL TIRE REPAIRS

Code	Brand	Description	W	L	Ply	Qty per Box
PR-109	Prema	Radial Repair #109	2"	3"	1	20
PR-110		Radial Repair #110	2-1/4"	3-1/4"	1	20
PR-112		Radial Repair #112	3"	4-1/4"	1	10
PR-114		Radial Repair #114	3-1/2"	5-1/4"	1	10
PR-115		Radial Repair #115	3"	3-1/4"	1	10
PR-120		Radial Repair #120	3-3/4"	5"	2	10
RAD-110	Rema	Radial Repair #110	2-3/4"	2"	1	20
RAD-115		Radial Repair #115	3"	3-1/2"	1	20
RAD-120		Radial Repair #120	3"	4-7/8"	2	10
KX-MX10	Kex	Radial Repair #110	2"	3"	1	20
KX-MX12		Radial Repair #112	3"	4"	1	10
KX-MX20		Radial Repair #120	3"	5"	2	10
PRO-110	Orange	Radial Repair #110	2"	2-7/8"	1	20
PRO-112		Radial Repair #112	2-7/8"	3-3/8"	1	25
PRO-114		Radial Repair #114	2-5/8"	4"	1	10
PRO-120		Radial Repair #120	3"	4-3/4"	2	10



PR-110



RAD-110



KX-MX12



PRO-112


BIAS TIRE REPAIRS

Code	Brand	Description	Size	Ply	Qty per Box
PB-1	Prema	Bias Repair #1	2-1/4"	1	25
PB-2		Bias Repair #2	3-14"	2	10
PB-3		Bias Repair #3	3-3/4"	2	10
PB-4		Bias Repair #4	4-3/4"	2	10
PB-5		Bias Repair #5	4-3/4"	4	10
PB-6		Bias Repair #6	6-1/2"	4	10
PN-0	Rema	Bias Repair #0	1-9/16"	1	50
PN-3		Bias Repair #3	4"	2	10
PN-4		Bias Repair #4	5-3/4"	2	10
KX-470	Kex	Bias-Ply Repair	3"	2	20
KX-471			4"	2	10
KX-472			5"	3	10



PB-2

PB-3



PN-0



PN-4



KX-470

KX-471



TIRE REPAIR CHEMICALS

For best practices, match all tire repair patches and chemicals to one brand.

Brand	Vulcanizing Cement	Pre-Buff Cleaner	Liner Overbuff Sealant
	Brush top can • Flammable • Nearly indestructible bond between the tire and repair unit • 8 oz	Spray • Flammable • Use with Scraping Tool to dissolve lubricants and contaminants, creating a clean surface prior to innerliner buffing • 16 oz	Brush top can • Flammable • Properly applied repair sealer creates an airtight seal around a finished repair, overbuff areas or porous tire innerliners • 16 oz
Prema	PFC-8	PPC-16	PLOS-16
Rema	BL-8F	70F	76F
Kex	KX-511F	KX-491F	KX-508F



TEMPORARY TIRE REPAIR INSERTS



Kex Fat Brown Posi-Cord String Inserts

Code	Size	Qty per Box
KX-361	4"	50
KX-362	8"	25



Kex Narrow Black Posi-Cord String Inserts

Code	Size	Qty per Box
KX-370	7"	50



KX-365

Kex Deluxe Temporary Repair Kit
• Includes: T-Handle Injury Probe and Split-End Insertion Tools, 1 Jar of Lubricant and 50 **KX-361** 4" Fat Brown Posi-Cord String Inserts

TIRE REPAIR TOOLS & ACCESSORIES



High Tensile Carbide Cutters

Code	Injury Size	Adapter Code
PCC-2	1/4"	SLP-9215
PCC-3	5/16"	SLP-9216
PCC-4	3/8"	5196593



2-925
Premafill Installation Tool
• Passenger



2-925T
Premafill Installation Tool
• Truck



2-925RT
Pistol Grip Injury Probe and Preparation Combination Tool



Markal B Paintstiks

Code	Shape	Colour	Qty per Box
80220	Round	White	12
80221	Round	Yellow	12
80250	Hex	White	12



RH107
Rubberhog Flared Contour Buffing Wheel • 2-1/2" Dia. • Adapter: **SLP-9212**



942
Wooden Handle Skiving Knife • Flexible rounded tip • 4" Blade




HD351
Heavy Duty Awl • 4-1/2" Blade • Screwdriver handle



SCAN QR CODE TO VIEW FULL SECTION

MOUNT/DEMOUNT TOOLS

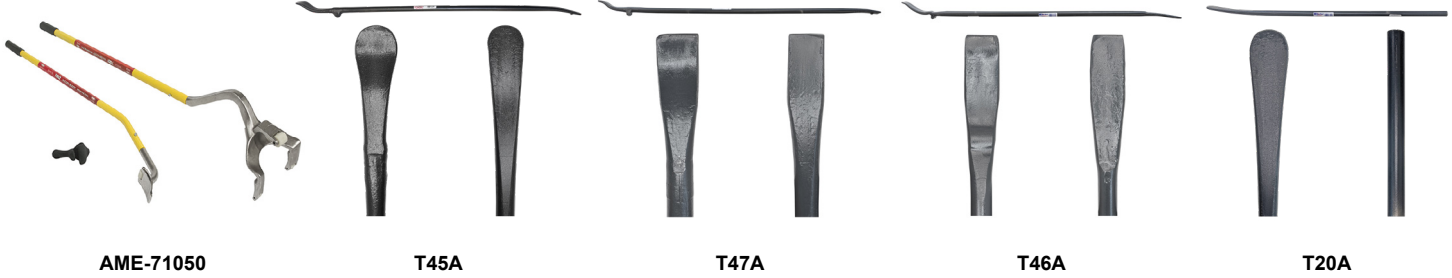


Code	Description	Length	Diameter	Weight
AME-71050	AME Golden Buddy Mount / Demount Truck Tire Removal System for 22.5" and 24.5" Tires / Wheels • Heavy duty steel construction ensures long life • Nylon rollers protect the bead • Tool Set includes: AME-71051 Demount Tool, the AME-71052 Mount Tool, and a Bead Keeper	39" / 42"	-	32 lbs / 10 lbs
T45A	Standard Tubeless Tire Mount / Demount Iron for Truck, Agricultural and Industrial Tires • Heat-treated for strength • Use in pairs • Tip ends insert easily and will not cut or rip bead or sidewall	37"	3/4"	4.6 lbs
T47A	Heavy Duty Straight Tubeless Mount / Demount Iron • Use on Standard and Large Truck Tires, including Industrial, Farm, Buses and Tractors • Heat-treated for strength • Use in pairs • Tip ends insert easily and will not cut or rip bead or sidewall	52"	1"	11 lbs
T46A	Straight Mount / Demount Tool • Use on Standard and Large Truck Tires, including Industrial, Farm, Buses and Tractors • Length 36" • Diameter 3/4" • Weight 4.5 lbs	36"	3/4"	4.5 lbs
T20A	Curved Tire Mount / Demount Spoon	30"	11/16"	3.1 lbs



T23A

Truck Lock Ring Remover • Designed to remove most Truck Lock Rings • A must-have for anyone mounting / demounting multi-piece rims • Use in pairs • Length 30" • Diameter 11/16" • Weight 3.1 lbs



GT-12894C

Polymer Coated Steel Truck Bead Keeper • Protects aluminum wheels from being scratched while it locks onto the flange of the wheel and holds the tire bead in place • Eliminates standing on the tire and/or chasing the bead around the wheel

BEAD SEATING AIR BLASTERS

3L, 6L, 10L and 14L tanks • The new BEAD BAZOOKA® utilizes an upgraded version of the trigger-operated rapid air release (RAR) valve technology found in the original BEAD BAZOOKA® models • The extra power it delivers allows it to be smaller and lighter while still allowing the user to seat even the most stubborn tire beads • Half the size twice the power • Serviceable/Replaceable RAR valve • Utilizes ultra-compact design • Anti-corrosion interior tank coating



HYDRAULIC BEAD BREAKERS



AME-11010 

AME Combi Bead Breaker • Used on Construction Wheels up to 25" • Works on Single, 2 and 3-Piece Wheels • Tool clamps hydraulically to the wheel and then breaks bead with 11 tons of force • 3.75" Stroke Length • Used with 10,000 PSI (700 BAR) Air/Hydraulic Pump • Weight 34 lbs



AME-11020 

AME Modified Combi Bead Breaker • Most parts interchange with common Bead Breakers • Larger clamp and feet allow the tool to easily clamp onto wheels • Compact design allows the tool to be used on the front or back side of wheel • Weight 38 lbs



AME-11076 

AME Diamond Back Aluminum Bead Breaker with protective carrying case • Lightweight aluminum reduces weight by 40% • Longer feet allow for better fit onto the wheel/rim • Feet fully engage rim flange and push against the tire bead • Weight 31 lbs



AME-11000 

AME OTR Giant Tire Bead Breaker • Only works on 5 piece wheels with bead loosening pockets • Most popular tool for breaking beads on earthmover tires sizes 25"-51" • 4-1/4" stroke ram • 13.8 tons of hydraulic force • Use with any 10,000 PSI (700 BAR) air/hydraulic pump • Weight 33 lbs

HYDRAULIC PUMPS & ACCESSORIES



AME-15920 

5 Quart Air / Hydraulic Pump with Steel Reservoir • Builds 10,000 PSI of pressure to fit the majority of tools on the market • Operates on 80-120 PSI of Inlet Air Pressure • Durable metal air motor assemblies • Weight 23 lbs




AME-16030 

8' Hydraulic Hose Only • 1/4" x 10,000 PSI Working Pressure • Complete with 3/8" NPT Hydraulic Coupler (AME-16060) and Adaptor (AME-16050)

BEAD BREAKING SLIDE BARS, WEDGES & HANDLES

Code	Description
AME-71500	AME Big Buddy Heavy Duty Slide Bar Bead Breaker with Spring • Easily breaks the most stubborn beads • User fatigue is reduced through spring-action tip, which reduces kick-back • Wedge tip is forced between the tire bead and wheel rim delivering the blow directly to the hammer tip • Heavy duty tool with 1 year warranty • Weight 24 lbs
T11E	Hickory Wood Handled Bead Breaking Wedge • Length 30" • Weight 8.5" lbs • Handle T11EH
T11ES	Wood Handled Bead Breaking Wedge with Grip Paint Handle • Length 30" • Weight 8-1/2 lbs • Handle T11EH-GRIP
T11EH	Replacement Hickory Wood Handle for T11E • Length 30"
T11EH-GRIP	Replacement Handle for T11 Series with Grip Paint Handle
B3033001GRIP	Replacement Handle for T11 Series with Grip Paint Handle • Length 30"



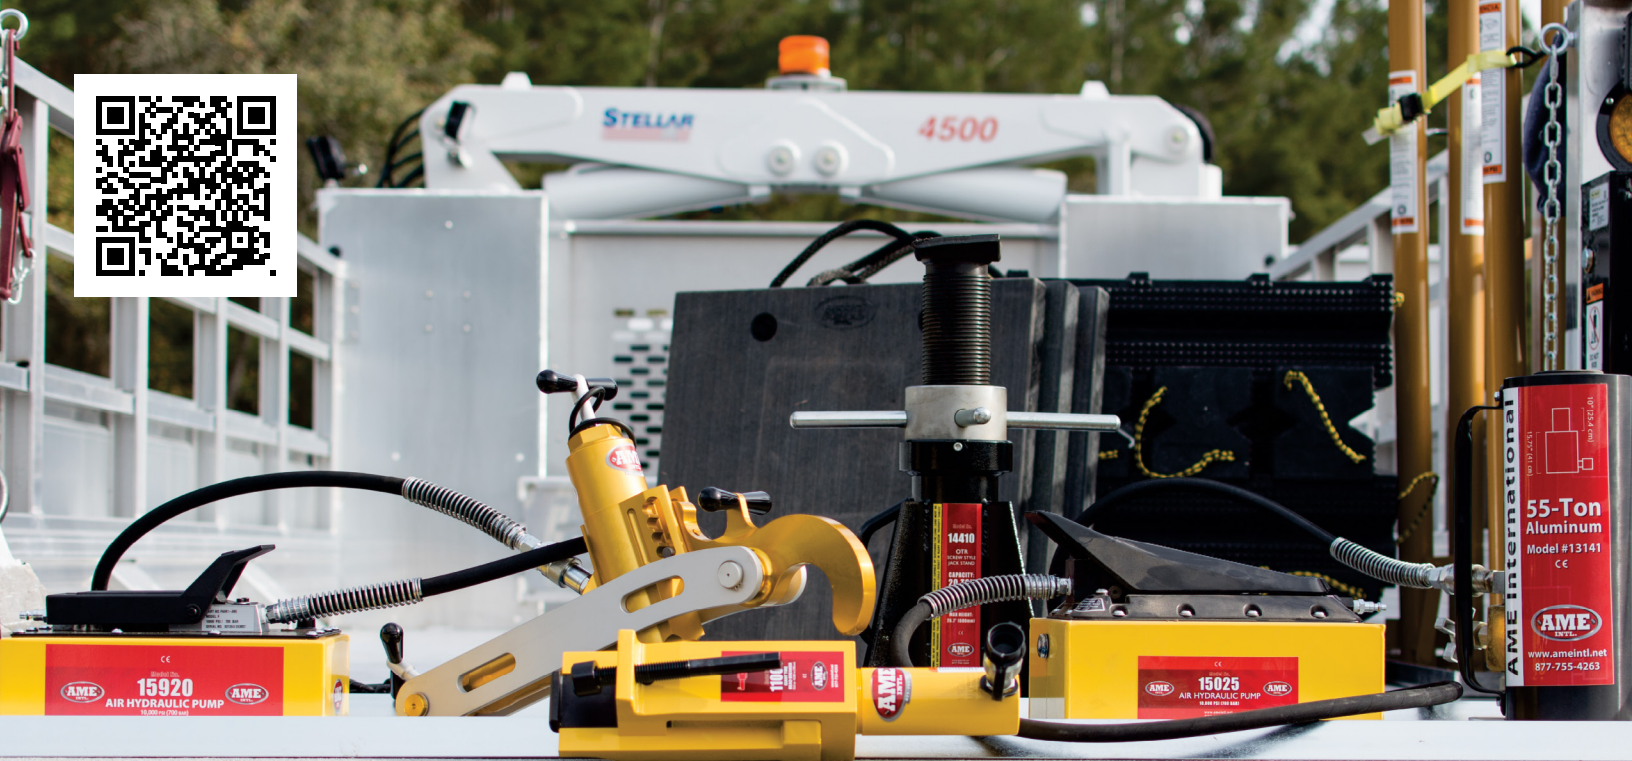

TIRE PROFESSIONALS INSIST ON



www.ameintl.net | jdecastro@ameintl.net
352.799.1111 | 226-962-8563

AUTOMOBILE • COMMERCIALE • AGRICOLE • OTR MINIER
AUTOMOTIVE • COMMERCIAL • AG / CONSTRUCTION • OTR / MINING



MOUNTING PASTES & COMPOUNDS

Code	Description	Volume	Mix Ratio
PEP-8	Prema Universal Mounting Paste • Provides excellent lubricity for mounting and demounting tires with minimal rim slip	7.7 lbs	1:1
PEP-8N	Prema Universal Mounting Paste • Low profile bucket		
2005	Murphy's Tire and Tube Mounting Compound can be used in its concentrated form or diluted in water • Amber colour	25 lbs	3:1
2180X	Rema Tip Top Concentrated Tire and Tube Mounting Compound for mounting tubeless tires or natural and synthetic tubes	25 lbs	4:1
2490	Rema Super Heavy Duty OTR Tire Mounting / Packing Compound • Will not separate or liquefy • Extra thick for superior bead packing	25 lbs	1:1
1515-25	Premier Performance Tire and Tube Mounting Compound • Great for OTR tire work • Temperature Range for use -25°C to +35°C	25 lbs	1:1



LIQUID LUBRICANTS

Code	Description	Volume	Mix Ratio
81511	Rema Tip Top Concentrated Liquid Tire Lubricant • Non-toxic • Contains no petroleum products • Lubricants can be applied by brush or spray bottle • Excellent lubrication • Superior "tack" and bead sealing qualities • Reduces tire/rim slippage • Near neutral pH factor	1 Gallon	1:1
81515		5 Gallons	
PTLC-1G	Prema Liquid Blue Tire Lubricant • Concentrated • Rust inhibitor added for better rim protection	1 Gallon	1:1 to 3:1
PTLC-5G		5 Gallons	
PTL-1G	Prema Liquid Blue Ready to Use Tire Lubricant • Greater lubricity for easier mounting/demounting • Dries tacky to prevent slipping on the rim • Rust inhibitor added to prevent rim corrosion	1 Gallon	1:1
2222-1	Premier Performance Concentrated Tire Mounting Lubricant • Economical • Rust Inhibitor added for better rim protection	1 Gallon	1:1 to 3:1
2023	Murphy's Tire and Tube Mounting Compound • Ready-to-use liquid for easy application • Soap-based • Easy to clean up • Non-toxic • Biodegradable • Moderate rust inhibition	5 Gallons	1:1
2053B	Rema Tip Top Super Slippery Bead Butter • Blue • Concentrated Mounting Liquid • Non-Toxic • No petroleum products • Can be applied by brush or spray bottle	1 Gallon	2:1
2054B		5 Gallons	
2055B		55 Gallons	



GRAPHITE LUBRICANTS

Code	Description	Volume	Mix Ratio
4444-5	Premier Performance Black Tire and Tube Mounting Lubricant • Rust retardant for metal wheel components • Ideal for aluminum and steel wheels and rims	5 lbs	1:1
4444-25		25 lbs	



PREMIUM BEAD SEALER

Code	Description	Volume
PBS-32	Prema Bead Sealer provides a seal between the bead area of the tire and rim • Extremely thick / will not drip • Flammable	32 oz
777	Premier Performance Bead Sealer is designed to prevent stubborn bead seepage once applied to rim, after it is remounted • Flammable	32 oz



RIM RELEASE

Code	Description	Volume
PREM8153		3.78 L
PREM8253	Prema Rim Release • Makes removing tires from rusted rims easier • Frees stubborn beads without special tools or equipment	18.9 L
PREM8353		205 L




TIRE SEALANTS

Code	Description	Volume
1212-1G	Premier Performance Tire Sealant • Canadian Made • Holds air pressure • Enhances casing life • Promotes retreadability	1 Gallon
1212-5G		5 Gallons



LUBRICANT BRUSHES & SWABS

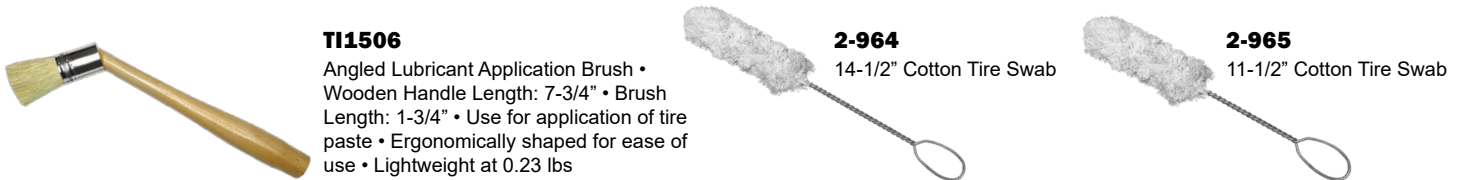

AUTOMOTIVE LUBRICANTS



AUTOMATIC TIRE INFLATORS & INFLATOR GAUGES



89XDA

Single Tire Automatic Inflator • Diecast aluminum enclosure • IP66 • Self calibrates every 6 minutes • Factory installed 1/4" x 1/4" MNPT plug in the base of the inflator • Operating range 5-145 PSI • Accuracy +/- 0.3 PSI



MW-60-4WAY

4-Way Automatic Tire Inflator • 145 PSI x 4 Outlets • Measures air pressure with 4 types of measurements: kPa, BAR, PSI and kg/cm2 • Pre-drilled holes for wall mount or mount to a tire cage with the use of an MW Stand Bracket • 110V with 1/4 Air Inlet • Inflate 4 tires from 0-145 PSI in 2 PSI Increments • Dimensions 9" x 10-1/2" x 3-1/2" • Includes (4) 8' Hoses



1991

Eurodairu Gauge - Michelin Type • Dial Type Air Line Service Gauge • Use when high visibility, accuracy and durability are important factors • Calibrated 10-170 PSI and 0.7-12 BAR • 2 lb increments • Includes a 5' Hose and a Euro Style Clip-On Chuck



AME-24861

OTR Whip Hose 20', 1/2" Ball Valve with Dial Gauge • Equipped with a safety coupler • 1/2" NPT connection, 3/8" ID for maximum air flow • Large bore chuck end only



AME-24867

AME Accu-Flate XL Digital Tire Inflator with 6' hose and clip-on chuck • 3-in-1 Function: Inflate, Deflate, and Measure Tire Pressure • Accuracy: ± 2 PSI • Fully Automated • 0-174 PSI • 1/4" NPT female inlet • 2 AAA batteries included • Backlight LCD with 9 second auto off

PENCIL & DUAL FOOT GAUGES

Code	Description
5900	Digital Passenger Pressure Gauge • 3.5-100 PSI • LCD Reading • Automatic Shut-Off • Over mold rubberized plastic • CE Approved
5600-PREMA	Prema Mid-Range Pencil Gauge • Passenger • 4-Sided Nylon Bar — 2 sides calibrated 10-75 PSI in 5 PSI units, other 2 sides kPa 70-500
VH663	Low-Low Pressure Gauge • AG & OTR • 4-Sided Nylon Bar — 2 sides calibrated 1-20 lbs in 1/2 lb units, other 2 sides kPa 10-135
VH664	Dual Foot Truck Gauge • Short • 4-Sided Nylon Bar — 2 Sides Calibrated 20-120 lbs in 2 lb units, other 2 sides kPa 150-810
7275R	Dill Dual Foot Long Truck Service Gauge • Great for servicing tilted Inner Dual Valves • 2-Sided Metal Indicator Bar • Calibrated 10-150 lbs in 2 lb units • Recalibration feature
7263	Dill Straight Push-On 30° Reverse Angle Short Truck Gauge • 4-Sided Nylon Indicator Bar • All 4 sides calibrated 20-120 PSI in 2 PSI increments • Black poly finish • Made in the USA
S-929	Straight Push-On 30° Reverse Angle Short Truck Gauge • 4-Sided Nylon Indicator Bar — 2 sides calibrated 20-120 PSI in 2 PSI increments, other sides 120-820 kPa in 20 kPa increments • Made in the USA • Gauge has a chrome body finish
7285R	Dual Straight Foot Long Service Gauge • Straight Chuck used for Inner Dual Valves • 30° Reverse Angle Chuck for Outside Dual Valves • 2-Sided Metal Indicator Bar • 10-150 lbs in 2 lb units • Recalibratable
SG-3	Recalibrateable Straight Push-On 30° Reverse Angle Long Truck Gauge • External Calibration feature that allows the use of a slot screwdriver to Recalibrate • 2-sided Black Metal Indicator Bar • Calibrated 10-150 PSI in 2 PSI increments on both sides • Black textured powder coat finish
VHP668	Straight Push-On and 30° Reverse Angle Long Truck Service Gauge • 2-Sided Nylon Indicator Bar • Both sides Calibrated 10-150 PSI in 2 PSI increments • Gauge has a black textured power coat finish



SCAN QR CODE TO VIEW FULL SECTION


AIR LIQUID & OTR GAUGES

Code	Description
VH660	Air Liquid Tractor Gauge for Air and Liquid Filled Tires • 4-Sided Nylon Bar — 2 sides calibrated 5-50 lbs in 1 lb units, other sides 35-310 kPa
7233	Large Bore Swivel Ag/OTR Tire Gauge • Nylon Indicator Bar • 10-150 PSI
7235	Large Bore Swivel Ag/OTR Tire Gauge • Metal Indicator Bar • 10-150 PSI • Recalibratable



EURO CHUCKS

Code	Description
6293-C	Euro Style Chuck and Clip • 1/4" Hose Barb • Firmly locks onto valve while inflating the tire • Open
6293-D	Euro Style Chuck and Clip • 1/4" NPT Female End • Closed
6293-E	Euro Style Chuck and Clip • 1/4" NPT Female End • Open
IN-20	Core Removal and Tire Inflation Chuck reduces inflation time by 50% • Features Clip-On Style Chuck • Made of durable steel, brass, and polycarbonate • 1/4 Female NPT • Ideal for nitrogen purging/inflation • Retractable core housing allows safe removal/replacement of valve core

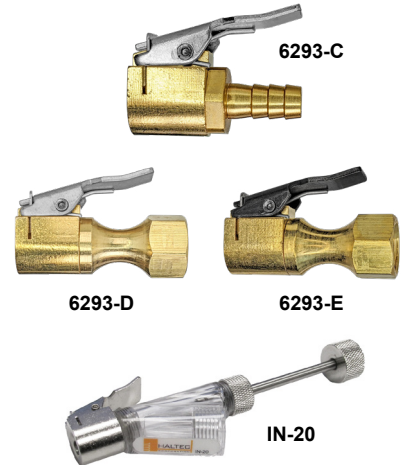

DUAL FOOT & LARGE BORE CHUCKS

Code	Description
6175	Dual Foot Straight On and 30° Reverse Angle Lock On Air Chuck • For inner dual wheel hard-to-reach valves on tractor, dual wheel truck and bus tires • Black poly finish • Made in the USA • 7" Length • Closed
VHP698	Straight On and 30° Reverse Angle Dual Foot Lock-On Air Chuck • For inner dual wheel hard-to-reach valves on tractor, dual wheel truck and bus tires • Pushes or pulls on tire valve • Length 6" • 1/4" Female NPT • Closed end for use on air lines • Black finish
VHP698L	Straight On and 30° Reverse Angle Dual Foot Lock-On Air Chuck • For inner dual wheel hard-to-reach valves on tractor, dual wheel truck and bus tires • Pushes or pulls on tire valve • Length 14" • 1/4" Female NPT • Closed end for use on air lines • Black finish
EX-4660-A	Large Bore Clip-On Air Chuck • Securely locks onto the valve when the clip is pushed forward • 1/4" Female NPT • Closed



SAFETY INFLATION CAGES



MIC-2

Portable 2 Bar Safety Inflation Cage • Certified for inflating tires up to 130 PSI • Compact and lightweight • Folds down to 7-18" H for easy storage • Meets or exceeds OSHA Standard 29 CFR 1910.177 • Dimensions: 25-3/4" L x 21-1/8" W x 57" H • Maximum Tire Size: 50" OD x 16" W • Weight: 59 lbs



MIC-4

Truck 4 Bar Safety Inflation Cage • Certified for inflating tires up to 130 PSI • Meets or exceeds OSHA Standard 29 CFR 1910.177 • Dimensions: 31-3/4" L x 26-1/4" W x 57-1/2" H • Maximum Tire Size: 47" OD x 19" W • Weight: 147 lbs



TREAD DEPTH GAUGES



Code	Description
5800	Dill Digital Tread Depth Gauge • Displays in mm, inches, and fractions • The LCD display is in 1/32" increments (makes switching from traditional mechanical gauge simple) • The zero function allows you to zero the gauge at any point, making readings quick and extremely accurate
5123	Dill Tread Depth Gauge • Range: 0 – 1" in 32nds and 0 - 25 mm in 1 mm increments
5127	Dill Colour Coded Tread Depth Gauge with Metal Indicator Bar • Shows Red - Yellow - Green • 0 - 32 in 32nd increments
5131	Haltec OTR T-Bar Tread Depth Gauge • 2 Piece Gauge made up of Slide Tube and Indicator • Calibrated 0 - 6" in 32nd increments and 7 - 152 mm Metric • Tubing spans tread lugs on Off-Road Tires

TIRE SPREADERS



AME-73100

AME Air Operated Tire Spreader with stand • For passenger / RV / light truck tires • Wide platform for stable work surface • Adjustable light

AME-73200

AME Automatic Tire Spreader • Air lift allows operator to repair without lifting • Heavy gauge steel • Lamp included • Air regulator / lubricator included • Weight 310 lbs

50-RB

Rep Boy Floor Mounted Manual Tire Spreader with rollers and tilt • Portable • Heavy duty steel construction • Repair platform rotates 360° • Spreading claws fit 13" - 20" passenger and light truck tires • Oversized base-plate provides safe and stable workstation

WHEEL DOLLIES & TIRE CARTS



Code	Description
AC-WT1500NT	Hydraulic Wheel Trolley with a handle that facilitates easy turning of large wheels • Wheel Sizes: Min. Ø 39.37" - Max. Ø 94.48" • Wheel Width: Max. 47.24" • Capacity: 1.5 t • Easy handling of the largest wheels in the world • A handle facilitates easy turning of the wheel on the trolley • A simple switch for easy jaw expansion or retraction
AC-WTA500	AC Hydraulic Wheel Trolley for Use on Vans, Trucks and Buses • Adjustable Lifting Arms for Wheel Sizes 10.5" - 51" • 0.5 Ton Capacity • Pedal Operated Pump leaves both hands free • Flexible and ergonomic design for the easy removal of wheels and brake drums • Lifting Arms with Roller Bearings for easy rotation of the wheel into the correct position • Bracket for easy securing of the wheel while transporting • Nylon Castor Wheels
GT-G471105	Winntec Heavy Duty Wheel Dolly • 3 Position Rollers Accommodates Tire / Wheel Assemblies from 6.5" - 24.5" • 551 lb Lifting Capacity • Heavy-duty industrial bearings • 3 positions for rollers depending on tire size
GT-G472270	Winntec Wheel Assist — Gen 2 • Handles all Passenger Tires including Run-Flats • Easily lift heavy tire/wheel assemblies • Reduces physical strain • Ergonomically Correct • Maintenance-free
GT-Y471106	SAFERGO Truck Wheel Dolly with Shock Absorbing Castors and Hydraulic Lifting Bottle Jack built within the frame • Lifting Capacity 350 lbs • Reduces back strain • Includes Gaiter O-LINE-ER® • Collapsible handle frame
MTC	Martins Tire Rider Tuff - Tire cart • Toughest tire cart on the market with its 550 lb loading capacity • Carry 8 tire/wheel assemblies of up to 35" OD • 2-year warranty + lifetime warranty on spring mechanism • Rubber wheels are solid and flat free



SCAN QR CODE TO VIEW FULL SECTION

PASSENGER & LIGHT TRUCK STUDS



Code	Brand	Description
TS-11	Road Grip	Standard #11 Steel Jacket Tire Studs
TS-12	Road Grip	Standard #12 Steel Jacket Tire Studs
TS-13	Road Grip	Standard #13 Steel Jacket Tire Studs
TS-15	Road Grip	Standard #15 Steel Jacket Tire Studs
TS-16	Road Grip	Standard #16 Steel Jacket Tire Studs

Code	Brand	Description
11-ALU-9	Road Grip	Standard #11 Aluminum Jacket Tire Studs
12-ALU-9	Road Grip	Standard #12 Aluminum Jacket Tire Studs
13-ALU-9	Road Grip	Standard #13 Aluminum Jacket Tire Studs
15-ALU-9	Road Grip	Standard #15 Aluminum Jacket Tire Studs
16-ALU-9	Road Grip	Standard #16 Aluminum Jacket Tire Studs

TIRE STUD SYSTEMS & GUNS



BW-K500A

Tire Studding System • Includes the Studding Stand # BW-K5A, Motorized Feeder # BW-FP9A and Stud Gun # TSIT-9



TSIT-9

Bruno Wessel 9 mm Tire Stud Installation Tool • The standard of the industry • Automatic, lightweight, easy to use and maintain • Handles TSMI #11-17 stud sizes

ARCTIC O-RINGS

O-Rings for Tubeless Rims • Temperature range -65°F to 180°F (Marked with green ink) • Spliced O-Ring with Sonic Weld Technology • Manufactured to major OEM specifications



Code	Size
AOR-224TG	1/4"
AOR-225TG	1/4"
AOR-325T	3/8"
AOR-329T	3/8"
AOR-333T	3/8"

TIRE REGROOVERS & BLADES



PCU-115


115 V Prema Tire Regroover • 4 Level Temperature Switch • Approved German TUV Certification with CE Conformity • Comes without Plug End • Compatible with Cutting Blades from 3 mm to 28 mm




GR3/R-3



GR3/W-4



GR3/R-1 - GR3/R-5



GR3/W-1 - GR3/W-6

RILLFIT TIRE REGROOVER BLADES

Dimensions (mm)

Code	Shape	A	B	C	D	Qty
GR3/R-2	Round	5	7	8	21	20
GR3/R-3	Round	6	10	15	21	20
GR3/R-4	Round	8	12	16	23	20
GR3/R-5	Round	10	12	18	25	20
GR3/W-1	Angled	3	7	5	21	20
GR3/W-2	Angled	5	7	6	21	20
GR3/W-3	Angled	7	10	10	22	20
GR3/W-4	Angled	9	12	13	24	20
GR3/W-5	Angled	11	12	15	23	20
GR3/W-6	Angled	23	12	28	24	10



GT-BB3L2 – for ATV, motorcycle, car, and light commercial vehicles

GT-BB6L2 – for motorcycle, car, light truck, and heavy commercial vehicles

GT-BB10L2 – for car, light truck, heavy commercial, and light agricultural vehicles



BEADBAZOOKA®

GT-BB3L2 - GT-BB6L2 - GT-BB10L2

- Half the size twice the power
- Serviceable/Replaceable 2" RAR valve
- Utilizes ultra-compact design
- Anti-corrosion interior tank coating

GT-G432021

- Low Profile
- 20 Ton capacity
- Chrome main ram
- Includes air filter and air regulator
- Min 5.75"
- Max 10.31"



20T LOW PRO AIR/HYD. BOTTLE JACK

GT-GB38L

- The tank is CE/ASME certified
- Lightweight aluminum tank
- RAR valve with trigger release
- Internal proprietary coating protects against rust



38L RAR BEAD BOOSTER

GT-432020

- 20 Ton capacity
- Chrome main ram
- Includes air filter and air regulator
- Min 10.00"
- Max 18.50"



20T AIR/HYD. MANUAL BOTTLE JACK

GT-G471147HD

- Spring loaded
- Push / Pull release
- 441 lb. capacity



SMART CART

GT-G472270

- Easily lift heavy tire/wheel assemblies
- Reduces physical strain
- Ergonomically Correct
- Maintenance-free
- 132 lb. capacity



WHEEL ASSIST GEN 2

GT-G432024

- 24 Ton Capacity
- Extension screw
- Heavy-duty wheels
- Min 8.46"
- Max 17.36"



24T AIR SERVICE JACK

GT-G471105

- Gaither O-LINE-ER® included
- Heavy-duty industrial bearings
- Adjustable 3 position rollers
- For all wheels from 6.5" – 24.5"
- Accommodates super singles
- 551 lb. capacity



TRUCK WHEEL DOLLY

GT-Y471106

- Lifting capacity 350 lbs.
- Reduces back strain
- Includes Gaither O-LINE-ER®
- Collapsible handle frame



SAFERGO TRUCK TIRE DOLLY

GT-G420303


- Strategically placed pumping pistons
- Complete pumping stroke always utilized
- Professional universal joint release valve
- Precise and safe lowering of jack each time
- Equipped with a handle protector
- Min 5.12"
- Max 19.29"



3T TURBO LIFTER GARAGE JACK



Gaither
PROFESSIONAL EQUIPMENT



IMPACT WRENCHES - 1/2" & 3/4" DRIVE



CP-7748



CP-7748-2



AIR-1431-2



IR-2235QTIMAX



IR-2235TI2MAX



IR-2235TIMAX



IR-231HA-2



IR-W7152-K22



IR-2145QIMAX



IR-261

Code	Drive	Brand	Description
CP-7748	1/2"	Chicago Pneumatic	Brute Impact Wrench • Max. torque reverse 960 ft-lb • 3 power settings • Lightweight composite housing • Durable twin hammer clutch • 360° swivel air inlet • One-handed forward / reverse (ring system)
CP-7748-2 (2" Extended Anvil)			
AIR-1431-2 (2" Extended Anvil)		Aircat	Provides 800 ft-lb maximum torque and 1,000 ft-lb of loosening torque • Hard hitting twin hammer mechanism delivers maximum power • Grip is ergonomically designed to perfectly fit the hand, providing unmatched comfort for the user • Cross bolt forward/reverse and power management control • Triple heat treated Ni-Cr-Mo alloy steel hammer mechanism parts and anvil provide ultimate reliability • Grey Pneumatic® Thin Wall Flip Socket (19 mm / 21 mm) • 6 lbs
IR-2235QTIMAX (Quiet Technology • 2" Extended Anvil)		Ingersoll Rand	Lightweight Balanced Air Impact Wrench • 930 ft-lb Nut-Busting Torque • 8,500 RPM • Titanium Hammer Case • Impact and Chemical Resistant Housing • Optimized for the vehicle repair industry, heavy trucks, tire lanes, fleet maintenance, body shops, general industrial use • 2 Year Warranty • 4.6 lbs
IR-2235TI2MAX			
IR-2235TIMAX (2" Extended Anvil)			
IR-231HA-2 (2" Extended Anvil)			
IR-W7152-K22 (Kit)			20V High-torque Cordless Impact Wrench Kit with Standard Anvil • Kit includes 2 - 5.0Ah IR-BL2022 Batteries , Tool Charger and Carry Bag • Powerful Brushless Motor delivers durability and efficiency • Variable Speed Trigger and 4 IQ Power Control System Settings
IR-2145QIMAX	3/4"	Ingersoll Rand	Quiet Heavy Duty Impact Wrench • 1,350 ft-lb Maximum Reverse Torque • Built to last in rugged conditions • Provides access in tight spaces • Only 7.4 lbs
IR-261			Air Impact Wrench • Super Duty • 1,100 ft-lb Torque • Friction Ring Retainer • Pistol • 12.4 lbs



IMPACT WRENCHES - 1" DRIVE



CP-7782-6

AIR-1992-A

IR-285B-6

IR-285B-S6

IR-W9691-K4E

Code	Drive	Brand	Description
CP-7782-6 (6" Extended Anvil)	1"	Chicago Pneumatic	Heavy Duty Impact Wrench • Free Speed 5,160 RPM • Working Torque 370-1,475 ft-lb • Max. Torque 1,920 ft-lb • Pinless closed reinforced rocking dog impact mechanism • Ergonomic side handle • Integrated protective cover on the clutch housing • Full teasing trigger • Regulator with integrated forward / reverse with 3 position power settings in both directions • 22.2 lbs
AIR-1992-A (6" Extended Anvil)		AirCat	Straight Impact Wrench • Provides 1,800 ft-lb maximum torque and 2,000 ft-lb of loosening torque • 5,000 RPM • Low maintenance pin-less hammer provides ultimate reliability and added hitting power • Features enlarged inner cavity of rotating "D" handle grip • Combined forward/reverse and power management switch • 27.8 lbs
IR-285B-6 (6" Extended Anvil)		Ingersoll Rand	Air Impact Wrench • Heavy Duty • 1,475 ft-lb Torque • Friction Ring-Thru-hole Retainer • D-handle Inside Trigger • The 285B combines exceptional power, control and durability • It delivers 1,770 ft-lb of maximum torque @ 120 PSI, with 5,250 RPM free speed and a high-efficiency, 6-vane motor • The swept-back 285B handle provides excellent maneuverability • 12.61 lbs
IR-285B-S6 (#5 Spline • 6" Extended Anvil)			
IR-W9691-K4E (Kit • 6" Extended Anvil)			20V Cordless Impact Wrench 4 Battery Kit • 3,000 ft-lb Torque • Friction Ring-Thru-hole Retainer • D-Handle • Best-in-class power-to-weight ratio • 3,000 ft-lbs of nut busting torque, 2,200 ft-lbs of tightening torque • Impact Wrench is 25.9 lbs

AIR GRINDERS, SANDERS & SCALERS



IR-3445

Ingersoll Rand 0.88 HP Super Duty Air Angle Grinder / Cut-off Tool • 4.5" Wheel • 12,000 RPM Max Free Speed • Rear Exhaust • Average Air Consumption 10 CFM • Air Consumption at Load 41 CFM • Air Inlet 1/4" NPTF • 3.44 lbs



IR-313A

Ingersoll Rand 7" Angle Sander, Composite Pad, 5,000 RPM, 0.5 HP • 7" pad that works up to 5,000 RPM • Side handle exhaust that blows air away from the work area, you never have to worry about debris getting in your space • 4.5 lbs



IR-125

Ingersoll Rand Standard Duty Air Needle Scaler • 4,800 BPM • Includes 19 Needles — each with a 1/8" diameter • 1-1/8" Stroke • Ideal for surface preparation work involving cleaning and removing paint, rust, dirt or weld slag • 6.24 lbs

AIR TOOL OIL & GREASE

Code	Description
IR-50P	Ingersoll Rand Air Tool Oil • 473 ml
ATOOLICE-160Z	ICEFREE Pneumatic Tool Lubricant • Remains Fluid at -55° F (-48° C) • Non-Toxic • Biodegradable • De-Icing • Superior Lubrication Qualities • Absorbs Moisture • Prevents Freezing • Restores Power • Enhanced Tool Protection • Provides Rust Protection • Prevents Tool Dieseling • 16 oz
IR-100-1-LB	Air Care Lubrication Kit for Ingersoll Rand Impact Wrenches • Includes 10Z4 oil, 115-4T Grease and Grease Gun



SCAN QR CODE TO VIEW FULL SECTION

premacanada.ca | 1-800-268-6311 | sales@premacanada.ca | 33

IMPACT SOCKETS - 1/2" DRIVE



PREM-1412MD

14 Piece 1/2" Drive Deep Metric Impact Socket Set
• Sizes: 10 mm, 11 mm, 12 mm, 13 mm, 14 mm, 15 mm, 16 mm, 17 mm, 18 mm, 19 mm, 21 mm, 22 mm, 26 mm, 27 mm



PREM-1312D

13 Piece 1/2" Drive Deep SAE Impact Socket Set • Sizes: 7/16", 1/2", 9/16", 5/8", 11/16", 3/4", 13/16", 7/8", 15/16", 1", 1-1/16", 1-1/8", 1-1/4"



PREM-1511TP

11 Piece 1/2" Drive Extra Thin Wall Protector Impact Sockets • Fractional Sizes: 3/4", 13/16", 7/8", 15/16", 1", 1-1/16"; Metric Sizes: 17 mm, 19 mm, 21 mm, 22 mm, 23 mm



PREM-1503TP

3 Piece 1/2" Drive Extra Thin Wall Protector Set • This set contains one of each of 17 mm, 19 mm and 21 mm impact sockets with protector sleeve

Code	Description	Size
PREM-2021MD	1/2" Drive Metric 6 Point Deep Length Impact Socket	21 mm
PREM-2192DT	1/2" Drive Extra Thin Wall Flip Socket	19 mm / 21 mm
PREM-2392D	1/2" Drive Thin Wall Flip Socket	19 mm / 21 mm
PREM-2349D	1/2" Drive Thin Wall SAE Flip Impact Socket	7/8" / 15/16"



PREM-2021MD



PREM-2192DT



PREM-2392D



PREM-2349D

IMPACT SOCKETS - 3/4" DRIVE



PREM-8032

11 Piece 3/4" Drive Standard and Deep Length Impact Socket Set with Metal Case • Deep: 3/4", 13/16", 7/8", 1", 1-13/16", 33 mm; Thin Wall Deep: 1-1/16", 1-1/8", 1-1/4"; Deep Budd: 1-1/2"; Square: 13/16"

IMPACT SOCKETS - 1" DRIVE



PREM-9152

10 Piece 1" Drive Truck Wheel Impact Socket Set • Standard: 7/8", 15/16", 1", 1-13/16"; Deep: 33 mm; Thin Wall Deep: 1-1/16", 1-1/8", 1-1/4"; Deep Budd: 1-1/2"; Square: 13/16"



PREM-9153

10 Piece 1" Drive Standard and Deep Length Impact Socket Set • Deep: 33 mm, 35 mm, 41 mm; Deep Budd: 1-1/2"; Thin Wall Deep: 1-1/16", 1-1/8", 1-1/4"; Square: 13/16", 17 mm, 21 mm

*Thin and extra thin impact sockets are not covered by any manufacturers warranties.



TORQUE WRENCHES



Code	Drive	Brand	Description
C3FR250F	1/2"	Precision Instruments	Split-Beam Torque Wrench with Flex Ratchet Head • 40-250 ft-lb • 5 ft-lb increments
C4D600F	3/4"	Precision Instruments	Split-Beam Torque Wrench with Flex Ratchet Head • 200-600 ft-lb • 10 ft-lb increments
NB-120110		Norbar	Industrial 4AR-N Torque Wrench • Dual Scale • 150-600 ft-lb • Accuracy: ± 4 • Push-Through Ratchet allows 2 direction torqueing • New handle is more comfortable and guides hand to correct position • Can be split and packed in 2 parts
C5D600F		Precision Instruments	Split-Beam Torque Wrench with Flex Ratchet Head • 200-600 ft-lb • 10 ft-lb increments
NB-120115-1	1"	Norbar	5AR-N Torque Wrench • Dual Scale • 200-750 ft-lb • Back Break action • Robust with an unmistakable torque signal • Split for ease of storage and transportation
AME-67720K		AME	TorqIT Air Pneumatic Torque Gun Kit • Range: 500-2,000 ft/lb • Includes Torque Gun, carrying case & air regulator

CHROME PASSENGER & LIGHT TRUCK WHEEL NUTS

Our selection of Premier Performance Chrome Wheel Nuts are made with high quality chrome-plated steel that ensures simple installation, longevity and robust performance.

Code	Description	Qty
A-LM001-10-50	12 mm x 1.5 Right Thread • Hex 13/16" • 36 mm length	50
A-LM019-10-50	12 mm x 1.5 Right Thread • Hex 3/4" • 35 mm length	50
A-LM030-14-30	14 mm x 1.5 Thread • Hex 21 mm • 54 mm length	30
A-LM030-16-30	14 mm x 2.0 Thread • Hex 21 mm • 54 mm length	30
A-LM041-14-30	14 mm x 1.5 Thread • Hex 22 mm • 46 mm length	30
A-LM045-10-30	12 mm x 1.5 Thread • Hex 19 mm • 43 mm length	30
A-LM859-10-40	12 mm x 1.5 Thread • Hex 21 mm • 36 mm length	40



TRUCK WHEEL STUDS & NUTS



715SI
3/4"-10 Thread x
2-15/16" Lug Stud



333B
M22 x 1.5 Flange
Cap Nut • Hex
33 mm



SN-M22
Skirt Nut® M22 x 1.5 with Hex Cap is
the world's only patented 22 mm Wheel
Fastener for Hub-Piloted Wheels



SCAN QR CODE TO VIEW FULL SECTION

STUD, LUG NUT & HUB CLEANERS



CAB-STK-13AD



AME-37330



AME-37350



CAB-WMK



AME-37500

Code	Application	Description
CAB-STK-13AD		Automotive Stud / Hub Cleaning Kit • Includes 12 mm, 13 mm, 14 mm, 16 mm stud cleaning brushes with 13 mm hub cleaning disc and stud brush cleaning tool with adapter • Also includes Low Speed Air Driver with Forward / Reverse Control
AME-37330	Passenger / LT	AME Hub Buddy XL Lug/Hub Surface Cleaner • Used with 1/2" impact wrench • Removes rust, corrosion and build-up from wheel stud, drums and tire rim • Includes 1 cleaning disc head
AME-37335		Replacement Cleaning Discs for AME-37330 • 6 Pack
AME-37350		AME Hub Bro Impact Wheel Hub Cleaner • Features a large diameter for cleaning wheel mounting surface • Used with 1/2" impact wrench • Diameter 6.3" x 2.56" • Strip-away style abrasive
AME-37355		Replacement Abrasive Pad for AME-37350
CAB-WMK	HD Truck	Counteract Commercial Wheel Cleaning Kit with Low Speed Air Driver • Clean hub piloted commercial applications • Includes preloaded Stud Cleaner, Replacement Brushes, Safety Goggles, 1/2" Drive Adapter and Hex Key
AME-37500		AME Hub Buddy Truck Version Lug/Hub Surface Cleaner • Used with 1/2" impact wrench • Cleaning Disc will remove rust and corrosion leaving mating face clean for install • Includes 1 cleaning disc head
AME-37522		Replacement Cleaning Discs for AME-37500 • 10 Pack

LUG NUT / WHEEL LOCK REMOVERS & WHEEL GUARDS




2300K

12-Piece Passenger and Light Truck Wheel Lug Nut Removers • Use when key not available • Removes damaged lug nuts • Tapered left-hand thread grips tapered or straight threads • Also works on hex nuts • 1/2" drive



78537

Steelman Pro 16-Piece Locking Lug Master Key Set • Designed to remove locking lug nuts on aftermarket wheels • Includes 16 double hex-headed hex and tuner style keys • Made of heat-treated chrome vanadium steel and finished with corrosion resistant black oxide



60102-5903

Wheel Guard • 22 mm Stud Diameter • Standard • 10 Hole • 285 mm Hub Piloted

O-RINGS

Haltec Off-The Road Standard O-Rings for Tubeless Rims • Used to seal tire beads on Grader, Earthmover and Off-The-Road Rims

Code	Description	Code	Description
H-OR-220TG	Haltec O-Ring • 220T OTR • 20 x 1/4"	H-OR-320T	Haltec O-Ring • 320T OTR • 20 x 3/8"
H-OR-224TG	Haltec O-Ring • 224T OTR • 24 x 1/4"	H-OR-325T	Haltec O-Ring • 325T OTR • 25 x 3/8"
H-OR-232T	Haltec O-Ring • 232T OTR • 32 x 1/4"	H-OR-333T	Haltec O-Ring • 333T OTR • 33 x 3/8"
H-OR-25T	Haltec O-Ring • 25T OTR • 25 x 1/4"	H-OR-335T	Haltec O-Ring • 335T OTR • 35 x 3/8"



AIR/HYDRAULIC BOTTLE JACKS & LIFT CYLINDERS



Code	Brand	Capacity	Description	Min. Height	Max. Height	Weight
AME-14455	AME	20 t	Jackzilla features an In-Line Regulator • Includes a 10" x 10" Jack Plate	9.7"	18.5"	35 lbs
AME-14460	Titan	20 t	Chrome ram • Aluminum air motor • Heavy duty return springs	9.7"	18.5"	38 lbs
GT-G432020	Winntec	20 t	Equipped with an air regulator • Chrome Ram, Welded Base and Return Springs	10"	18.5"	38 lbs
AME-14461	Titan	20 t	Low Profile • Welded base • Chrome Pump Piston and Ram • Extension Screw	5.8"	10"	21 lbs
GT-G432021	Winntec	20 t	Low Profile • Welded base • Chrome Ram • Aluminum Air Motor • Includes Air Filter and Air Regulator	5.75"	10.31"	24.25 lbs
AME-13120	AME	55 t	Lightweight Aluminum Cylinder for easy handling and placing under vehicles • Includes Shut-Off Valve to allow the pump to be removed while the ram is extended • Aluminum Base for stability during field use • AME-13120 and AME-13121 Stroke: 6" • AME-13140 Stroke: 10"	12.25"	18.25"	29 lbs
AME-13121				11.75"	17.75"	29 lbs
AME-13140				16.25"	26.25"	38 lbs

HYDRAULIC FLOOR JACKS



Code	Brand	Capacity	Description	Min. Height	Max. Height	Weight
GT-G420303	Winntec	3 t	High quality durable Turbo Floor Jack	5.12"	19.29"	94.7 lbs
AC-DK20Q	AC Hydraulic	2 t	European-made Quick Lift Floor Jack	3.14"	19.5"	68 lbs
AME-14350	AME	4 t	Lightweight Forklift Jack • Specially designed seals	2.25"	16"	69 lbs



AIR/HYDRAULIC FLOOR JACKS



GT-3531



GT-4532



GT-G432024



AC-25-2



AC-50-2



AME-14140

Code	Brand	Capacity	Description	Min. Height	Max. Height	Weight
GT-3531	Gaither	35 t	Durable A/H Floor Jack with solid base • Long handle	7.3"	16.7"	93 lbs
GT-4532	Gaither	45/20 t	2-Stage A/H Floor Jack • Built-in Water Separator • Long, one-piece handle	5.9"	16.53"	99 lbs
GT-G432024	Winntec	24 t	Air Service Jack • Equipped with an extension screw and extension pegs • Stroke 5.55"	8.46"	17.36"	92.59 lbs
AC-25-2	AC Hydraulic	25/10 t	2-Stage A/H Jack for Buses and Trucks • Designed for heavy-duty, intensive commercial use • 2 Height Steps 10.82" and 14.96"	7.08"	14.96"	132.27 lbs
AC-50-2	AC Hydraulic	50/25 t	2-Stage A/H Jack for Heavy Buses and Trucks • Designed for heavy-duty, intensive commercial use • 2 Height Steps 13.38" and 17.71"	8.7"	17.71"	176.37 lbs
AME-14140	Titan	22 t	A/H Service Jack with Extension Saddles	8.27"	20.67"	110 lbs


CRIBBING BLOCK SETS, JACK PLATES & STANDS

AME Cribbing Blocks are certified and tested • Multiple shapes and sizes • Interlocking or aggressive non-slip surface • Non-conducting plastic resists most oils and chemicals • Does not splinter like wood • Made from 100% recycled plastic

Code	Description	Includes	Lanyard Colour
AME-15255	10-piece Industrial Cribbing Set	(3) AME-15210 (6) AME-15230 (1) AME-14465	Yellow Blue N/A
AME-15260	12-piece Industrial Cribbing Set	(12) AME-15230	Blue
AME-15662	42-piece Industrial Cribbing Set	(42) AME-15230	Blue



AME-15210



AME-15230



AME-14465

Code	Description	Lanyard Colour
AME-14464	50 Ton Capacity Jack Plate • 12" x 12" x 1" • 5 lbs	Orange
AME-14468LT	100 Ton Capacity Jack Plate • 24" x 24" x 2" • 24 lbs	Black



AME-14464



AME-14468LT

AME-15002

3 Piece Heavy Duty Steel Crib Kit • Includes: 3", 6" and 9" High Stands — Durable, will not bend or warp • Recessed area on cribbing fits 7" Square Plate on 55 Ton Cylinders • Can be stacked with other AME Steel Crib Stands • Will not slide • Use individually or stack together



AME-15002



WIRE WHEELS & CUP BRUSHES

Code	Description
E367	3" Knot Type Wire Wheel • 1/4" Mounted Shaft • Wire Gauge 0.014
EA-13583	4" Knot Type Wire Wheel • 3/8" Arbor Hole • Wire Gauge 0.014
C204	2-3/4" Knot Type Wire Cup Brush • 5/8" - 11 Arbor Hole • Wire Gauge 0.020
EA-17100	3-1/2" Cable Twist Cup Brush • 5/8" - 11 Arbor Hole • Wire Gauge 0.020



E367



EA-13583



C204



EA-17100

HAND CLEANERS & DISPENSER



5930443

Rema Tip Top Super Hand Cleaner • 11 L



PHC-SUPER

Prema Heavy Duty Hand Cleaner • Superior cleaning ability for hard to remove dirt and grime • Gentle to the skin • Suitable for daily use • Does not clog drains • 5 L



PHC-DISP

Prema/Rema Hand Soap Dispenser

PIG MATS

PIG Mat lasts 2X longer than ordinary mats for fewer change-outs. It absorbs oils, coolants, solvents and water; just about any mess you need to clean up!

Code	Description	Dimensions
MTY-25100	PIG Mat Lightweight Mat Pad • Box of 100	15" x 20"
MTY-25201	PIG Mat Lightweight Mat Pad • Roll	15" x 50'
MTY-25300	PIG Mat Mediumweight Mat Pad • Box of 100	15" x 20"
MTY-25400	PIG Mat Mediumweight Mat Pad • Roll	30" x 150'



NITRILE GLOVES

BLACK NITRILE GLOVES, 6 mil

Extra strength 6 mil VOLT powder-free black nitrile gloves • Latex-free • 100 gloves per box, 50 pairs per box • Touchscreen compatible

Code	Size
FG-BK1201-SM	Small
FG-BK1202-MD	Medium
FG-BK1203-LG	Large
FG-BK1204-XL	Extra Large
FG-BK1205-2XL	Extra Extra Large



ORANGE NITRILE GLOVES, 8 mil

Extra strength 8 mil GRIP powder-free orange nitrile gloves • Latex-free • 100 gloves per box, 50 pairs per box • Touchscreen compatible

Code	Size
FG-OR7101-SM	Small
FG-OR7102-MD	Medium
FG-OR7103-LG	Large
FG-OR7104-XL	Extra Large
FG-OR7105-2XL	Extra Extra Large



SCAN QR CODE TO VIEW FULL SECTION

TIRE BAGS

Code	Description	Dimensions	Size	Qty per Roll
3-TBLRG-250	High quality Tire Bags • 1 mm Thickness	33" x 6" x 44"	Large	250
3-TBLRG-IMAGE	High quality Tire Bags • 1 mm Thickness • Print your company logo, address or any custom message • 80 rolls minimum • Allow 4-5 weeks for production	33" x 6" x 44"	Large	250
3-TBXLRG-125	Extra large Tire Bags • 1.25 mm Thickness	32" x 15" x 48"	Extra Large	125



3-TBXLRG-125

FLOOR MATS, PLASTIC SEAT & STEERING WHEEL COVERS

Code	Description	Dimensions	Qty per Roll/ Box
FM16X22-500	Floor Mat - Regular Waffle Style • 8pt Paperboard	16.5" x 22"	500
FMPB16X22-400	Floor Mat - Waffle Style • 8pt Paperboard with plastic backing	16.5" x 22"	400
3-SCE-500	Slip N' Grip Plastic Seat Covers • Economy clear film • 0.5 mm Thickness	32" x 13" x 39"	500
3-SCP-250	Slip N' Grip Plastic Seat Covers • Premium clear film • 0.7 mm Thickness • Roll	32" x 13" x 42"	250
3-SCPBX-250	Slip N' Grip Plastic Seat Covers • Premium clear film • 0.7 mm Thickness • Box	32" x 13" x 42"	250
3-SWC-500	Slip N' Grip Clear Plastic Steering Wheel Covers • Double cloth band • Elastic design	24"	500

FM16X22-500



3-SCP-250



3-SCP-250


ROLOC GRINDING DISCS



Provides a fast, efficient method for grinding, cleaning blending, leveling and finishing all types of metal • Twist-lock • Aluminum oxide cloth • 25,000 RPM

Code	Description	Grit	Qty
SRK3230GT-100	2" Roloc disc	36	100
SRK3250GT-100	2" Roloc disc	50	100
SRK3280GT-100	2" Roloc disc	80	100
SRK3330GT-100	3" Roloc disc	36	100
SRK3350GT-100	3" Roloc disc	50	100
SRK3380GT-100	3" Roloc disc	80	100

SURFACE CONDITIONING DISCS



Shark Industries Quick Change Surface Conditioning Discs for high-performance cleaning and deburring • Removes grind marks, rust and coatings • Each conformable, non-woven disc features a Type R quick-change locking system that is easily attached to the backing pad • Swap out an old disc quickly and get back to work • Use with right-angle and die grinders • 25,000 RPM • Colour coded to reflect grit

Code	Description	Grit	Qty
SRK13062	2" Brown	Coarse	25
SRK13003	2" Brown	Coarse	50
SRK13019	3" Brown	Coarse	25
SRK13018	2" Burgundy	Medium	25
SRK13004	2" Burgundy	Medium	50
SRK13027	2" Blue	Fine	25



Counteract® WHEEL PRO

Commercial Stud & Hub Cleaner



EASY SNAP-TECH DESIGN

- Completely new ergonomic tool and brush design
- Easily switch from stud cleaning to hub/wheel cleaning in a matter of seconds
- Two tool bodies available to cover both the automotive and commercial markets
- Full aluminum anodized body



Wheel Pro XL
CAB-WPXL-T22

WHEEL PRO XL

Covers over 90% of all commercial truck wheel-end applications



22mm Stud Brush
CAB-WPXL-SB22



60mm Hub Brush
CAB-WPXL-HB22



Wheel Pro
CAB-WP-T12

WHEEL PRO

Covers a large majority of automotive/light truck and trailer applications




12mm Stud Brush
CAB-WP-SB12



14mm Hub Brush
CAB-WP-SB14



40mm Hub Brush
CAB-WP-HB140



50mm Hub Brush
CAB-WP-HB150

Counteract® Socket Pro

Deep impact sockets work in cases of corroded and rounded lug-heads for commercial wheel and fastener applications.

Manufactured with quality chrome molybdenum alloy steel for superior torque and durability.

COMPATIBLE ON AT LEAST 6 DIFFERENT FASTENER TYPES:

6-Point 50% Rounded-Off Star Drive Square Spline 12-Point



Scan the QR code to see the beads in action.

- #1 internal balancer
- Easy throw in bag
- Increase fuel economy
- Longer lasting tire life
- No damage to inner liner
- Save time in the shop
- Can be injected through valve stem



**Serving Canada coast-to-coast for over 70 years.
Over 20,000 items for all your tire and wheel service needs
in the following categories and more:**

**Tire Repair Materials
Tire Repair Tools
TPMS
Valves & Accessories
Wheel Balancing Supplies
Air & Cordless Tools
Impact Sockets
Air Lines & Fittings
Air Inflation Tools
Tire Service Chemicals & Lubricants
Tire Changing Tools & Accessories
Tire Service Tools
Wheel Service Tools
Jacks & Accessories
Shop Supplies
Automotive Parts
Automotive Supplies
Equipment
Shop Tools
Retread & Section Repair Tools
Repair Parts**