

PREMA

TIRE AND WHEEL SERVICE SOLUTIONS

SPRING 2025

Driving your business

with exceptional
products and service

NEW PRODUCTS

Page 1)

The latest technology
and supplies

AUTEL MAXIPMS MX-sensor 1 SENSOR



FAST INSTALLATION
PRESS RELEASE
INTERCHANGEABLE
VALVE STEMS



THE BEST SELLING
AFTERMARKET  SENSOR
IN NORTH AMERICA

99% VEHICLE
COVERAGE
ORIGINAL EQUIPMENT FIT FORM & FUNCTION



PROGRAMMABLE
UNIVERSAL TPMS



MAX SIGNAL
STRENGTH

BLUETOOTH LOW
ENERGY TPMS SENSOR

- PRE-PROGRAMMED
- TESLA-READY
- PROGRAMMABLE FOR BLE-EQUIPPED VEHICLES



MAXIPMS ITS600

HANDHELD TPMS SERVICE & DIAGNOSTIC TABLET

- Wireless Touchscreen/Android 9.0
- Activates, Reads and Relearns All Known Sensors
- Program AUTEL MX-Sensors to replace 99% of TPMS sensors on the vehicles on the road today
- On-Tool DOT Tire Registration with CIMS Account
- Enhanced, At-a-Glance Diagnostics Status Screen + TPMS Health Report
- Read/Erases All System Codes and Perform OLS, BMS, SAS & EPB
- Compatible with Autel's new Tesla-ready & programmable Bluetooth Low Energy TPMS Sensors



SET UP AUTOAUTH ON YOUR ITS600
WATCH NOW

MAXIPMS TS900

3-IN-1 TPMS, ADVANCED DIAGNOSTICS, & SERVICE TABLET



Includes all features & functions of the ITS600 plus...

- Android 11 OS
- Perform Bi-directional Active Tests & Special Functions
- Extensive Service Menu with direct access to over 40 maintenance tasks
- Generate Detailed Pre- & Post-Scan Reports
- Wi-Fi sharing and printing

AUTEL®

1.855.288.3587 | AUTEL.COM | FOLLOW US @AUTELTOOLS

NEW PRODUCTS

PREMA

**TIRE AND WHEEL
SERVICE SOLUTIONS**

AIR TOOLS



Gaither
PROFESSIONAL EQUIPMENT

GT-BB14L3

14L Bead Bazooka with 3" Rapid Air Release Valve (RAR). This model will fit nicely between the current GT-BB10L2 and GT-GB38L Bead Seater options • For use on Commercial OTR and AG tires • Aluminum body for easy handling and an all new 3" Rapid Air Release (RAR) Valve • 145 PSI / 10 bar pressure • 3-way Control Cluster • Anti-corrosion Interior Tank Coating • Trigger Release • Recoil-reducing Barrel • Weight: 14.5 lbs • 1 year warranty

*****PRE-ORDER NOW - ARRIVING SUMMER 2025**

AIRCAT
PNEUMATIC TOOLS

AIR-1992-A

1" Straight Impact Wrench with 6" Extended Anvil • 1,800 ft-lb maximum torque and 2,000 ft-lb of loosening torque • 5,000 RPM • Low maintenance pin-less hammer provides ultimate reliability and added hitting power • Features enlarged inner cavity of rotating "D" handle grip • Combined forward/reverse and power management switch • Triple heated Ni-Cr-Mo alloy steel hammer mechanism parts and anvil provides ultimate reliability • Combined through hole and friction ring socket retainer • Rubberized protective motor housing cover to protect from damage • Cranked back side assist handle to improve access to deep rim wheels • 27.8 lbs

IR Ingersoll Rand®

IR-G4911-K1

20V Cordless Tire Buffer, 7/16" Hex Quick Change, 3000 RPM • Kit includes Includes 1 - 4911 Cordless 20V Tire Buffer, 1 - BL2012 20V 2.5Ah Battery and 1 - BC1121 Single Bay Charger • Pneumatic has met its match. Introducing the world's first 20V tire buffer – the G4911 Cordless Tire Buffer from Ingersoll Rand®. Capable of 45 repairs on a single 2.5Ah battery, the G4911 makes tire repair easy – whether it's quick work on passenger vehicles or tackling tough repairs on heavy equipment. The patent-pending compact IQV20™ cordless design with angled battery interface provides greater tool accessibility inside small tires without the maneuverability restrictions of an air hose • 2.78 lbs with battery

*****PRE-ORDER NOW - ARRIVING SUMMER 2025**



**Specialty
Products
Company®**

**HEAVY DUTY
ALUMINUM ALLOY
TRUCK AXLE SHIMS**



Code

Description

| | |
|--------------|--|
| 10705 | Width - 4.0" Degree - 0.5° Length - 6.5" |
| 10712 | Width - 4.0" Degree - 1.0° Length - 6.5" |
| 10722 | Width - 4.0" Degree - 1.5° Length - 6.5" |
| 10732 | Width - 4.0" Degree - 2.0° Length - 6.5" |
| 10742 | Width - 4.0" Degree - 2.5° Length - 6.5" |
| 10752 | Width - 4.0" Degree - 3.0° Length - 6.5" |



SCAN QR CODE TO VIEW FULL SECTION

premacanada.ca | 1-800-268-6311 | sales@premacanada.ca | 1

PREMA

TIRE AND WHEEL
SERVICE SOLUTIONS

NEW PRODUCTS



2236MAX Series 1/2" IMPACT WRENCH

Versatility meets power in the new Ingersoll Rand 1/2" pneumatic impact wrench. The patented* Drive Xchange System™ lets you switch out anvils without clunky adapters that drain your tool's power.



Drive
Xchange
System™



IR-2236QTI2MX
2" Extended Anvil

IR-2236QTIMAX
1/2" Standard Anvil

IR-2236QPTIMX
1/2" Standard Pin Anvil

These and many other
anvils available

**Quiet • 1500 ft-lb Torque •
Titanium Hammercase • Pistol**



PIG MATS



PIG Mat lasts 2X longer than ordinary mats for fewer change-outs. It absorbs oils, coolants, solvents and water; just about any mess you need to clean up!

- Lasts 2X longer than ordinary mats for fewer change-outs; more plants worldwide use PIG Mat than any other brand
- Multiple layers of 100% polypropylene are thermally bonded to make PIG Mat the strongest mat on the market; won't rip, tear or fray even when saturated
- Exclusive dimple pattern speeds wicking of liquid throughout mat for faster, easier cleanup
- Highly absorbent, fine-fiber construction won't leave liquids or fiber residue behind
- Absorbs most common industrial liquids - oils, water, solvents, coolants and more
- Absorbed leaks and drips blend right in; dark gray colour hides grime so mat stays on the job longer



MTY-25100
PIG Mat Lightweight Mat Pad
15" x 20" • Box of 100



MTY-25201
PIG Mat Lightweight Mat Pad
15" x 50' Roll



MTY-25300
PIG Mat Mediumweight Mat Pad
15" x 20" • Box of 100



MTY-25400
PIG Mat Mediumweight Mat Pad
30" x 150' Roll

ENGINE OIL DRAIN PLUG & GASKET ASSORTMENT KITS

The handy assortment trays make finding the right drain plug/gasket fast and easy!



MTY-32C-06
Engine Oil Drain Plug & Gasket Assortment Kit • 223 pieces, including Top 16 Drain Plugs, Top 16 Gaskets, and a Pictorial Template.



MTY-32D-06
Engine Oil Drain Plug Assortment Kit • 190 pieces, including Top 24 Drain Plugs (standard, oversized, dog point, with molded gasket) and a Pictorial Template.



MTY-32G-06
Engine Oil Drain Plug Gasket Assortment Kit • 585 pieces, including Top 24 Gaskets (aluminum, fiber, copper, crushable, metal/rubber), and a Pictorial Template.



SCAN QR CODE TO VIEW FULL SECTION

premacanada.ca | 1-800-268-6311 | sales@premacanada.ca | 3

BRAKE & PARTS CLEANER



EMZ45214 EXOTIC BRAKE & PARTS CLEANER – 10% VOC

Patent-Pending formula quickly dissolves and removes grease, oil, brake fluid, road grime and dirt from brake parts, CV joints, disc pads, drums, and other components • Deep cleaning and fast drying • Cleans more effectively than the standard 10% VOC formulation • 390g aerosol can



EMZ45270 EXOTIC BRAKE & PARTS CLEANER – 10% VOC 18.9L PAIL W/ PULL-UP SPOUT

Patent-Pending formula quickly dissolves and removes grease, oil, brake fluid, road grime and dirt from brake parts, CV joints, disc pads, drums, and other components • Deep cleaning and fast drying • Cleans more effectively than the standard 10% VOC formulation

EMZ45271 EXOTIC BRAKE & PARTS CLEANER – 10% VOC 18.9L PAIL - THREADED FOR SPIGOT

Spigot sold separately.



FBS-50300

FBS Pump & Spray Bottle • 1.0 litre • Features FPV Seal • Made of FPE technical plastics with an FPV seal in the nozzle • Can handle corrosive liquids like brake cleaner and multi-purpose degreasers with blends containing acetone, toluene, xylene, heptane, hexane and naphtha • Not for use with acid based products due to metal components



FBS-50275

FBS-50200 Pump and Spray Bottle - KPV Seal Repair Kit • Includes Brass Nozzle, O-Ring 5.0 x 1.5, Bottle O-Ring 36.0 x 4.0, O-Ring 3.0 x 2.7, Retaining Disk, Clip, Screw, O-Ring 5.0 x 1.5, Plunger O-Ring 14.0 x 3.5

PUMP & SPRAY BOTTLES / REPAIR KITS



BLACK NITRILE GLOVES, 6 mil

Extra strength 6 mil VOLT powder-free black nitrile gloves provide maximum protection, performance and durability.

| Code | Size |
|----------------------|-------------------|
| FG-BK1201-SM | Small |
| FG-BK1202-MD | Medium |
| FG-BK1203-LG | Large |
| FG-BK1204-XL | Extra Large |
| FG-BK1205-2XL | Extra Extra Large |

NITRILE GLOVES



Latex-free, these gloves offer great chemical resistance in addition to superior puncture and abrasion resistance • 100 gloves per box, 50 pairs per box • Touchscreen compatible



ORANGE NITRILE GLOVES, 8 mil

Extra strength 8 mil GRIP powder-free orange nitrile gloves provide maximum protection, performance, and durability.

| Code | Size |
|----------------------|-------------------|
| FG-OR7101-SM | Small |
| FG-OR7102-MD | Medium |
| FG-OR7103-LG | Large |
| FG-OR7104-XL | Extra Large |
| FG-OR7105-2XL | Extra Extra Large |



REPLACEMENT TPMS SENSORS

33500S EZ-SENSOR



Dual Band Programmable TPMS EZ-Sensor with Snap-In Valve • Combines 314.9, 315 and 433 MHz applications into a single SKU

PREM-ONE PREMA U-PRO



U-Pro Dual Frequency TPMS Sensor • 315 / 433 MHz • Interchangeable valve with the PREM-207 or 20018

PREM-NFC PREMA U-PRO NFC



U-Pro Dual Band NFC TPMS Sensor • Smart Phone Programmable • 315 / 433 MHz • Interchangeable valve with the PREM-207 or 20018

AUT-1-SENSOR AUTEL MX-SENSOR



Programmable Universal TPMS Sensor • Combines 315 MHz and 433 MHz frequencies into one TPMS sensor • Interchangeable Stem

17-43041 SMART SENSOR ONE



Smart Sensor One Multi-frequency Programmable Universal TPMS Sensor • Rubber Stem • Covers both 315 MHz and 433 MHz • Interchangeable Stem

591134 ALLIGATOR SENS.IT RS+



Dual Frequency TPMS Sensor with Rubber Snap-In Valve • 99.7% coverage and 100% OE mimic functionality • Frequency Range: 315 MHz & 433 MHz

PREM-TESLA U-PRO HYBRID BLE



U-Pro Hybrid BLE Tesla Replacement TPMS Sensor with Black Clamp-In Valve • Pre-programmed for Tesla Model 3, S, X & Y

REPLACEMENT RUBBER VALVES



PREM-207



PREM-215A



AUT-MXSENSRVK

| Code | Description | Valve Base |
|----------------------|--|------------|
| PREM-207 | Replacement Snap-In Valve for Schrader GM, Ford and Programmable Sensors | |
| PREM-208 | Replacement Clip Design Snap-In Valve for the 5775 Dodge Dart Sensor and Redi-Sensor | |
| PREM-210 | Replacement Snap-In Valve for certain Schrader sensors on Ford, GM, and Subaru Vehicles between 2015-2024 | |
| PREM-211 | Replacement Snap-In Valve for Dodge Ram Models • Base has 4 square sides | |
| PREM-215A | Replacement Snap-In Valve for Smart Sensor | |
| 20018 | TPMS Snap-in Service Kit (Ford/GM) • Interchangeable with EZ-Sensor or U-Pro | |
| A-20008 | TPMS Snap-in Service Kit (Ford/GM) • Interchangeable With EZ-Sensor or U-Pro | |
| AUT-MXSENSRVK | MX-SENSOR-only Rubber Valve Kit • Rubber Interchangeable Press-In Valve Stems • Exclusive Press Release Interchangeable Valve Stems • 4 Pack | |
| VS-65 | Replacement Stem for 2014 Dodge Ram • Fits Schrader Sensor 28984 or Dill Sensor 6815 • Square Brass Stem • All 4 sides at Base | |



SCAN QR CODE TO VIEW FULL SECTION

TPMS SCAN TOOLS



PREM-H47

Prema H47 with Integrated OBDII Module • Free Lifetime Updates • Programs U-Pro Sensors • Activates or reads all other TPMS Sensors




AUT-TS508WF

Autel MaxiTPMS TS508WF with Wi-Fi updates • Features Quick and Advance modes of TPMS service and a TPMS status screen • Can read/activate/relearn all known sensors, has 4 methods of MX-Sensor programming, and performs placard value resets on supported vehicles • Displays on-tool MX-Sensor relearn procedures including OBDII and can do key fob signal tests



WRT600PRO

Bartec Tech600PRO TPMS tool with VCI and 30 RITE-SENSORS • Wireless capabilities • 2.8" High Resolution Colour Display • 2.4 GHz WiFi • Qi Charging



AUT-ITS600

Autel ITS600 • Wireless, touchscreen Android-based tablet • Complete TPMS diagnostics and service functions • 5.5" colour display and Bluetooth VCI • VINscan for rapid vehicle identification, four MX-Sensor programming options, OBDII relearn functionality and onscreen relearn instructions for all vehicles • Can activate, read and relearn all known sensors, perform TPMS system diagnostics and four common maintenance services • Provides DOT number scan, tire expiration notice, and access to recall lookup



AVT41

Alligator TPMS Wireless Programming and Diagnostic Tool makes programming Sens.it RS+ TPMS Sensors easy • Supports your workflow with wireless activation, cloning, programming and ECU resets



AUT-TS900

3-in-1 TPMS, Advanced Diagnostics, & Service Tablet • Includes all features & functions of the ITS600 • Android 11 OS • Perform Bidirectional Active Tests & Special Functions • Extensive Service Menu with direct access to over 40 maintenance tasks • Generate Detailed Pre- & Post-Scan Reports • Wi-Fi sharing and printing

TPMS MECHANICAL TOOLS



17-173

TPMS Torque Valve Core Tool • Maintenance-free precision ratchet mechanism • Safely tightens valve cores to specifications mandated for most TPMS sensor valves



5415

TPMS Snap-In T-10 Torque Driver • Pre-set to 12 in-lbs • Replaceable bit



17-168

TPMS Mechanical Tool Bundle • Complete with Torque Wrench, Core Tool, Grommet Tool, and many more

TPMS SERVICE KITS



PREM-CORE

Nickel Valve Cores • 100 per box



17-492L-1

Long Black Plastic TPMS Caps with seal • 100 per box



591300

TPMS Service Pack Kit • Includes 68 Service Packs and 16 Rubber Snap-In Valves





TESLA BLE SENSOR




Hamaton U-Pro Hybrid BLE

- Cost-effective Aftermarket Bluetooth Low Energy TPMS Sensors for Teslas
- Direct replacement of OE sensor
- Pre-programmed for Tesla model 3, S, X and Y
- No programming required - install and drive
- Valve colour complements the alloy wheel


Coverage:

- Tesla Model 3 (Oct 2020+)
- Tesla Model S (Jun 2021+)
- Tesla Model X (Oct 2021+)
- Tesla Model Y (Oct 2020+)



Order Number: **PREM-TESLA**

YOUR PREMA BRANDED SENSOR SOLUTION

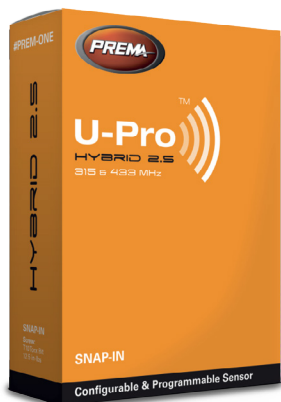

PREMA U-Pro Hybrid 2.5

- 99% of direct TPMS-enabled vehicle coverage
- Configurable: configure in 1-3 seconds, as protocols covering a high percentage of vehicles are stored on the sensor
- Programmable: New programmable protocols added as they become available, future-proofing stock
- Dual Frequency 315 & 433MHz
- Compatible with 25 + ATEQ manufactured TPMS tools
- Fastest configurable/programmable sensor in the market
- Program sensors through the tire with a tool while fully inflated – saving time
- 115 PSI Valve Rated
- 3-Year Sensor Warranty

Order Number: **PREM-ONE**

THE 1ST PROGRAM-BY-PHONE SENSOR



PREMA U-Pro Hybrid NFC

Built-in NFC (Near-Field Communication) technology:

- Facilitates rapid programming
- Eliminates interference with other sensors
- Any brand tool can perform relearn once programmed

Download the Free App




It also includes the same great features as the U-Pro Hybrid 2.5

Order Number: **PREM-NFC**

TUBELESS SNAP-IN TYPE VALVES - .453 and .625 Rim Holes

For use up to 65 PSI Cold Inflation Pressure maximum

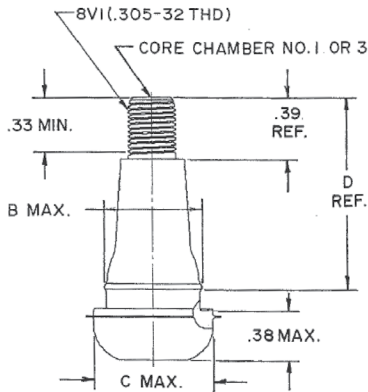

NOTES:

1. Recommended maximum rim thickness at valve hole for the snap-in type valves listed in table is .156". For usage beyond this limit consult valve manufacturer.
2. Valve Core: TR C1 (short core only for TR 412 valve). Valve cap TR VC2, VC3
3. In the case of applications above 210 km/h (130 mph) it is recommended to use a clamp-in valve instead of a snap-in valve.



| Code | Description | TR # | Rim Hole | B Max | C Max | D Ref |
|--------------------|-----------------------------------|------|----------|-------|-------|-------|
| AA-412-10 | Straight • Rubber | 412 | .453" | .66" | .78" | .88" |
| A-412B | 90° Bend • Brass | 412B | .453" | .66" | .78" | .88" |
| A-412C | Straight • Rubber • Chrome Sleeve | 412 | .453" | .66" | .78" | .88" |
| AA-413-50 | Straight • Rubber | 413 | .453" | .66" | .78" | 1.25" |
| EHA-413-100 | Straight • Rubber | 413 | .453" | .66" | .78" | 1.25" |
| A-413C | Straight • Rubber • Chrome Sleeve | 413 | .453" | .66" | .78" | 1.25" |
| AA-414-50 | Straight • Rubber | 414 | .453" | .66" | .78" | 1.5" |
| EHA-414-100 | Straight • Rubber | 414 | .453" | .66" | .78" | 1.5" |
| AA-418-50 | Straight • Rubber | 418 | .453" | .66" | .78" | 2" |
| EHA-418-100 | Straight • Rubber | 418 | .453" | .66" | .78" | 2" |
| AA-423-10 | Straight • Rubber | 423 | .453" | .66" | .78" | 2.5" |
| AA-415-10 | Straight • Rubber | 415 | .625" | .66" | 1" | 1.25" |
| AA-425-10 | Straight • Rubber | 425 | .625" | .66" | 1" | 2" |

HIGH PRESSURE SNAP-IN VALVES

Tubeless Snap-In Type Valves for high pressure applications • 600HP/602HP — 80 PSI Cold Inflation Pressure maximum

| Code | Description | TR # | Rim Hole | C Max | D Ref |
|----------------|--------------------------------------|-------|----------|-------|-------|
| A-600HP | Specialty • High Pressure • Straight | 600HP | .453" | .69" | 1.27" |
| A-602HP | Specialty • High Pressure • Straight | 602HP | .453" | .69" | 2" |



SPECIALTY VALVES

| Code | Description | TR # | Rim Hole | Length |
|-----------------|---|-------|----------------|--------|
| A-416 | Clamp-In Tubeless Tire Valve for Passenger, Light Truck and Industrial Rims | 416 | .453" .625" | 1.25" |
| A-523MS | High Performance Chrome Plated Low Profile Tire Valve | 5991B | .453" .625" | 1.15" |
| VS-902K | Ford F-Series Valve for Outer Accuride Steel Wheel • Brass | 416S | .453" | 1.96" |
| VS-962C | Ford F-Series Valve for Outer Accuride Steel Wheel • Brass | N/A | .453" | 2.32" |
| VS-962WZ | Ford F-Series Valve for Outer Accuride Steel Wheel • Nickel | N/A | .453" | 2.32" |



A-416



A-523MS



VS-902K



VS-962C



VS-962WZ

VALVE CAPS

| Code | Description | TR # | Qty |
|------------------|--|------|-----|
| 690 | Dill Anodized Plastic Nitrogen Indicator Cap with Seal | N/A | 100 |
| A-VC8-100 | Black Plastic Valve Cap | VC8 | 100 |



690



A-VC8-100

VALVE CORES

| Code | Description | TR # | Qty |
|----------------------|--|------|-----|
| A-C1-HT-100-N | Standard Valve Core • High Temperature • Nickel Plated | C1 | 100 |
| A-C1-HT-100 | Standard Valve Core • High Temperature • Brass | C1 | 100 |




A-C1-HT-100-N



A-C1-HT-100

VALVE TOOLS



A-605-BH

4-Way Standard Valve Repair Tool • Black Hardened Steel



SRK22985

Valve Core Tool for Standard Bore Valve Cores • Screwdriver Handle



2-296

2-Way Valve Repair Tool • Combination valve core installer • Screws on valve mouth to open core



231940

Green polymer Valve Stem Puller and Installation Tool with built-in Valve Core Remover • Made in Germany of high performance plastic that will not bend or break



FW-70471

1/2" Wire Brush with Plastic Handle



2-308AC

Lever Type Valve Stem Puller • Heavy duty body with no bend • Deep notches for better grabbing of the rim




SCAN QR CODE TO VIEW FULL SECTION

premacanada.ca | 1-800-268-6311 | sales@premacanada.ca | 9

BRASS CLAMP-IN TRUCK VALVES - 570 Series



| Code | Description | TR # | Rim Hole | A |
|------------------|--|--------|----------|-------|
| A-500-10 | Premier Performance Tubeless Truck Valve • Brass | 500 | .625" | 2" |
| A-50023 | Premier Performance Tubeless Truck Valve • Brass • 23° Bend | 500-23 | .625" | 2" |
| A-501-100 | Premier Performance Truck and Bus Tubeless Truck Valve • Brass | 501 | .625" | 1.5" |
| A-571-10 | Premier Performance Tubeless Truck Valve • Brass | 571 | .625" | 3.38" |
| A-572-100 | Premier Performance Tubeless Truck Valve • Brass | 572 | .625" | 3.75" |
| A-573-100 | Premier Performance Tubeless Truck Valve • Brass | 573 | .625" | 4.38" |
| A-574-10 | Premier Performance Tubeless Truck Valve • Brass | 574 | .625" | 5" |
| A-575-10 | Premier Performance Tubeless Truck Valve • Brass | 575 | .625" | 2" |



NOTES:

1. Valve Core: TR C1
2. Valve Cap: TR VC2, VC3
3. Recommended Nut Torque at Installation: 35-55 in-lbs

ALCOA O-RING VALVES & GROMMET VALVES

| Code | Description | TR # | Rim Hole | Length |
|------------------|--|------|---------------|---------------|
| A-542-10 | Premier Performance Alcoa O-Ring Valve | 542 | .382" / .394" | 1.26" |
| A-543D-10 | Premier Performance Alcoa O-Ring Valve • 60° Bend | 543D | .382" / .394" | 2.31" / 1.38" |
| A-543E-10 | Premier Performance Alcoa O-Ring Valve • 75° Bend | 543E | .382" / .394" | 2.31" / 1.38" |
| A-544D-10 | Premier Performance Alcoa O-Ring Valve • 60° Bend | 544D | .382" / .394" | 2.86" / 1.94" |
| A-545D-10 | Premier Performance Alcoa O-Ring Valve • 60° Bend | 545D | .382" / .394" | 3.5" / 2.6" |
| A-545E-10 | Premier Performance Alcoa O-Ring Valve • 75° Bend | 545E | .382" / .394" | .98" / 2.6" |
| A-552-10 | Premier Performance Alcoa Grommet Valve | 552 | .381" | 1.259" |
| A-554D-10 | Premier Performance Alcoa Grommet Valve • 60° Bend | 554D | .381" | .98" / 1.94" |
| A-555D-10 | Premier Performance Alcoa Grommet Valve • 60° Bend | 555D | .381" | .98" / 2.6" |



542



543D



543E



544D



545D



545E



552



554D



555D



METAL VALVE CAPS AND CAP/CORE TOOLS



33-0709

Alligator V2B Metal Double Sealing Screw On Valve Cap • Doesn't need to be removed to check air pressure or add air — gauging and inflating is done directly through the valve cap



A-VC3-100



Premier Performance Metal Dome Shaped Valve Cap • TR # VC-3 • Qty 100



VALVECAPR-PRO

ValveCapper® Pro 3-in-1 Valve Cap/Core Removal Tool • 11-3/4" • Holds onto caps for removing and replacing • Holds on to core for easy removal and installation

SWIVEL, TURRET, PLANETARY GEAR & STRAIGHT VALVES

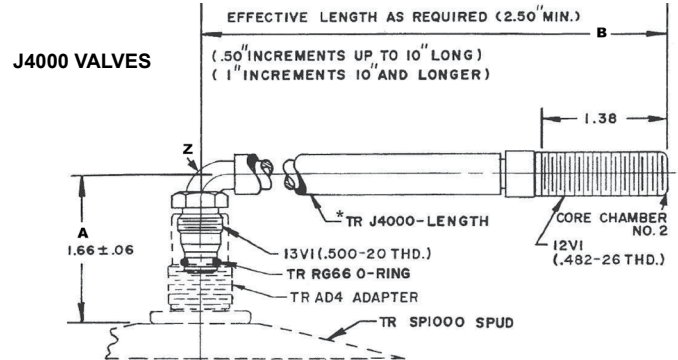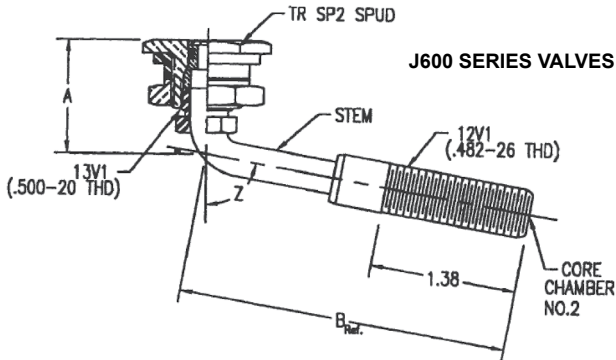

EXJ-653



EXJ-650



EXJ-4004



EXJ-4006



EXJ-690



EXJ-691



EXJ-697



EX-3150/1

| Code | Description | TR # | Rim Hole | A | B | Z /Angle |
|-----------------|------------------------------|--------|----------|--------------|-------|----------|
| EXJ-653 | Dill Large Bore Swivel Valve | J-653 | .812" | 1.08" | 2.5" | 80° |
| EXJ-650 | Dill Large Bore Swivel Valve | J-650 | .812" | 1.08" | 3.12" | 80° |
| EXJ-4004 | Dill Large Bore Swivel Valve | J-4000 | .812" | 1.66" ± .06" | 4" | 90° |
| EXJ-4006 | Dill Large Bore Swivel Valve | J-4000 | .812" | 1.66" ± .06" | 6" | 90° |

NOTES:

1. Valve Core: TR C2
2. Valve Cap: TR VC6, VC7, VC10
3. Recommended Torque at Installation: 70-80 in-lbs

| Code | Description | TR # | Rim Hole | Length |
|------------------|--|-----------|----------|--------|
| EXJ-690B | Dill Large Bore Turret Valve | TRJ-690 | .812" | 4.96" |
| J-691-USA | Dill Large Bore Planetary Gear Wheel Valve | TRJ-691 | .812" | 3.125" |
| EXJ-697 | Dill Large Bore Turret Valve • 25° Bend | - | .812" | 5-1/2" |
| EX-3150/1 | Dill Large Bore Straight Valve Stem | TRJ-670-2 | .812" | 1.4" |



SCAN QR CODE TO VIEW FULL SECTION

TUBELESS LARGE BORE AIR LIQUID VALVES



A-618A



EX-670



A-621A



A-623A



A-936B



VH936B



A-618RSI

| Code | Description | TR # | Rim Hole | Length |
|-----------------|---|--------|----------------|--------|
| A-618A | Large Bore Air Liquid Valve • Clamp-In | TR618A | .625" | 1-7/8" |
| EX-670 | Large Bore Air Liquid Valve • Clamp-In | TR618A | .625" | 1-7/8" |
| A-621A | Large Bore Air Liquid Valve • 65° Bend • Clamp-In | TR621A | .625" | 3" |
| A-623A | Large Bore Air Liquid Valve • 65° Bend • Clamp-In | TR623A | .625" | 2-1/4" |
| A-936B | Large Bore Air Liquid Valve • Clamp-In | - | .625" | 9/16" |
| VH936B | Large Bore Air Liquid Valve • Clamp-In | - | .453" .625" | 9/16" |
| A-618RSI | Large Bore Air Liquid Valve • Snap-In | TR618A | .625" | 1-7/8" |

LARGE BORE VALVE ACCESSORIES

| Code | Description | TR # |
|-----------------|---|--------|
| A-65658 | Outside Large Bore to Standard Bore Adapter/Reducer | AD-1 |
| A-AD1 | Inside Large Bore to Standard Bore Adapter/Reducer | AD-1 |
| A-SP2 | Large Bore Tubeless Tire Spud • Rim Hole: .812" | TRSP2 |
| N-1510 | Large Bore Cap Gauge • 0-160 PSI | - |
| A-C2 | Large Bore Valve Core • Short • Brass | TRC-2 |
| A-675 | Large Bore and Standard Bore Valve Core Removal Tool | - |
| EX-1018L | Large Bore Hex Cap Tool with Plastic Handle • 6-1/4" | - |
| EX-1525 | 4-way Large Bore and Air Water Valve Repair Tool | - |
| 310H | Haltec Large Bore Air Water Core Ejector • 1/2" NPT | - |
| A-CH3 | Air Liquid Core Housing • New Style Fast Flow • O-Ring Seal | TRCH-3 |
| EX-670P | Agricultural Rim Hole Plug • Rim Hole: .625" | - |



A-65658



A-AD1



A-SP2



N-1510



A-C2



A-675



EX-1018L



EX-1525



310H



A-CH3



EX-670P



plasteel®

HYBRID-LOCK™
PLASTIC + STEEL BODY

**HARDENED
STEEL CLIP**

**CURVED
APPEARANCE**

ALUMI-FLAKE™
METALLIC MATERIAL

**PLASTIC
FOR SOFTNESS**

**STEEL
FOR STRENGTH**



**RECYCLABLE
MATERIALS**



**EASY
APPLICATION**




**SCRATCHLESS
INSTALLATION**



**TECHNICIAN
APPROVED**

AVAILABLE IN: **MC** **FN** **AW** **IAW** **EN** **T** **P**

PROUDLY MADE IN CANADA



DOMESTIC ADHESIVES

- **MADE IN CANADA**
- Feature nano-coating for corrosion protection
- Features QuikStik® tape from WEGMANN with instant stick and strong bonding; or Ultra-Liner® tape from WEGMANN that delivers results in cold-weather and high performance applications
- Available in strips and rolls
- Available in black

FEATURING:
**Anti-Roll
Back Break
On All 20 lb.
Adhesive Rolls**



WITH OPTIONS
QuikStik® ADHESIVE TAPE **ULTRA
LINER®**



PERFECT STEEL™ ADHESIVES

WITH
QuikStik®
ADHESIVE TAPE



- **IMPORTED FROM WEGMANN CHINA**
- Manufactured in our own OEM factory
- Features aftermarket standard powder coated segments for corrosion resistance
- Features QuikStik® tape from WEGMANN with instant stick and strong bonding
- Available in strips and rolls
- Available in black
- Unlike other imports, PERFECT STEEL™ is proven!

| SKU | Description |
|-------------------------|---|
| 200576FE | Steel QuikStik / .25 oz. / 3.00 oz. Strips / 48 per |
| 200576FEBLK | Lead QuikStik Black / .25 oz. / Same as above |
| 200576FER | Steel QuikStik / .25 oz. / 11 lb. Roll |
| 200576FERBLK NEW | Steel QuikStik Black / .25 oz. / 11 lb. Roll |
| 300224FE | Steel QuikStik / .50 oz. / 4.00 oz. Strips / 28 per |
| 300224FEBLK | Lead QuikStik Black / .50 oz. / Same as above |
| 300224FER NEW | Steel QuikStik / .50 oz. / 11 lb. Roll |
| 300224FERBLK NEW | Steel QuikStik Black / .50 oz. / 11 lb. Roll |

CLIP-ON WHEEL WEIGHTS

Prema Canada provides a wide selection of Clip-on Wheel Weights for most OEM vehicle applications, as well as after market wheels. Choose from Zinc, Plasteel® or Steel options to suit your needs.

Zinc


- Zinc appears in catalogue with a ZN designation
- Manufactured by molding
- 7.2 g – cm density
- Smallest physical size
- Used as original equipment on many vehicles
- Easier to install and remove than steel
- Zinc will not rust
- High quality coating

Plasteel®

- Plasteel appears in catalogue with a PS designation
- Stamped Construction
- 7.8 g – cm density
- Largest physical size
- Used as original equipment on some vehicles
- Easier to install than standard steel wheel weights
- Encased in a plastic shell to prevent corrosion

Steel

- Steel appears in catalogue with an FE designation
- Stamped Construction
- 7.8 g – cm density
- Larger size
- Used as original equipment on some vehicles
- May damage wheels during installation
- Coated to prevent corrosion



It is essential to refer to application charts or rim gauges to select the correct style of passenger wheel weight to fit your needs,

| Clip Type | Applications | Zinc Codes | Plasteel® Codes | Steel Codes |
|------------|---|------------------------------|--------------------------|--------------------------|
| P | Made for steel wheels and made to fit under hub caps | PZN-025 – PZN-300 | PPS025 – PPS200 | PFE025 – PFE300 |
| MC | Used on most North American vehicles with alloy wheels | MCZN-025 – MCZN-300 | MCPS025 – MCPS300 | MCFE025 – MCFE300 |
| IAW | Used on some European and some Asian vehicles with alloy wheels | IAWZN-005 – IAWZN-060 | IAWPS05 – IAWPS60 | IAWFE05 – IAWFE60 |
| FN | Used on most Japanese vehicles with alloy wheels | FNZN-005 – FNZN-060 | FNPS05 – FNPS60 | FNFE05 – FNFE60 |
| EN | Used on Mercedes, Audi and Volkswagen. Also used on many aftermarket alloy wheels with thin rim flanges | ENZN-005 – ENZN-060 | ENPS05 – ENPS60 | Unavailable |
| T | Used on some light trucks and SUVs with alloy or steel wheels | TZN-025 – TZN-300 | TPS025 – TPS300 | TFE025 – TFE300 |
| AW | Used on most domestic vehicles prior to 1995 with alloy wheels | AWZN-025 – AWZN-300 | AWPS025 – AWPS300 | AWFE025 – AWFE300 |



STEEL ADHESIVE WHEEL WEIGHTS

Coated, lead-free

1/4 oz Weights

| | Code | Brand | Segments | Coating | Strip Weight | Strips per Box | Segments per Box |
|---------------|--------------------|---------|----------|---------|--------------|----------------|------------------|
| STRIPS | 200576FE | Perfect | 1/4 oz | Grey | 3 oz | 48 | 576 |
| | 200576FEBLK | | | Black | 3 oz | 48 | 576 |
| | SADHS25C | Fortune | 1/4 oz | Grey | 2.5 oz | 65 | 650 |
| | SADHS25BC | | | Black | 2.5 oz | 65 | 650 |
| | EC0025GR | | | Grey | 3 oz | 48 | 576 |
| | EC0025BK | | | Black | 3 oz | 48 | 576 |




200576FE



200576FEBLK

| | Code | Brand | Segments | Coating | Roll Weight | Segments per Roll |
|--------------|---------------------|---------|----------|---------|-------------|-------------------|
| ROLLS | 200576FER | Perfect | 1/4 oz | Grey | 11 lbs | 704 |
| | 200576FERBLK | | | Black | 11 lbs | 704 |
| | SADHR25C | Fortune | 1/4 oz | Grey | 11 lbs | 704 |
| | SADHR25BC | | | Black | 11 lbs | 704 |
| | ECOR025GR | | | Grey | 11 lbs | 715 |
| | ECOR025BK | | | Black | 11 lbs | 715 |

200576FER

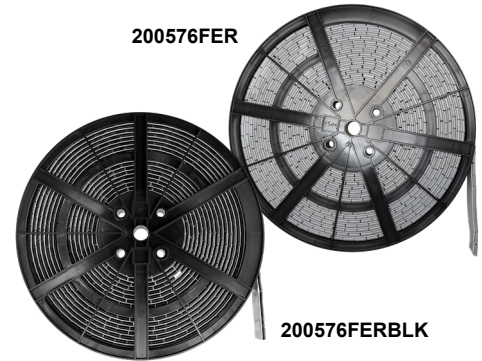

200576FERBLK

1/2 oz Weights

| | Code | Brand | Segments | Coating | Strip Weight | Strips per Box | Segments per Box |
|---------------|--------------------|---------|----------|---------|--------------|----------------|------------------|
| STRIPS | 300224FE | Perfect | 1/2 oz | Grey | 4 oz | 28 | 224 |
| | 300224FEBLK | | | Black | 4 oz | 28 | 224 |
| | SADHS50C | Fortune | 1/2 oz | Grey | 4 oz | 40 | 320 |
| | SADHS50BC | | | Black | 4 oz | 40 | 320 |
| | EC0050GR | | | Grey | 3 oz | 48 | 288 |
| | EC0050BK | | | Black | 3 oz | 48 | 288 |



300224FE



300224FEBLK

| | Code | Brand | Segments | Coating | Roll Weight | Segments per Roll |
|--------------|---------------------|---------|----------|---------|-------------|-------------------|
| ROLLS | 300224FER | Perfect | 1/2 oz | Grey | 11 lbs | 352 |
| | 300224FERBLK | | | Black | 11 lbs | 352 |
| | SADHR50C | Fortune | 1/2 oz | Grey | 9 lbs | 300 |
| | SADHR50BC | | | Black | 9 lbs | 300 |
| | ECOR050GR | | | Grey | 9 lbs | 300 |
| | ECOR050BK | | | Black | 9 lbs | 300 |

300224FER



300224FERBLK



SCAN QR CODE TO VIEW FULL SECTION

STEEL ADHESIVE WHEEL WEIGHTS cont.

Coated, lead-free

1 oz Weights

| | Code | Brand | Segments | Coating | Strip Weight | Strips per Box | Segments per Box |
|---------------|-------------------|---------|----------|---------|--------------|----------------|------------------|
| STRIPS | SADHS100C | Fortune | 1 oz | Grey | 4 oz | 18 | 72 |
| | SADHS100BC | | | Black | 4 oz | 18 | 72 |
| | ECO100GR | | | Grey | 6 oz | 24 | 144 |
| | ECO100BK | | | Black | 6 oz | 24 | 144 |




ECO100GR



ECO100BK

| | Code | Brand | Segments | Coating | Roll Weight | Segments per Roll |
|--------------|------------------|---------|----------|---------|-------------|-------------------|
| ROLLS | ECOR100GR | Fortune | 1 oz | Grey | 10 lbs | 161 |
| | ECOR100BK | | | Black | 10 lbs | 161 |

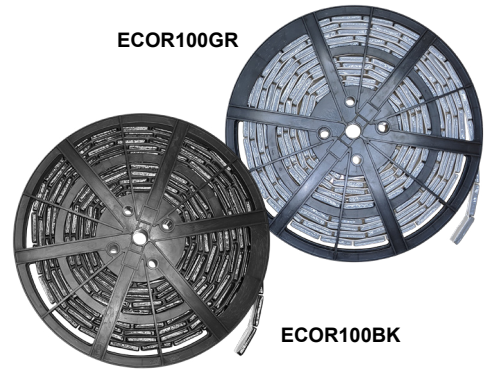

ECOR100GR

ECOR100BK

WHEEL WEIGHT TOOLS



25K

Wheel Weight Tool • Designed to install and remove clip-on wheel weights for passenger cars and light trucks • Plastic-coated handle provides a better grip



50K

Premium Clip-On Wheel Weight Hammer with "Clip Claw" Pliers



75K

Alloy Hammer • Replaceable soft acetate hammer face • Wooden handle • Rear mounted (replaceable) hardened steel "Clip Claw" horn



44011

StickPro Wheel Cleaning Spray • 22 oz bottle • Made for removing residue from adhesive wheel weights



2-RCT

Adhesive Wheel Weight Removal Tool • Chisel shaped end • Gentle treatment of aluminum and alloy wheels • Removes stick-on weights, decals, gaskets etc



IR-324

Adhesive Remover Air Tool • 3,700 RPM • 4" Pad • Includes 12 Eraser Pads • Designed to remove pinstripe tape, double-sided tape, adhesive and molding



IR-324-700-6

6 Eraser Wheel Pads for the Ingersoll Rand IR-324 Adhesive Removal Air Tool



EMZ45031

Emzone Citrus Degreaser • Heavy-duty multi-purpose degreaser formulated to cut and remove grease, dirt, grime, and oil from most surfaces • 390 g



BALANCING COMPOUNDS



Counteract Balancing Beads are the economical way to balance the vehicle wheel assembly for the lifetime of the tire. Made of coated glass spheres, our balancing beads will not cause damage to the inner liner of the tire, they won't clump, regardless of excess moisture and are TPMS compatible.



| Code | Description | Weight per Bag | Bags per Case |
|----------------|----------------------------|----------------|---------------|
| CAB01 | Counteract Balancing Beads | 1 oz | 80 |
| CAB02 | | 2 oz | 64 |
| CAB03 | | 3 oz | 48 |
| CAB04 | | 4 oz | 40 |
| CAB05 | | 5 oz | 38 |
| CAB06 | | 6 oz | 32 |
| CAB08 | | 8 oz | 26 |
| CAB10 | | 10 oz | 20 |
| CAB12 | | 12 oz | 18 |
| CAB14 | | 14 oz | 16 |
| CAB16 | | 16 oz | 14 |
| ECOXL03 | Eco XL Balancing Beads | 3 oz | 96 |
| ECOXL04 | | 4 oz | 92 |
| ECOXL06 | | 6 oz | 64 |
| ECOXL08 | | 8 oz | 52 |
| ECOXL10 | | 10 oz | 40 |
| ECOXL12 | | 12 oz | 36 |
| ECOXL14 | | 14 oz | 32 |
| ECOXL16 | | 16 oz | 28 |

| Code | Description | Weight per Bag | Bags per Pail |
|----------------|-------------------------|----------------|---------------|
| LFP-100 | Magnum+ Balancing Beads | 3 oz | 24 |
| LFP-150 | | 4.5 oz | 24 |
| LFP-200 | | 6.5 oz | 24 |
| MFP-250 | | 8.5 oz | 22 |
| MFP-300 | | 10.5 oz | 18 |
| MFP-400 | | 13 oz | 14 |
| MFP-500 | | 16 oz | 12 |



LFP-150



MFP-300



MBP8KG

| Code | Description | Weight per Pail |
|---------------|-----------------------------------|-----------------|
| MBP8KG | Magnum+ Beads (loose, with scoop) | 17.6 lbs |



PREMA PROFESSIONAL TIRE REPAIR START-UP KIT

PCAB-STARTUP

Each cabinet includes a repair manual, decals, and one (1) of each of the following items:

| Code | Description |
|-------------------|---|
| PCAB-1 | Wall-Mounted Storage Cabinet with Keyed Lock. Dimensions: 20" W x 29-1/2" L x 7" D |
| IR-327LS-A | Air Tire Buffer • 7/16" Hex Quick Change • 0.5HP • 3,000 RPM |
| RH100-S | Flared Contour Buffing Wheel With 3/8"-24 Inner Nut • 2" x 3/4" |
| PCC-2 | Carbide Cutter • Length of Carbide: Regular • Injury Diameter 1/4" (6.35 mm) |
| 940 | Wooden handle Skiving Knife with tapered point tip • Blade Length: 4" (101 mm) |
| 2-915 | Spiral Probe and Cement Tool |
| 2-936 | 1/8" x 1-1/2" Plastic Handled Tire Repair Stitcher • Corrugated Wheel |
| 2-933 | Innerliner Tire Scraper |
| PPC-16 | Prema Pre-Buff Cleaner • Spray • 16 oz |
| PFC-8 | Prema Ultra Fast Dry Vulcanizing Cement • Brush top can • 8 oz |
| PLOS-16 | Prema Innerliner Overbuff Sealant • 16 oz |
| SB2088B | Small Handled Cleaning Brush • Brass Bristles |
| PBS-32 | Prema Bead Sealer • Extremely thick / will not drip • 32 oz |
| PC-2 | Prema Combi #2 with Guide Wire • Injury Size 1/4" • Box of 15 |
| 80250 | Markal B Hex Tire Crayon • White • Box of 12 |
| SLP-9211 | 1-7/8" x 3/8" - 24 Threaded Quick Change Adapter with Washer & Nut • Black hardened |
| SLP-9215 | 1/4" Quick Change Adapter • Black hardened |

PCAB-STARTUP

All the items, tools and chemicals required to complete industry-standard tire repairs.



* All contents are also available individually

TIRE REPAIR INSERTS & ATV REPAIR KIT



PRI-2

| Code | Description | Length | Qty per Box |
|--------------|--|--------|-------------|
| PRI-1 | Premafill Reinforced Narrow Vulcanizing Insert • Passenger and Light Truck • Thin • Orange | 3-3/4" | 50 |
| PRI-2 | Premafill Reinforced Standard Vulcanizing Insert • Regular • Blue | 3-3/4" | 50 |
| PRI-3 | Premafill Reinforced Vulcanizing Insert • Truck • Blue | 5-1/8" | 40 |
| PRI-4 | Premafill Reinforced Vulcanizing Insert • Earthmover • Blue | 7-1/2" | 25 |




PRI-ATV

Premafill Reinforced Vulcanizing Insert
Emergency ATV Kit
• Includes 1 Chrome T-Handle Cementing Tool, 1 Chrome T-Handle Insert Tool, 50 PRI-1 Inserts, Rubber Cement (4 tubes)
• All items come in a sturdy ABS plastic case



COMBI REPAIRS & STEMS


| Code | Brand | Description | Injury Size | Qty per Box |
|---------------|-------|-------------------------------|-------------|-------------|
| PC-1 | Prema | Combi #1 with guide wire | 1/8" | 40 |
| PC-2 | | Combi #2 with guide wire | 1/4" | 15 |
| PC-3 | | Combi #3 with guide wire | 5/16" | 10 |
| PC-4 | | Combi #4 with guide wire | 3/8" | 10 |
| A-3 | Rema | Minicombi A3 with guide wire | 1/8" | 50 |
| A-6 | | Minicombi A6 with guide wire | 1/4" | 40 |
| B-10 | | Minicombi B10 with guide wire | 3/8" | 20 |
| KX-386 | Kex | Round Combi with guide wire | 1/8" | 24 |
| KX-387 | | | 1/4" | 25 |
| KX-388 | | | 3/8" | 25 |
| PCS-2 | Prema | Stem #2 with guide wire | 1/4" | 20 |
| PCS-3 | | Stem #3 with guide wire | 5/16" | 20 |
| PCS-4 | | Stem #4 with guide wire | 3/8" | 20 |

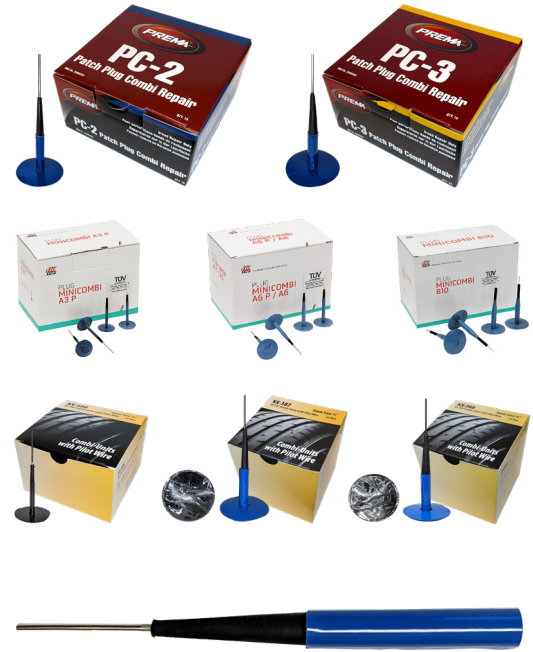

PCS-2

UNIVERSAL TIRE REPAIRS

| Code | Brand | Description | Size | Qty per Box |
|-----------------|--------|---------------------------|----------|-------------|
| PUR-2 | Prema | Universal Round Repair 2 | 2" | 50 |
| PUR-3 | | Universal Round Repair 3 | 3" | 50 |
| PUS-2 | | Universal Square Repair 2 | 2" | 100 |
| PUS-3 | | Universal Square Repair 3 | 1-3/4" | 100 |
| PUS-4 | | Universal Square Repair 4 | 2-1/4" | 50 |
| UP-3 | Rema | Universal Square Repair 3 | 1-1/16" | 100 |
| UP-6 | | Universal Square Repair 6 | 1-11/16" | 50 |
| UP-8 | | Universal Square Repair 8 | 2-3/16" | 50 |
| KX-UP-45 | Kex | Universal Square Repair | 1-1/4" | 30 |
| KX-UP-55 | | | 2-1/8" | 30 |
| PURO-30 | Orange | Universal Round Repair | 1-1/8" | 120 |
| PURO-50 | | | 1-15/16" | 80 |
| PUSO-45 | | Universal Square Repair | 1-11/16" | 80 |
| PUSO-55 | | | 1-1/8" | 80 |

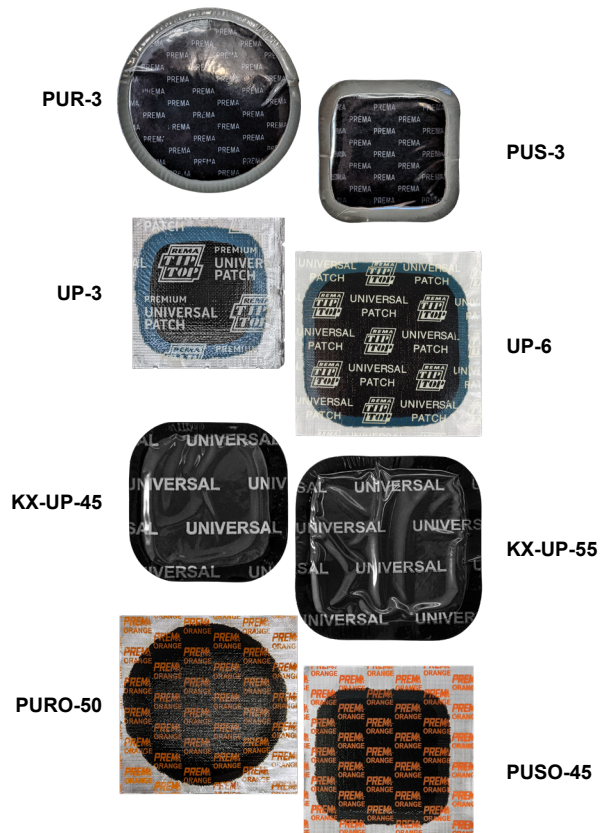

RADIAL TIRE REPAIRS

| Code | Brand | Description | W | L | Ply | Qty per Box |
|----------------|--------|--------------------|--------|--------|-----|-------------|
| PR-109 | Prema | Radial Repair #109 | 2" | 3" | 1 | 20 |
| PR-110 | | Radial Repair #110 | 2-1/4" | 3-1/4" | 1 | 20 |
| PR-112 | | Radial Repair #112 | 3" | 4-1/4" | 1 | 10 |
| PR-114 | | Radial Repair #114 | 3-1/2" | 5-1/4" | 1 | 10 |
| PR-115 | | Radial Repair #115 | 3" | 3-1/4" | 1 | 10 |
| PR-120 | | Radial Repair #120 | 3-3/4" | 5" | 2 | 10 |
| RAD-110 | Rema | Radial Repair #110 | 2-3/4" | 2" | 1 | 20 |
| RAD-115 | | Radial Repair #115 | 3" | 3-1/2" | 1 | 20 |
| RAD-120 | | Radial Repair #120 | 3" | 4-7/8" | 2 | 10 |
| KX-MX10 | Kex | Radial Repair #110 | 2" | 3" | 1 | 20 |
| KX-MX12 | | Radial Repair #112 | 3" | 4" | 1 | 10 |
| KX-MX20 | | Radial Repair #120 | 3" | 5" | 2 | 10 |
| PRO-110 | Orange | Radial Repair #110 | 2" | 2-7/8" | 1 | 20 |
| PRO-112 | | Radial Repair #112 | 2-7/8" | 3-3/8" | 1 | 25 |
| PRO-114 | | Radial Repair #114 | 2-5/8" | 4" | 1 | 10 |
| PRO-120 | | Radial Repair #120 | 3" | 4-3/4" | 2 | 10 |



PR-110



RAD-110



KX-MX12



PRO-112

BIAS TIRE REPAIRS

| Code | Brand | Description | Size | Ply | Qty per Box |
|---------------|-------|-----------------|---------|-----|-------------|
| PB-1 | Prema | Bias Repair #1 | 2-1/4" | 1 | 25 |
| PB-2 | | Bias Repair #2 | 3-14" | 2 | 10 |
| PB-3 | | Bias Repair #3 | 3-3/4" | 2 | 10 |
| PB-4 | | Bias Repair #4 | 4-3/4" | 2 | 10 |
| PB-5 | | Bias Repair #5 | 4-3/4" | 4 | 10 |
| PB-6 | | Bias Repair #6 | 6-1/2" | 4 | 10 |
| PN-0 | Rema | Bias Repair #0 | 1-9/16" | 1 | 50 |
| PN-3 | | Bias Repair #3 | 4" | 2 | 10 |
| PN-4 | | Bias Repair #4 | 5-3/4" | 2 | 10 |
| KX-470 | Kex | Bias-Ply Repair | 3" | 2 | 20 |
| KX-471 | | | 4" | 2 | 10 |
| KX-472 | | | 5" | 3 | 10 |



PB-2

PB-3



PN-0



PN-4



KX-470



KX-471



TIRE REPAIR CHEMICALS

For best practices, match all tire repair patches and chemicals to one brand.

| Brand | Vulcanizing Cement | Pre-Buff Cleaner | Liner Overbuff Sealant |
|-------|---|--|--|
| | Brush top can • Flammable • Nearly indestructible bond between the tire and repair unit • 8 oz | Spray • Flammable • Use with Scraping Tool to dissolve lubricants and contaminants, creating a clean surface prior to innerliner buffing • 16 oz | Brush top can • Flammable • Properly applied repair sealer creates an airtight seal around a finished repair, overbuff areas or porous tire innerliners • 16 oz |
| Prema | PFC-8 | PPC-16 | PLOS-16 |
| Rema | BL-8F | 70F | 76F |
| Kex | KX-511F | KX-491F | KX-508F |



TEMPORARY TIRE REPAIR INSERTS



Kex Fat Brown Posi-Cord String Inserts

| Code | Size | Qty per Box |
|---------------|------|-------------|
| KX-361 | 4" | 50 |
| KX-362 | 8" | 25 |



Kex Narrow Black Posi-Cord String Inserts

| Code | Size | Qty per Box |
|---------------|------|-------------|
| KX-370 | 7" | 50 |



KX-365

Kex Deluxe Temporary Repair Kit
• Includes: T-Handle Injury Probe and Split-End Insertion Tools, 1 Jar of Lubricant and 50 **KX-361** 4" Fat Brown Posi-Cord String Inserts

TIRE REPAIR TOOLS & ACCESSORIES



High Tensile Carbide Cutters

| Code | Injury Size | Adapter Code |
|--------------|-------------|-----------------|
| PCC-2 | 1/4" | SLP-9215 |
| PCC-3 | 5/16" | SLP-9216 |
| PCC-4 | 3/8" | 5196593 |



2-925
Premafill Installation Tool
• Passenger



2-925T
Premafill Installation Tool
• Truck



2-925RT
Pistol Grip Injury Probe and Preparation Combination Tool



Markal B Paintstiks

| Code | Shape | Colour | Qty per Box |
|--------------|-------|--------|-------------|
| 80220 | Round | White | 12 |
| 80221 | Round | Yellow | 12 |
| 80250 | Hex | White | 12 |



RH107
Rubberhog Flared Contour Buffing Wheel • 2-1/2" Dia. • Adapter: **SLP-9212**



942
Wooden Handle Skiving Knife • Flexible rounded tip • 4" Blade




HD351
Heavy Duty Awl • 4-1/2" Blade • Screwdriver handle



SCAN QR CODE TO VIEW FULL SECTION

MOUNT/DEMOUNT TOOLS

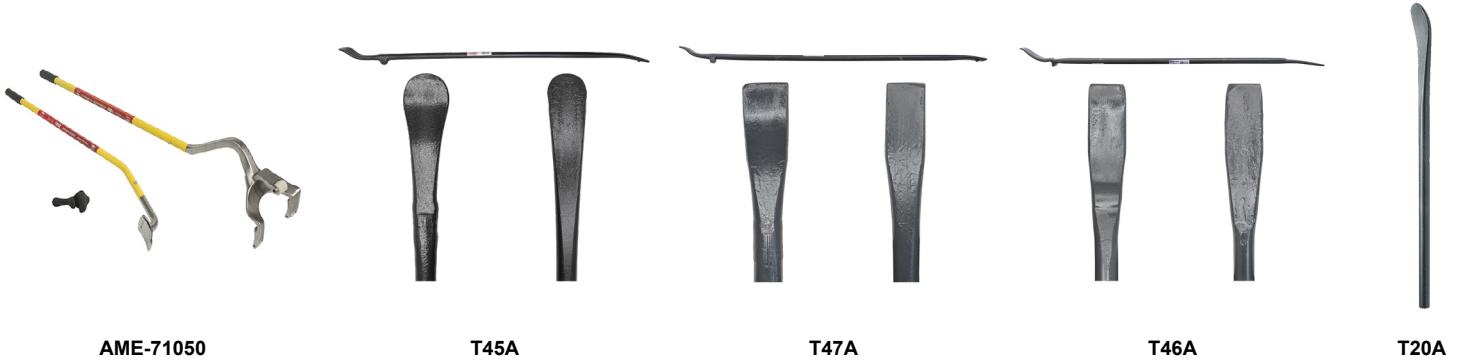


| Code | Description | Length | Diameter | Weight |
|------------------|---|-----------|----------|-----------------|
| AME-71050 | AME Golden Buddy Mount / Demount Truck Tire Removal System for 22.5" and 24.5" Tires / Wheels • Heavy duty steel construction ensures long life • Nylon rollers protect the bead • Tool Set includes: AME-71051 Demount Tool, the AME-71052 Mount Tool, and a Bead Keeper | 39" / 42" | - | 32 lbs / 10 lbs |
| T45A | Standard Tubeless Tire Mount / Demount Iron for Truck, Agricultural and Industrial Tires • Heat-treated for strength • Use in pairs • Tip ends insert easily and will not cut or rip bead or sidewall | 37" | 3/4" | 4.6 lbs |
| T47A | Heavy Duty Straight Tubeless Mount / Demount Iron • Use on Standard and Large Truck Tires, including Industrial, Farm, Buses and Tractors • Heat-treated for strength • Use in pairs • Tip ends insert easily and will not cut or rip bead or sidewall | 52" | 1" | 11 lbs |
| T46A | Straight Mount / Demount Tool • Use on Standard and Large Truck Tires, including Industrial, Farm, Buses and Tractors • Length 36" • Diameter 3/4" • Weight 4.5 lbs | 36" | 3/4" | 4.5 lbs |
| T20A | Curved Tire Mount / Demount Spoon | 30" | 11/16" | 3.1 lbs |



T23A

Truck Lock Ring Remover • Designed to remove most Truck Lock Rings • A must-have for anyone mounting / demounting multi-piece rims • Use in pairs • Length 30" • Diameter 11/16" • Weight 3.1 lbs



GT-12894C

Polymer Coated Steel Truck Bead Keeper • Protects aluminum wheels from being scratched while it locks onto the flange of the wheel and holds the tire bead in place • Eliminates standing on the tire and/or chasing the bead around the wheel

BEAD SEATING AIR BLASTERS

3L, 6L and 10L tanks • The new BEAD BAZOOKA® utilizes an upgraded version of the trigger-operated rapid air release (RAR) valve technology found in the original BEAD BAZOOKA® models • The extra power it delivers allows it to be smaller and lighter while still allowing the user to seat even the most stubborn tire beads • Half the size twice the power • Serviceable/Replaceable 2" RAR valve • Utilizes ultra-compact design • Anti-corrosion interior tank coating



GT-BB3L2



GT-BB6L2



GT-BB10L2



HYDRAULIC BEAD BREAKERS



AME-11010 

AME Combi Bead Breaker • Used on Construction Wheels up to 25" • Works on Single, 2 and 3-Piece Wheels • Tool clamps hydraulically to the wheel and then breaks bead with 11 tons of force • 3.75" Stroke Length • Used with 10,000 PSI (700 BAR) Air/Hydraulic Pump • Weight 34 lbs



AME-11020 

AME Modified Combi Bead Breaker • Most parts interchange with common Bead Breakers • Larger clamp and feet allow the tool to easily clamp onto wheels • Compact design allows the tool to be used on the front or back side of wheel • Weight 38 lbs



AME-11076 

AME Diamond Back Aluminum Bead Breaker with protective carrying case • Lightweight aluminum reduces weight by 40% • Longer feet allow for better fit onto the wheel/rim • Feet fully engage rim flange and push against the tire bead • Weight 31 lbs



AME-11000 

AME OTR Giant Tire Bead Breaker • Only works on 5 piece wheels with bead loosening pockets • Most popular tool for breaking beads on earthmover tires sizes 25"-51" • 4-1/4" stroke ram • 13.8 tons of hydraulic force • Use with any 10,000 PSI (700 BAR) air/hydraulic pump • Weight 33 lbs

HYDRAULIC PUMPS & ACCESSORIES



AME-15920 

5 Quart Air / Hydraulic Pump with Steel Reservoir • Builds 10,000 PSI of pressure to fit the majority of tools on the market • Operates on 80-120 PSI of Inlet Air Pressure • Durable metal air motor assemblies • Weight 23 lbs



AME-16030 

8' Hydraulic Hose Only • 1/4" x 10,000 PSI Working Pressure • Complete with 3/8" NPT Hydraulic Coupler (AME-16060) and Adaptor (AME-16050)

BEAD BREAKING SLIDE BARS, WEDGES & HANDLES

| Code | Description |
|---------------------|--|
| AME-71500 | AME Big Buddy Heavy Duty Slide Bar Bead Breaker with Spring • Easily breaks the most stubborn beads • User fatigue is reduced through spring-action tip, which reduces kick-back • Wedge tip is forced between the tire bead and wheel rim delivering the blow directly to the hammer tip • Heavy duty tool with 1 year warranty • Weight 24 lbs |
| T11E | Hickory Wood Handled Bead Breaking Wedge • Length 30" • Weight 8.5" lbs • Handle T11EH |
| T11ES | Wood Handled Bead Breaking Wedge with Grip Paint Handle • Length 30" • Weight 8-1/2 lbs • Handle T11EH-GRIP |
| T11EH | Replacement Hickory Wood Handle for T11E • Length 30" |
| T11EH-GRIP | Replacement Handle for T11 Series with Grip Paint Handle |
| B3033001GRIP | Replacement Handle for T11 Series with Grip Paint Handle • Length 30" |





TIRE PROFESSIONALS INSIST ON



www.ameintl.net | jdecastro@ameintl.net
352.799.1111 | 226-962-8563

AUTOMOBILE • COMMERCIALE • AGRICOLE • OTR MINIER
AUTOMOTIVE • COMMERCIAL • AG / CONSTRUCTION • OTR / MINING



MOUNTING PASTES & COMPOUNDS



PEP-8

Prema Universal Mounting Paste • Provides excellent lubricity for mounting and demounting tires with minimal rim slip • 7.7 lbs / 3.5 kg

PEP-8N

LOW PROFILE BUCKET



2005

Murphy's Tire and Tube Mounting Compound can be used in its concentrated form or diluted in water (3-4 parts water, 1 part Murphy's) • Amber colour • Non-toxic • Biodegradable • Moderate rust inhibition • Mild citrus odor • Contains no phosphorus, chlorine, zinc or petroleum • Non-flammable • 25 lbs



2180X

Rema Tip Top Concentrated Tire and Tube Mounting Compound for mounting tubeless tires or natural and synthetic tubes • 25 lbs



2490

Rema Super Heavy Duty OTR Tire Mounting / Packing Compound • Will not separate or liquefy • Extra thick for superior bead packing on OTR tires • 25 lbs

LIQUID LUBRICANTS



REMA TIP TOP CONCENTRATED LIQUID TIRE LUBRICANT

Non-toxic • Contains no petroleum products • Lubricants can be applied by brush or spray bottle • Excellent lubrication • Superior "tack" and bead sealing qualities • Reduces tire/rim slippage • Near neutral pH factor

81511

1 Gallon



81515

5 Gallons



1515-25

Premier Performance Tire and Tube Mounting Compound • Great for OTR tire work • Will hold its lubricity in reasonably cold or hot conditions • Temperature Range for use -25C to +35C • Lubricates well in damp conditions • After mounting, the gel will tack up • Rust inhibitor added • This is a non-petroleum based compound • 25 lbs



PREMA LIQUID BLUE TIRE LUBRICANT

Concentrated • Mix Ratio 1:1 to 3:1 • Rust inhibitor added for better rim protection

PTLC-1G

1 Gallon



PTLC-5G

5 Gallons



Prema Liquid Blue Ready to Use Tire Lubricant • Greater lubricity for easier mounting/demounting • Dries tacky to prevent slipping on the rim • Rust inhibitor added to prevent rim corrosion

PTL-1G

1 Gallon



2222-1

Premier Performance Concentrated Tire Mounting Lubricant • Economical • Mix Ratio 1:1 to 3:1 • Rust Inhibitor added for better rim protection • Size: 1 gal



2023

Murphy's Tire and Tube Mounting Compound • Ready-to-use liquid for easy application • Soap-based • Easy to clean up • Non-toxic • Biodegradable • Moderate rust inhibition • Mild citrus odor • Contains no phosphorus, chlorine, zinc or petroleum • Non-flammable • Size: 5 gal

REMA TIP TOP SUPER SLIPPERY BEAD BUTTER

Blue • Concentrated Mounting Liquid • Non-Toxic • No petroleum products • Can be applied by brush or spray bottle



2053B

1 Gallon



2054B

5 Gallons



2055B

55 Gallons



GRAPHITE LUBRICANTS

PREMIER PERFORMANCE BLACK SLIP RIM RUST RETARDANT AND TIRE MOUNTING LUBRICANT

Ideal for aluminum and steel wheels and rims



4444-5
5 lbs



4444-25
25 lbs

PREMIUM BEAD SEALER



PBS-32

Prema Bead Sealer provides a seal between the bead area of the tire and rim • Extremely thick / will not drip • Flammable • Size: 32 oz



777

Premier Performance Bead Sealer is designed to prevent stubborn bead seepage once applied to rim, after it is remounted • Flammable • Size: 32 oz

RIM RELEASE

PREMA LABEL RIB RELEASE

Makes removing tires from rusted rims easier • Frees stubborn beads without special tools or equipment



PREM8153
3.78 L



PREM8253
18.9 L



PREM8353
205 L

TIRE SEALANTS

PREMIER PERFORMANCE TIRE SEALANT

Canadian Made • Holds air pressure • Enhances casing life • Promotes retreadability



1212-1G
1 Gallon




1212-5G
5 Gallons

LUBRICANT BRUSHES & SWABS




TI1506

Angled Lubricant Application Brush • Wooden Handle Length: 7-3/4" • Brush Length: 1-3/4" • Use for application of tire paste • Ergonomically shaped for ease of use • Lightweight at 0.23 lbs



2-964

14-1/2" Cotton Tire Swab



2-965

11-1/2" Cotton Tire Swab



AUTOMATIC TIRE INFLATORS & INFLATOR GAUGES



89XDA

Single Tire Automatic Inflator • Diecast aluminum enclosure • IP66 • Self calibrates every 6 minutes • Factory installed 1/4" x 1/4" MNPT plug in the base of the inflator • Operating range 5-145 PSI • Accuracy +/- 0.3 PSI



MW-60-4WAY

4-Way Automatic Tire Inflator • 145 PSI x 4 Outlets • Measures air pressure with 4 types of measurements: kPa, BAR, PSI and kg/cm2 • Pre-drilled holes for wall mount or mount to a tire cage with the use of an MW Stand Bracket • 110V with 1/4 Air Inlet • Inflate 4 tires from 0-145 PSI in 2 PSI Increments • Dimensions 9" x 10-1/2" x 3-1/2" • Includes (4) 8' Hoses



1991

Eurodair Gauge - Michelin Type • Dial Type Air Line Service Gauge • Use when high visibility, accuracy and durability are important factors • Calibrated 10-170 PSI and 0.7-12 BAR • 2 lb increments • Includes a 5' Hose and a Euro Style Clip-On Chuck



EX-923-10

Single Inflator Gauge for Large Bore applications • Equipped with an Open Chuck • Gauge is calibrated 10-150 PSI in 2 PSI increments • 10' hose



AME-24867

AME Accu-Flate XL Digital Tire Inflator with 6' hose and clip-on chuck • 3-in-1 Function: Inflate, Deflate, and Measure Tire Pressure • Accuracy: ± 2 PSI • Fully Automated • 0-174 PSI • 1/4" NPT female inlet • 2 AAA batteries included • Backlight LCD with 9 second auto off

PENCIL & DUAL FOOT GAUGES

| Code | Description |
|-------------------|---|
| 5900 | Digital Passenger Pressure Gauge • 3.5-100 PSI • LCD Reading • Automatic Shut-Off • Over mold rubberized plastic • CE Approved |
| 5600-PREMA | Prema Mid-Range Pencil Gauge • Passenger • 4-Sided Nylon Bar — 2 sides calibrated 10-75 PSI in 5 PSI units, other 2 sides kPa 70-500 |
| VH663 | Low-Low Pressure Gauge • AG & OTR • 4-Sided Nylon Bar — 2 sides calibrated 1-20 lbs in 1/2 lb units, other 2 sides kPa 10-135 |
| VH664 | Dual Foot Truck Gauge • Short • 4-Sided Nylon Bar — 2 Sides Calibrated 20-120 lbs in 2 lb units, other 2 sides kPa 150-810 |
| 7275R | Dill Dual Foot Long Truck Service Gauge • Great for servicing tilted Inner Dual Valves • 2-Sided Metal Indicator Bar • Calibrated 10-150 lbs in 2 lb units • Recalibration feature |
| 7263 | Dill Straight Push-On 30° Reverse Angle Short Truck Gauge • 4-Sided Nylon Indicator Bar • All 4 sides calibrated 20-120 PSI in 2 PSI increments • Black poly finish • Made in the USA |
| S-929 | Straight Push-On 30° Reverse Angle Short Truck Gauge • 4-Sided Nylon Indicator Bar — 2 sides calibrated 20-120 PSI in 2 PSI increments, other sides 120-820 kPa in 20 kPa increments • Made in the USA • Gauge has a chrome body finish |
| 7285R | Dual Straight Foot Long Service Gauge • Straight Chuck used for Inner Dual Valves • 30° Reverse Angle Chuck for Outside Dual Valves • 2-Sided Metal Indicator Bar • 10-150 lbs in 2 lb units • Recalibratable |
| SG-3 | Recalibrateable Straight Push-On 30° Reverse Angle Long Truck Gauge • External Calibration feature that allows the use of a slot screwdriver to Recalibrate • 2-sided Black Metal Indicator Bar • Calibrated 10-150 PSI in 2 PSI increments on both sides • Black textured powder coat finish |
| VHP668 | Straight Push-On and 30° Reverse Angle Long Truck Service Gauge • 2-Sided Nylon Indicator Bar • Both sides Calibrated 10-150 PSI in 2 PSI increments • Gauge has a black textured power coat finish |




AIR LIQUID & OTR GAUGES

| Code | Description |
|------------------|--|
| VH660 | Air Liquid Tractor Gauge for Air and Liquid Filled Tires • 4-Sided Nylon Bar — 2 sides calibrated 5-50 lbs in 1 lb units, other sides 35-310 kPa |
| EX-1255 | Large Bore Swivel Pressure Gauge • Nylon Indicator Bar • 20-120 PSI |
| EX-1255MC | Large Bore Swivel Pressure Gauge • Metal Indicator Bar • 10-150 PSI • Recalibratable |



EURO CHUCKS

| Code | Description |
|---------------|---|
| 6293-C | Euro Style Chuck and Clip • 1/4" Hose Barb • Firmly locks onto valve while inflating the tire • Open |
| 6293-D | Euro Style Chuck and Clip • 1/4" NPT Female End • Closed |
| 6293-E | Euro Style Chuck and Clip • 1/4" NPT Female End • Open |
| IN-20 | Core Removal and Tire Inflation Chuck reduces inflation time by 50% • Features Clip-On Style Chuck • Made of durable steel, brass, and polycarbonate • 1/4 Female NPT • Ideal for nitrogen purging/inflation • Retractable core housing allows safe removal/replacement of valve core |

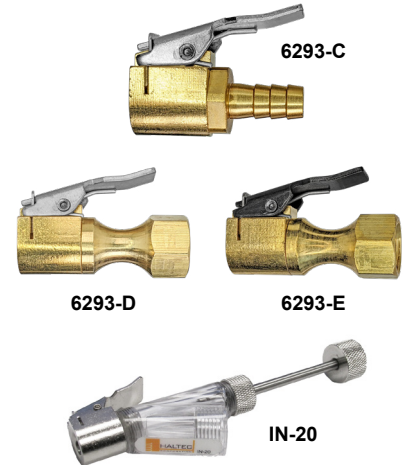

DUAL FOOT & LARGE BORE CHUCKS

| Code | Description |
|------------------|--|
| 6175 | Dual Foot Straight On and 30° Reverse Angle Lock On Air Chuck • For inner dual wheel hard-to-reach valves on tractor, dual wheel truck and bus tires • Black poly finish • Made in the USA • 7" Length • Closed |
| VHP698 | Straight On and 30° Reverse Angle Dual Foot Lock-On Air Chuck • For inner dual wheel hard-to-reach valves on tractor, dual wheel truck and bus tires • Pushes or pulls on tire valve • Length 6" • 1/4" Female NPT • Closed end for use on air lines • Black finish |
| VHP698L | Straight On and 30° Reverse Angle Dual Foot Lock-On Air Chuck • For inner dual wheel hard-to-reach valves on tractor, dual wheel truck and bus tires • Pushes or pulls on tire valve • Length 14" • 1/4" Female NPT • Closed end for use on air lines • Black finish |
| EX-4660-A | Large Bore Clip-On Air Chuck • Securely locks onto the valve when the clip is pushed forward • 1/4" Female NPT • Closed |



SAFETY INFLATION CAGES



MIC-2

Portable 2 Bar Safety Inflation Cage • Certified for inflating tires up to 130 PSI • Compact and lightweight • Folds down to 7-18" H for easy storage • Meets or exceeds OSHA Standard 29 CFR 1910.177 • Dimensions: 25-3/4" L x 21-1/8" W x 57" H • Maximum Tire Size: 50" OD x 16" W • Weight: 59 lbs



MIC-4

Truck 4 Bar Safety Inflation Cage • Certified for inflating tires up to 130 PSI • Meets or exceeds OSHA Standard 29 CFR 1910.177 • Dimensions: 31-3/4" L x 26-1/4" W x 57-1/2" H • Maximum Tire Size: 47" OD x 19" W • Weight: 147 lbs



TREAD DEPTH GAUGES



| Code | Description |
|-------------|--|
| 5800 | Dill Digital Tread Depth Gauge • Displays in mm, inches, and fractions • The LCD display is in 1/32" increments (makes switching from traditional mechanical gauge simple) • The zero function allows you to zero the gauge at any point, making readings quick and extremely accurate |
| 5123 | Dill Tread Depth Gauge • Range: 0 – 1" in 32nds and 0 - 25 mm in 1 mm increments |
| 5127 | Dill Colour Coded Tread Depth Gauge with Metal Indicator Bar • Shows Red - Yellow - Green • 0 - 32 in 32nd increments |
| 5131 | Haltec OTR T-Bar Tread Depth Gauge • 2 Piece Gauge made up of Slide Tube and Indicator • Calibrated 0 - 6" in 32nd increments and 7 - 152 mm Metric • Tubing spans tread lugs on Off-Road Tires |

TIRE SPREADERS



AME-73100

AME Air Operated Tire Spreader with stand • For passenger / RV / light truck tires • Wide platform for stable work surface • Adjustable light

AME-73200

AME Automatic Tire Spreader • Air lift allows operator to repair without lifting • Heavy gauge steel • Lamp included • Air regulator / lubricator included • Weight 310 lbs

50-RB

Rep Boy Floor Mounted Manual Tire Spreader with rollers and tilt • Portable • Heavy duty steel construction • Repair platform rotates 360° • Spreading claws fit 13" - 20" passenger and light truck tires • Oversized base-plate provides safe and stable workstation

WHEEL DOLLIES & TIRE CARTS



| Code | Description |
|--------------------|--|
| AC-WT1500NT | Hydraulic Wheel Trolley with a handle that facilitates easy turning of large wheels • Wheel Sizes: Min. Ø 39.37" - Max. Ø 94.48" • Wheel Width: Max. 47.24" • Capacity: 1.5 t • Easy handling of the largest wheels in the world • A handle facilitates easy turning of the wheel on the trolley • A simple switch for easy jaw expansion or retraction |
| AC-WTA500 | AC Hydraulic Wheel Trolley for Use on Vans, Trucks and Buses • Adjustable Lifting Arms for Wheel Sizes 10.5" - 51" • 0.5 Ton Capacity • Pedal Operated Pump leaves both hands free • Flexible and ergonomic design for the easy removal of wheels and brake drums • Lifting Arms with Roller Bearings for easy rotation of the wheel into the correct position • Bracket for easy securing of the wheel while transporting • Nylon Castor Wheels |
| GT-G471105 | Winntec Heavy Duty Wheel Dolly • 3 Position Rollers Accommodates Tire / Wheel Assemblies from 6.5" - 24.5" • 551 lb Lifting Capacity • Heavy-duty industrial bearings • 3 positions for rollers depending on tire size |
| GT-G472270 | Winntec Wheel Assist — Gen 2 • Handles all Passenger Tires including Run-Flats • Easily lift heavy tire/wheel assemblies • Reduces physical strain • Ergonomically Correct • Maintenance-free |
| GT-Y471106 | SAFERGO Truck Wheel Dolly with Shock Absorbing Castors and Hydraulic Lifting Bottle Jack built within the frame • Lifting Capacity 350 lbs • Reduces back strain • Includes Gaither O-LINE-ER® • Collapsible handle frame |
| MTC | Martins Tire Rider Tuff - Tire cart • Toughest tire cart on the market with its 550 lb loading capacity • Carry 8 tire/ wheel assemblies of up to 35" OD • 2-year warranty + lifetime warranty on spring mechanism • Rubber wheels are solid and flat free |



PASSENGER & LIGHT TRUCK STUDS



| Code | Brand | Description |
|--------------|-----------|--------------------------------------|
| TS-11 | Road Grip | Standard #11 Steel Jacket Tire Studs |
| TS-12 | Road Grip | Standard #12 Steel Jacket Tire Studs |
| TS-13 | Road Grip | Standard #13 Steel Jacket Tire Studs |
| TS-15 | Road Grip | Standard #15 Steel Jacket Tire Studs |
| TS-16 | Road Grip | Standard #16 Steel Jacket Tire Studs |

| Code | Brand | Description |
|-----------------|-----------|---|
| 11-ALU-9 | Road Grip | Standard #11 Aluminum Jacket Tire Studs |
| 12-ALU-9 | Road Grip | Standard #12 Aluminum Jacket Tire Studs |
| 13-ALU-9 | Road Grip | Standard #13 Aluminum Jacket Tire Studs |
| 15-ALU-9 | Road Grip | Standard #15 Aluminum Jacket Tire Studs |
| 16-ALU-9 | Road Grip | Standard #16 Aluminum Jacket Tire Studs |

TIRE STUD SYSTEMS & GUNS



BW-K500A

Tire Studding System • Includes the Studding Stand # BW-K5A, Motorized Feeder # BW-FP9A and Stud Gun # TSIT-9



TSIT-9

Bruno Wessel 9 mm Tire Stud Installation Tool • The standard of the industry • Automatic, lightweight, easy to use and maintain • Handles TSMI #11-17 stud sizes

CALCIUM PUMPS



AME-15090

1" Graco Calcium Pump with Kit • 50 Gallon (189 Liter) per minute capacity • 1:1 Ratio Double Diaphragm Pump



AME-15100

1" Yamada Calcium Pump with Kit • High quality unit with 40 Gallon (152 L) per minute capacity • 1:1 Ratio Double Diaphragm Pump • Weight: 38 lbs (17.2 kg) • Features: Two 10' Rubber Hoses, Metal Shut-Off Valve, and Ejector Gun

TIRE REGROOVERS & BLADES



PCU-115


115 V Prema Tire Regroover • 4 Level Temperature Switch • Approved German TUV Certification with CE Conformity • Comes without Plug End • Compatible with Cutting Blades from 3 mm to 28 mm




GR3/R-3



GR3/W-4



GR3/R-1 - GR3/R-5



GR3/W-1 - GR3/W-6

RILLFIT TIRE REGROOVER BLADES

Dimensions (mm)

| Code | Shape | A | B | C | D | Qty |
|----------------|--------|----|----|----|----|-----|
| GR3/R-2 | Round | 5 | 7 | 8 | 21 | 20 |
| GR3/R-3 | Round | 6 | 10 | 15 | 21 | 20 |
| GR3/R-4 | Round | 8 | 12 | 16 | 23 | 20 |
| GR3/R-5 | Round | 10 | 12 | 18 | 25 | 20 |
| GR3/W-1 | Angled | 3 | 7 | 5 | 21 | 20 |
| GR3/W-2 | Angled | 5 | 7 | 6 | 21 | 20 |
| GR3/W-3 | Angled | 7 | 10 | 10 | 22 | 20 |
| GR3/W-4 | Angled | 9 | 12 | 13 | 24 | 20 |
| GR3/W-5 | Angled | 11 | 12 | 15 | 23 | 20 |
| GR3/W-6 | Angled | 23 | 12 | 28 | 24 | 10 |



GT-BB3L2 – for ATV, motorcycle, car, and light commercial vehicles

GT-BB6L2 – for motorcycle, car, light truck, and heavy commercial vehicles

GT-BB10L2 – for car, light truck, heavy commercial, and light agricultural vehicles



BEADBAZOOKA®

GT-BB3L2 - GT-BB6L2 - GT-BB10L2

- Half the size twice the power
- Serviceable/Replaceable 2" RAR valve
- Utilizes ultra-compact design
- Anti-corrosion interior tank coating

GT-G432021

- Low Profile
- 20 Ton capacity
- Chrome main ram
- Includes air filter and air regulator
- Min 5.75"
- Max 10.31"



20T LOW PRO AIR/HYD. BOTTLE JACK

GT-GB38L

- The tank is CE/ASME certified
- Lightweight aluminum tank
- RAR valve with trigger release
- Internal proprietary coating protects against rust



38L RAR BEAD BOOSTER

GT-432020

- 20 Ton capacity
- Chrome main ram
- Includes air filter and air regulator
- Min 10.00"
- Max 18.50"



20T AIR/HYD. MANUAL BOTTLE JACK

GT-G471147HD

- Spring loaded
- Push / Pull release
- 441 lb. capacity



SMART CART

GT-G472270

- Easily lift heavy tire/wheel assemblies
- Reduces physical strain
- Ergonomically Correct
- Maintenance-free
- 132 lb. capacity



WHEEL ASSIST GEN 2

GT-G432024

- 24 Ton Capacity
- Extension screw
- Heavy-duty wheels
- Min 8.46"
- Max 17.36"



24T AIR SERVICE JACK

GT-G471105

- Gaither O-LINE-ER® included
- Heavy-duty industrial bearings
- Adjustable 3 position rollers
- For all wheels from 6.5" – 24.5"
- Accommodates super singles
- 551 lb. capacity



TRUCK WHEEL DOLLY

GT-Y471106

- Lifting capacity 350 lbs.
- Reduces back strain
- Includes Gaither O-LINE-ER®
- Collapsible handle frame



SAFERGO TRUCK TIRE DOLLY

GT-G420303


- Strategically placed pumping pistons
- Complete pumping stroke always utilized
- Professional universal joint release valve
- Precise and safe lowering of jack each time
- Equipped with a handle protector
- Min 5.12"
- Max 19.29"



3T TURBO LIFTER GARAGE JACK



Gaither
PROFESSIONAL EQUIPMENT



IMPACT WRENCHES - 1/2" & 3/4" DRIVE



CP-7748



CP-7748-2



AIR-1431-2



IR-2235QTIMAX



IR-2235TI2MAX



IR-2235TIMAX



IR-231HA-2



IR-W7152-K22



IR-2145QIMAX



IR-261

| Code | Drive | Brand | Description |
|--|-------|-------------------|---|
| CP-7748 | 1/2" | Chicago Pneumatic | Brute Impact Wrench • Max. torque reverse 960 ft-lb • 3 power settings • Lightweight composite housing • Durable twin hammer clutch • 360° swivel air inlet • One-handed forward / reverse (ring system) |
| CP-7748-2 (2" Extended Anvil) | | | |
| AIR-1431-2 (2" Extended Anvil) | | Aircat | Provides 800 ft-lb maximum torque and 1,000 ft-lb of loosening torque • Hard hitting twin hammer mechanism delivers maximum power • Grip is ergonomically designed to perfectly fit the hand, providing unmatched comfort for the user • Cross bolt forward/reverse and power management control • Triple heat treated Ni-Cr-Mo alloy steel hammer mechanism parts and anvil provide ultimate reliability • Grey Pneumatic® Thin Wall Flip Socket (19 mm / 21 mm) • 6 lbs |
| IR-2235QTIMAX (Quiet Technology • 2" Extended Anvil) | | Ingersoll Rand | Lightweight Balanced Air Impact Wrench • 930 ft-lb Nut-Busting Torque • 8,500 RPM • Titanium Hammer Case • Impact and Chemical Resistant Housing • Optimized for the vehicle repair industry, heavy trucks, tire lanes, fleet maintenance, body shops, general industrial use • 2 Year Warranty • 4.6 lbs |
| IR-2235TI2MAX | | | |
| IR-2235TIMAX (2" Extended Anvil) | | | |
| IR-231HA-2 (2" Extended Anvil) | | | |
| IR-W7152-K22 (Kit) | | | 20V High-torque Cordless Impact Wrench Kit with Standard Anvil • Kit includes 2 - 5.0Ah IR-BL2022 Batteries , Tool Charger and Carry Bag • Powerful Brushless Motor delivers durability and efficiency • Variable Speed Trigger and 4 IQ Power Control System Settings |
| IR-2145QIMAX | 3/4" | Ingersoll Rand | Quiet Heavy Duty Impact Wrench • 1,350 ft-lb Maximum Reverse Torque • Built to last in rugged conditions • Provides access in tight spaces • Only 7.4 lbs |
| IR-261 | | | Air Impact Wrench • Super Duty • 1,100 ft-lb Torque • Friction Ring Retainer • Pistol • 12.4 lbs |



IMPACT WRENCHES - 1" DRIVE



| Code | Drive | Brand | Description |
|--|-------|-------------------|---|
| CP-7782-6 (6" Extended Anvil) | 1" | Chicago Pneumatic | Heavy Duty Impact Wrench • Free Speed 5,160 RPM • Working Torque 370-1,475 ft-lb • Max. Torque 1,920 ft-lb • Pinless closed reinforced rocking dog impact mechanism • Ergonomic side handle • Integrated protective cover on the clutch housing • Full teasing trigger • Regulator with integrated forward / reverse with 3 position power settings in both directions • 22.2 lbs |
| IR-2850MAX-6 (6" Extended Anvil) | | Ingersoll Rand | D-Handle Impact Wrench • Engineered for big jobs like Semi, Bus and Tractor Tires • Solid Steel Impact Mechanism delivers 2,100 ft-lb of Torque • 25% lighter than the industry's leading 1" wrench • 360° Adjustable Handle • Swivel hose connection • 9.79 lbs |
| IR-285B-6 (6" Extended Anvil) | | | Air Impact Wrench • Heavy Duty • 1,475 ft-lb Torque • Friction Ring-Thru-hole Retainer • D-handle Inside Trigger • The 285B combines exceptional power, control and durability • It delivers 1,770 ft-lb of maximum torque @ 120 PSI, with 5,250 RPM free speed and a high-efficiency, 6-vane motor • The swept-back 285B handle provides excellent maneuverability • 12.61 lbs |
| IR-285B-S6 (#5 Spline • 6" Extended Anvil) | | | |
| IR-W9691-K4E (Kit • 6" Extended Anvil) | | | 20V Cordless Impact Wrench 4 Battery Kit • 3,000 ft-lb Torque • Friction Ring-Thru-hole Retainer • D-Handle • Best-in-class power-to-weight ratio • 3,000 ft-lbs of nut busting torque, 2,200 ft-lbs of tightening torque • Impact Wrench is 25.9 lbs |

AIR GRINDERS, SANDERS & SCALERS



IR-3445

Ingersoll Rand 0.88 HP Super Duty Air Angle Grinder / Cut-off Tool • 4.5" Wheel • 12,000 RPM Max Free Speed • Rear Exhaust • Average Air Consumption 10 CFM • Air Consumption at Load 41 CFM • Air Inlet 1/4" NPTF • 3.44 lbs



IR-313A

Ingersoll Rand 7" Angle Sander, Composite Pad, 5,000 RPM, 0.5 HP • 7" pad that works up to 5,000 RPM • Side handle exhaust that blows air away from the work area, you never have to worry about debris getting in your space • 4.5 lbs



IR-125

Ingersoll Rand Standard Duty Air Needle Scaler • 4,800 BPM • Includes 19 Needles — each with a 1/8" diameter • 1-1/8" Stroke • Ideal for surface preparation work involving cleaning and removing paint, rust, dirt or weld slag • 6.24 lbs

AIR TOOL OIL & GREASE

| Code | Description |
|----------------------|---|
| IR-50P | Ingersoll Rand Air Tool Oil • 473 ml |
| ATOOLICE-160Z | ICEFREE Pneumatic Tool Lubricant • Remains Fluid at -55° F (-48° C) • Non-Toxic • Biodegradable • De-Icing • Superior Lubrication Qualities • Absorbs Moisture • Prevents Freezing • Restores Power • Enhanced Tool Protection • Provides Rust Protection • Prevents Tool Dieseling • 16 oz |
| IR-100-1-LB | Ingersoll Rand Grease for QA4 Series Nutrunner, 1-Pound Can |



SCAN QR CODE TO VIEW FULL SECTION

premacanada.ca | 1-800-268-6311 | sales@premacanada.ca | 33

IMPACT SOCKETS - 1/2" DRIVE



PREM-1412MD

14 Piece 1/2" Drive Deep Metric Impact Socket Set
• Sizes: 10 mm, 11 mm, 12 mm, 13 mm, 14 mm, 15 mm, 16 mm, 17 mm, 18 mm, 19 mm, 21 mm, 22 mm, 26 mm, 27 mm



PREM-1312D

13 Piece 1/2" Drive Deep SAE Impact Socket Set • Sizes: 7/16", 1/2", 9/16", 5/8", 11/16", 3/4", 13/16", 7/8", 15/16", 1", 1-1/16", 1-1/8", 1-1/4"



PREM-1511TP

11 Piece 1/2" Drive Extra Thin Wall Protector Impact Sockets • Fractional Sizes: 3/4", 13/16", 7/8", 15/16", 1", 1-1/16"; Metric Sizes: 17 mm, 19 mm, 21 mm, 22 mm, 23 mm



PREM-1503TP

3 Piece 1/2" Drive Extra Thin Wall Protector Set • This set contains one of each of 17 mm, 19 mm and 21 mm impact sockets with protector sleeve

| Code | Description | Size |
|--------------------|---|---------------|
| PREM-2021MD | 1/2" Drive Metric 6 Point Deep Length Impact Socket | 21 mm |
| PREM-2192DT | 1/2" Drive Extra Thin Wall Flip Socket | 19 mm / 21 mm |
| PREM-2392D | 1/2" Drive Thin Wall Flip Socket | 19 mm / 21 mm |
| PREM-2349D | 1/2" Drive Thin Wall SAE Flip Impact Socket | 7/8" / 15/16" |



PREM-2021MD



PREM-2192DT



PREM-2392D



PREM-2349D

IMPACT SOCKETS - 3/4" DRIVE



PREM-8032

11 Piece 3/4" Drive Standard and Deep Length Impact Socket Set with Metal Case • Deep: 3/4", 13/16", 7/8", 1", 1-13/16", 33 mm; Thin Wall Deep: 1-1/16", 1-1/8", 1-1/4"; Deep Budd: 1-1/2"; Square: 13/16"

IMPACT SOCKETS - 1" DRIVE



PREM-9152

10 Piece 1" Drive Truck Wheel Impact Socket Set • Standard: 7/8", 15/16", 1", 1-13/16"; Deep: 33 mm; Thin Wall Deep: 1-1/16", 1-1/8", 1-1/4"; Deep Budd: 1-1/2"; Square: 13/16"




PREM-9153

10 Piece 1" Drive Standard and Deep Length Impact Socket Set • Deep: 33 mm, 35 mm, 41 mm; Deep Budd: 1-1/2"; Thin Wall Deep: 1-1/16", 1-1/8", 1-1/4"; Square: 13/16", 17 mm, 21 mm

*Thin and extra thin impact sockets are not covered by any manufacturers warranties.



TORQUE WRENCHES

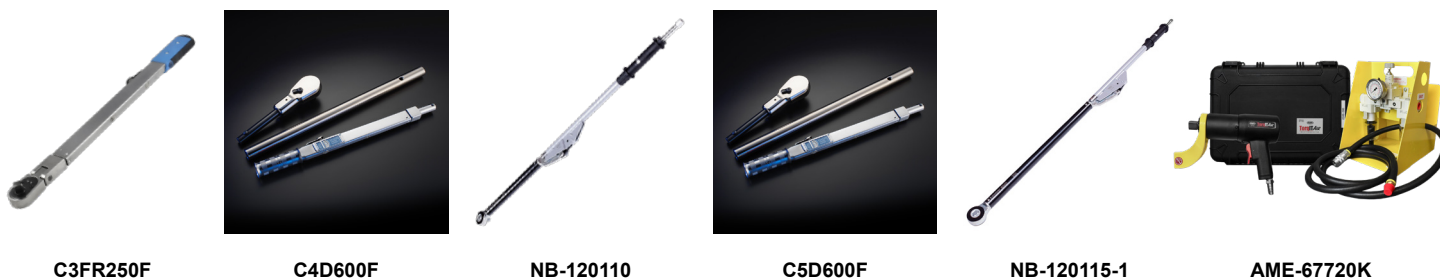

| Code | Drive | Brand | Description |
|--------------------|-------|-----------------------|---|
| C3FR250F | 1/2" | Precision Instruments | Split-Beam Torque Wrench with Flex Ratchet Head • 40-250 ft-lb • 5 ft-lb increments |
| C4D600F | 3/4" | Precision Instruments | Split-Beam Torque Wrench with Flex Ratchet Head • 200-600 ft-lb • 10 ft-lb increments |
| NB-120110 | | Norbar | Industrial 4AR-N Torque Wrench • Dual Scale • 150-600 ft-lb • Accuracy: ± 4 • Push-Through Ratchet allows 2 direction torqueing • New handle is more comfortable and guides hand to correct position • Can be split and packed in 2 parts |
| C5D600F | 1" | Precision Instruments | Split-Beam Torque Wrench with Flex Ratchet Head • 200-600 ft-lb • 10 ft-lb increments |
| NB-120115-1 | | Norbar | 5AR-N Torque Wrench • Dual Scale • 200-750 ft-lb • Back Break action • Robust with an unmistakable torque signal • Split for ease of storage and transportation |
| AME-67720K | | AME | TorqIT Air Pneumatic Torque Gun Kit • Range: 500-2,000 ft/lb • Includes Torque Gun, carrying case & air regulator |

CHROME PASSENGER & LIGHT TRUCK WHEEL NUTS

Our selection of Premier Performance Chrome Wheel Nuts are made with high quality chrome-plated steel that ensures simple installation, longevity and robust performance.

| Code | Description | Qty |
|----------------------|--|-----|
| A-LM001-10-50 | 12 mm x 1.5 Right Thread • Hex 13/16" • 36 mm length | 50 |
| A-LM019-10-50 | 12 mm x 1.5 Right Thread • Hex 3/4" • 35 mm length | 50 |
| A-LM030-14-30 | 14 mm x 1.5 Thread • Hex 21 mm • 54 mm length | 30 |
| A-LM030-16-30 | 14 mm x 2.0 Thread • Hex 21 mm • 54 mm length | 30 |
| A-LM041-14-30 | 14 mm x 1.5 Thread • Hex 22 mm • 46 mm length | 30 |
| A-LM045-10-30 | 12 mm x 1.5 Thread • Hex 19 mm • 43 mm length | 30 |
| A-LM859-10-40 | 12 mm x 1.5 Thread • Hex 21 mm • 36 mm length | 40 |



TRUCK WHEEL STUDS & NUTS



715SI
3/4"-10 Thread x
2-15/16" Lug Stud

333B
M22 x 1.5 Flange
Cap Nut • Hex
33 mm

SN-M22
Skirt Nut® M22 x 1.5 with Hex Cap is
the world's only patented 22 mm Wheel
Fastener for Hub-Piloted Wheels



SCAN QR CODE TO VIEW FULL SECTION

STUD, LUG NUT & HUB CLEANERS



CAB-SBCK-AD



AME-37330



AME-37350



CAB-WMK



AME-37500



CAB-STK-1322

| Code | Application | Description |
|---------------------|----------------|---|
| CAB-SBCK-AD | | Counteract Stud Brush Kit with Low Speed Air Driver • Clean 22 mm Studs • Includes: CAB-SBCT22 (Preloaded with SBR22), one SBR22 Replacement Brush, Safety Goggles, 1/2" Drive Adapter and Hex Key |
| AME-37330 | Passenger / LT | AME Hub Buddy XL Lug/Hub Surface Cleaner • Used with 1/2" impact wrench • Removes rust, corrosion and build-up from wheel stud, drums and tire rim • Includes 1 cleaning disc head |
| AME-37335 | | Replacement Cleaning Discs for AME-37330 • 6 Pack |
| AME-37350 | | AME Hub Bro Impact Wheel Hub Cleaner • Features a large diameter for cleaning wheel mounting surface • Used with 1/2" impact wrench • Diameter 6.3" x 2.56" • Strip-away style abrasive |
| AME-37355 | | Replacement Abrasive Pad for AME-37350 |
| CAB-WMK | HD Truck | Counteract Commercial Wheel Cleaning Kit with Low Speed Air Driver • Clean hub piloted commercial applications • Includes preloaded Stud Cleaner, Replacement Brushes, Safety Goggles, 1/2" Drive Adapter and Hex Key |
| AME-37500 | | AME Hub Buddy Truck Version Lug/Hub Surface Cleaner • Used with 1/2" impact wrench • Cleaning Disc will remove rust and corrosion leaving mating face clean for install • Includes 1 cleaning disc head |
| AME-37522 | | Replacement Cleaning Discs for AME-37500 • 10 Pack |
| CAB-STK-1322 | | Counteract OTR Stud Brush Cleaning Tool Kit • Clean 12mm - 22mm Studs • Includes: CAB-SBCT22 (Preloaded with SBR22), CAB-SBCT13 (Preloaded with SBR13), Replacement Brushes, Safety Goggles, 1/2" Drive Adapter and Hex Key |

LUG NUT / WHEEL LOCK REMOVERS & WHEEL GUARDS




2300K

12-Piece Passenger and Light Truck Wheel Lug Nut Removers • Use when key not available • Removes damaged lug nuts • Tapered left-hand thread grips tapered or straight threads • Also works on hex nuts • 1/2" drive



78537

Steelman Pro 16-Piece Locking Lug Master Key Set • Designed to remove locking lug nuts on aftermarket wheels • Includes 16 double hex-headed hex and tuner style keys • Made of heat-treated chrome vanadium steel and finished with corrosion resistant black oxide



60102-5903

Wheel Guard • 22 mm Stud Diameter • Standard • 10 Hole • 285 mm Hub Piloted

O-RINGS

Haltec Off-The Road Standard O-Rings for Tubeless Rims • Used to seal tire beads on Grader, Earthmover and Off-The-Road Rims

| Code | Description | Code | Description |
|-------------------|--------------------------------------|------------------|--------------------------------------|
| H-OR-220TG | Haltec O-Ring • 220T OTR • 20 x 1/4" | H-OR-320T | Haltec O-Ring • 320T OTR • 20 x 3/8" |
| H-OR-224TG | Haltec O-Ring • 224T OTR • 24 x 1/4" | H-OR-325T | Haltec O-Ring • 325T OTR • 25 x 3/8" |
| H-OR-232T | Haltec O-Ring • 232T OTR • 32 x 1/4" | H-OR-333T | Haltec O-Ring • 333T OTR • 33 x 3/8" |
| H-OR-25T | Haltec O-Ring • 25T OTR • 25 x 1/4" | H-OR-335T | Haltec O-Ring • 335T OTR • 35 x 3/8" |



AIR/HYDRAULIC BOTTLE JACKS & LIFT CYLINDERS



| Code | Brand | Capacity | Description | Min. Height | Max. Height | Weight |
|-------------------|---------|----------|--|-------------|-------------|-----------|
| AME-14455 | AME | 20 t | Jackzilla features an In-Line Regulator • Includes a 10" x 10" Jack Plate | 9.7" | 18.5" | 35 lbs |
| AME-14460 | Titan | 20 t | Chrome ram • Aluminum air motor • Heavy duty return springs | 9.7" | 18.5" | 38 lbs |
| GT-G432020 | Winntec | 20 t | Equipped with an air regulator • Chrome Ram, Welded Base and Return Springs | 10" | 18.5" | 38 lbs |
| AME-14461 | Titan | 20 t | Low Profile • Welded base • Chrome Pump Piston and Ram • Extension Screw | 5.8" | 10" | 21 lbs |
| GT-G432021 | Winntec | 20 t | Low Profile • Welded base • Chrome Ram • Aluminum Air Motor • Includes Air Filter and Air Regulator | 5.75" | 10.31" | 24.25 lbs |
| AME-13120 | AME | 55 t | Lightweight Aluminum Cylinder for easy handling and placing under vehicles • Includes Shut-Off Valve to allow the pump to be removed while the ram is extended • Aluminum Base for stability during field use • AME-13120 and AME-13121 Stroke: 6" • AME-13140 Stroke: 10" | 12.25" | 18.25" | 29 lbs |
| AME-13121 | | | | 11.75" | 17.75" | 29 lbs |
| AME-13140 | | | | 16.25" | 26.25" | 38 lbs |

HYDRAULIC FLOOR JACKS



| Code | Brand | Capacity | Description | Min. Height | Max. Height | Weight |
|-------------------|--------------|----------|--|-------------|-------------|----------|
| GT-G420303 | Winntec | 3 t | High quality durable Turbo Floor Jack | 5.12" | 19.29" | 94.7 lbs |
| AC-DK20Q | AC Hydraulic | 2 t | European-made Quick Lift Floor Jack | 3.14" | 19.5" | 68 lbs |
| AME-14350 | AME | 4 t | Lightweight Forklift Jack • Specially designed seals | 2.25" | 16" | 69 lbs |



AIR/HYDRAULIC FLOOR JACKS



GT-3531



GT-4532



GT-G432024



AC-25-2



AC-50-2




AME-14140

| Code | Brand | Capacity | Description | Min. Height | Max. Height | Weight |
|-------------------|--------------|----------|--|-------------|-------------|------------|
| GT-3531 | Gaither | 35 t | Durable A/H Floor Jack with solid base • Long handle | 7.3" | 16.7" | 93 lbs |
| GT-4532 | Gaither | 45/20 t | 2-Stage A/H Floor Jack • Built-in Water Separator • Long, one-piece handle | 5.9" | 16.53" | 99 lbs |
| GT-G432024 | Winntec | 24 t | Air Service Jack • Equipped with an extension screw and extension pegs • Stroke 5.55" | 8.46" | 17.36" | 92.59 lbs |
| AC-25-2 | AC Hydraulic | 25/10 t | 2-Stage A/H Jack for Buses and Trucks • Designed for heavy-duty, intensive commercial use • 2 Height Steps 10.82" and 14.96" | 7.08" | 14.96" | 132.27 lbs |
| AC-50-2 | AC Hydraulic | 50/25 t | 2-Stage A/H Jack for Heavy Buses and Trucks • Designed for heavy-duty, intensive commercial use • 2 Height Steps 13.38" and 17.71" | 8.7" | 17.71" | 176.37 lbs |
| AME-14140 | Titan | 22 t | A/H Service Jack with Extension Saddles | 8.27" | 20.67" | 110 lbs |

CRIBBING BLOCK SETS, JACK PLATES & STANDS

AME Cribbing Blocks are certified and tested • Multiple shapes and sizes • Interlocking or aggressive non-slip surface • Non-conducting plastic resists most oils and chemicals • Does not splinter like wood • Made from 100% recycled plastic

| Code | Description | Includes | Lanyard Colour |
|------------------|----------------------------------|---|-----------------------|
| AME-15255 | 10-piece Industrial Cribbing Set | (3) AME-15210 (6) AME-15230 (1) AME-14465 | Yellow Blue N/A |
| AME-15260 | 12-piece Industrial Cribbing Set | (12) AME-15230 | Blue |
| AME-15662 | 42-piece Industrial Cribbing Set | (42) AME-15230 | Blue |



AME-15210



AME-15230



AME-14465

| Code | Description | Lanyard Colour |
|--------------------|---|----------------|
| AME-14464 | 50 Ton Capacity Jack Plate • 12" x 12" x 1" • 5 lbs | Orange |
| AME-14468LT | 100 Ton Capacity Jack Plate • 24" x 24" x 2" • 24 lbs | Black |



AME-14464



AME-14468LT



AME-15002

AME-15002

3 Piece Heavy Duty Steel Crib Kit • Includes: 3", 6" and 9" High Stands — Durable, will not bend or warp • Recessed area on cribbing fits 7" Square Plate on 55 Ton Cylinders • Can be stacked with other AME Steel Crib Stands • Will not slide • Use individually or stack together



WIRE WHEELS & CUP BRUSHES

| Code | Description |
|-----------------|---|
| E367 | 3" Knot Type Wire Wheel • 1/4" Mounted Shaft • Wire Gauge 0.014 |
| EA-13583 | 4" Knot Type Wire Wheel • 3/8" Arbor Hole • Wire Gauge 0.014 |
| C204 | 2-3/4" Knot Type Wire Cup Brush • 5/8" - 11 Arbor Hole • Wire Gauge 0.020 |
| EA-17100 | 3-1/2" Cable Twist Cup Brush • 5/8" - 11 Arbor Hole • Wire Gauge 0.020 |



E367



EA-13583



C204



EA-17100

HAND CLEANERS & DISPENSER



5930443

Rema Tip Top Super Hand Cleaner • 11 L



PHC-SUPER

Prema Heavy Duty Hand Cleaner • Superior cleaning ability for hard to remove dirt and grime • Gentle to the skin • Suitable for daily use • Does not clog drains • 5 L



PHC-DISP

Prema/Rema Hand Soap Dispenser

PREMIUM AUTO CARE PRODUCTS



**EMZ44019
ULTIMATE SHINE**

Beautifies and renews the vehicle's interior. Spray Emzone Ultimate Shine on dashboards, air vents, doors and truck seats. The anti-static formula repels dust and prevents vehicles from any UV damage. Ideal to be used in cars, trucks, boats. It also provides high-gloss shine when used on vinyl, leather, rubber and plastic surfaces. Do not apply to steering wheels or foot pedals. 400 g



**EMZ45001
ENGINE SHAMPOO**

Heavy duty degreaser cleans heavy grease, dirt and oil deposits on engines. It is ideal for use on automobiles, trucks, power mowers, boats, tractors and industrial machinery. 446 g



**EMZ45002
PENETRATING LUBRICANT**

Emzone Penetrating Lubricant is a high strength, fast acting lubricant that loosens and lubricates tight or sticky parts. It is ideal for use on bolts, nuts, hinges, locks, tools, and rollers to stops squeaks, displace moisture and help prevent rust. 400 g



**EMZ45024
TECH LUBE**

Emzone Tech Lube offers long lasting protection with corrosion and rust inhibitors. The lubricant penetrates the surface and offers a strong, durable, and lasting barrier. The non-drip formula will not evaporate, will not dry and is not water soluble. 320 g



**EMZ45025
PRO-TEX NO DRIP OIL**

Long lasting, water resistant lubricant and rust inhibitor and coats and protects metals from rust, keeps moving parts and mechanisms well lubricated, penetrates to loosen seized parts, and inhibits rust in vulnerable crevice areas. An effective corrosion protection for outdoor equipment and is ideal for do-it-yourself vehicle undercoating and protecting battery terminals. Use to protect equipment for winter storage. Emzone Pro-Tex No Drip Oil is also silicone and solvent free. 400 g



**EMZ45028
PENETRATING FOAM**

Penetrates through rust and surfaces to allow tight or sticky parts to be loosened. The No Drip foam formula adheres to the surface while it penetrates, making work underneath automobiles and equipment easier with less mess. It also lubricates and protects surfaces against rust while repelling water and displacing moisture. The 360° valve allows spraying from any angle. 445 g



SCAN QR CODE TO VIEW FULL SECTION

premacanada.ca | 1-800-268-6311 | sales@premacanada.ca | 39

TIRE BAGS

| Code | Description | Dimensions | Size | Qty per Roll |
|----------------------|--|-----------------|-------------|--------------|
| 3-TBLRG-250 | High quality Tire Bags • 1 mm Thickness | 33" x 6" x 44" | Large | 250 |
| 3-TBLRG-IMAGE | High quality Tire Bags • 1 mm Thickness • Print your company logo, address or any custom message • 80 rolls minimum • Allow 4-5 weeks for production | 33" x 6" x 44" | Large | 250 |
| 3-TBXLRG-125 | Extra large Tire Bags • 1.25 mm Thickness | 32" x 15" x 48" | Extra Large | 125 |



3-TBXLRG-125

FLOOR MATS, PLASTIC SEAT & STEERING WHEEL COVERS

| Code | Description | Dimensions | Qty per Roll/Box |
|---------------------|---|-----------------|------------------|
| 3-FMSNG-500 | Slip N' Grip Prime Heavy Duty Treated Paper Floor Mat • Coloured Footprint Graphic • Great quality Wet Strength: 80 lbs | 17" x 19" | 500 |
| 3-SCE-500 | Slip N' Grip Plastic Seat Covers • Economy clear film • 0.5 mm Thickness | 32" x 13" x 39" | 500 |
| 3-SCP-250 | Slip N' Grip Plastic Seat Covers • Premium clear film • 0.7 mm Thickness • Roll | 32" x 13" x 42" | 250 |
| 3-SCP-BX-250 | Slip N' Grip Plastic Seat Covers • Premium clear film • 0.7 mm Thickness • Box | 32" x 13" x 42" | 250 |
| 3-SWC-500 | Slip N' Grip Clear Plastic Steering Wheel Covers • Double cloth band • Elastic design | 24" | 500 |

3-FMSNG-500



3-SCP-250



3-SCP-250


ROLOC GRINDING DISCS



Provides a fast, efficient method for grinding, cleaning blending, leveling and finishing all types of metal • Twist-lock • Aluminum oxide cloth • 25,000 RPM

| Code | Description | Grit | Qty |
|----------------------|---------------|------|-----|
| SRK3230GT-100 | 2" Roloc disc | 36 | 100 |
| SRK3250GT-100 | 2" Roloc disc | 50 | 100 |
| SRK3280GT-100 | 2" Roloc disc | 80 | 100 |
| SRK3330GT-100 | 3" Roloc disc | 36 | 100 |
| SRK3350GT-100 | 3" Roloc disc | 50 | 100 |
| SRK3380GT-100 | 3" Roloc disc | 80 | 100 |

SURFACE CONDITIONING DISCS



Shark Industries Quick Change Surface Conditioning Discs for high-performance cleaning and deburring • Removes grind marks, rust and coatings • Each conformable, non-woven disc features a Type R quick-change locking system that is easily attached to the backing pad • Swap out an old disc quickly and get back to work • Use with right-angle and die grinders • 25,000 RPM • Colour coded to reflect grit

| Code | Description | Grit | Qty |
|-----------------|-------------|--------|-----|
| SRK13062 | 2" Brown | Coarse | 25 |
| SRK13003 | 2" Brown | Coarse | 50 |
| SRK13019 | 3" Brown | Coarse | 25 |
| SRK13018 | 2" Burgundy | Medium | 25 |
| SRK13004 | 2" Burgundy | Medium | 50 |
| SRK13027 | 2" Blue | Fine | 25 |



Counteract® WHEEL PRO

Commercial Stud & Hub Cleaner



EASY SNAP-TECH DESIGN

- Completely new ergonomic tool and brush design
- Easily switch from stud cleaning to hub/wheel cleaning in a matter of seconds
- Two tool bodies available to cover both the automotive and commercial markets
- Full aluminum anodized body



Wheel Pro XL
CAB-WPXL-T22

WHEEL PRO XL

Covers over 90% of all commercial truck wheel-end applications



22mm Stud Brush
CAB-WPXL-SB22



60mm Hub Brush
CAB-WPXL-HB22



Wheel Pro
CAB-WP-T12

WHEEL PRO

Covers a large majority of automotive/light truck and trailer applications



12mm Stud Brush
CAB-WP-SB12



14mm Hub Brush
CAB-WP-SB14



40mm Hub Brush
CAB-WP-HB140



50mm Hub Brush
CAB-WP-HB150

Counteract® Socket Pro

Deep impact sockets work in cases of corroded and rounded lug-heads for commercial wheel and fastener applications.

Manufactured with quality chrome molybdenum alloy steel for superior torque and durability.

COMPATIBLE ON AT LEAST 6 DIFFERENT FASTENER TYPES:

6-Point 50% Rounded-Off Star Drive Square Spline 12-Point



Scan the QR code to see the beads in action.

- #1 internal balancer
- Easy throw in bag
- Increase fuel economy
- Longer lasting tire life
- No damage to inner liner
- Save time in the shop
- Can be injected through valve stem



**Serving Canada coast-to-coast for over 70 years.
Over 20,000 items for all your tire and wheel service needs
in the following categories and more:**

Tire Repair Materials

Tire Repair Tools

TPMS

Valves & Accessories

Wheel Balancing Supplies

Air & Cordless Tools

Impact Sockets

Air Lines & Fittings

Air Inflation Tools

Tire Service Chemicals & Lubricants

Tire Changing Tools & Accessories

Tire Service Tools

Wheel Service Tools

Jacks & Accessories

Shop Supplies

Automotive Parts

Automotive Supplies

Equipment

Shop Tools

Retread & Section Repair Tools

Repair Parts