



PREMA

TIRE AND WHEEL SERVICE SOLUTIONS

NO LIMITS,

just exceptional
products and service

NEW PRODUCTS

Page 1)

The latest technology
and supplies

SPRING 2026

AUTEL MAXITPMS

MX-sensor 1 SENSOR



FAST INSTALLATION
PRESS RELEASE
INTERCHANGEABLE
VALVE STEMS



THE BEST SELLING
AFTERMARKET SENSOR
IN NORTH AMERICA

99% VEHICLE
COVERAGE

ORIGINAL EQUIPMENT FIT FORM & FUNCTION



PROGRAMMABLE
UNIVERSAL TPMS



MAX SIGNAL
STRENGTH

BLUETOOTH LOW ENERGY TPMS SENSOR

- PRE-PROGRAMMED
- TESLA-READY
- PROGRAMMABLE FOR
BLE-EQUIPPED VEHICLES



MAXITPMS ITS600



HANDHELD TPMS SERVICE & DIAGNOSTIC TABLET

- Wireless Touchscreen/Android 9.0
- Activates, Reads and Relearns All Known Sensors
- Program AUTEL MX-Sensors to replace 99% of TPMS sensors on the vehicles on the road today
- On-Tool DOT Tire Registration with CIMS Account
- Enhanced, At-a-Glance Diagnostics Status Screen + TPMS Health Report
- Read/Erase All System Codes and Perform OLS, BMS, SAS & EPB
- Compatible with Autel's new Tesla-ready & programmable Bluetooth Low Energy TPMS Sensors

MAXITPMS TS900

3-IN-1 TPMS, ADVANCED DIAGNOSTICS, & SERVICE TABLET



Includes all features & functions of the ITS600 plus...

- Android 11 OS
- Perform Bi-directional Active Tests & Special Functions
- Extensive Service Menu with direct access to over 40 maintenance tasks
- Generate Detailed Pre- & Post-Scan Reports
- Wi-Fi sharing and printing



SET UP AUTOAUTH ON YOUR ITS600
 WATCH NOW

AUTEL®

1.855.288.3587 | AUTEL.COM | FOLLOW US @AUTELTOOLS

NEW PRODUCTS

PREMA

TIRE AND WHEEL
SERVICE SOLUTIONS

HEAVY DUTY PARTS WASH



Heptane based formula, unlike many Hexane based formulas currently on the market • Non-chlorinated • Deep cleaning and fast drying • Low odour • Use for degreasing and cleaning metal parts in a solvent tank or parts washer basin

Code	Size	Details
EMZ45280	18.9 L	Pail with Pull-Up Spout
EMZ45281	18.9 L	Pail - Threaded for Spigot (Sold separately as EMZ32339)



BLACK-COATED ZINC CLIP-ON WHEEL WEIGHTS

P-SERIES

Used on Passenger Vehicles, Full Size Pickups and Vans with Steel Wheels



Code	Weight	Qty
PZNB-025	0.25 oz	50
PZNB-050	0.50 oz	50
PZNB-075	0.75 oz	50
PZNB-100	1.00 oz	50
PZNB-125	1.25 oz	50
PZNB-150	1.50 oz	50
PZNB-175	1.75 oz	25
PZNB-200	2.00 oz	25
PZNB-225	2.25 oz	25
PZNB-250	2.50 oz	25
PZNB-275	2.75 oz	25
PZNB-300	3.00 oz	25

STEEL ADHESIVE WHEEL WEIGHTS

Pre-Taped Steel Standard Profile Adhesive Weights • Grey and Black Plastic Coated • 2 oz Segments (3 per Strip) • 6 oz Strips • 18 Strips / Box • 54 Segments / Box



VS7® CLEANERS & DEGREASERS



MTY-DL3000-1

Mighty VS7 Tropical Orange Degreaser is a concentrated all-purpose cleaner that is a combination of water miscible solvents, alkaline hydroxides, and non-ionic detergents designed to remove grease and grime from any hard surface areas • Dilute up to 1:50 • Biodegradable • Phosphate free • Citrus fragrance • 1 gal



MTY-DL2000-1

Mighty VS7 Industrial Purple Floor Cleaner is a concentrate cleaner/ degreaser formulated for floors, engines, tires, wheels, spot removing, and whitewall tires • Industrial Purple Floor Cleaner is economical to use, phosphate-free and has excellent hard water stability • 1 gal



MTY-DL3001-1

Mighty VS7 Precious Purple All Purpose Cleaner is an economical cleaner degreaser for use on engines, tires, hard surface areas, vinyl upholstery, carpets, and more • Use in hot or cold water • Safe on aluminum • Dilute up 1:4 to 1:10 for floors; 1:3 for general and 1:1 for heavy-duty cleaning • Grape fragrance • 1 gal



SCAN QR CODE TO VIEW FULL SECTION

premacanada.ca | 1-800-268-6311 | sales@premacanada.ca | 1


TIRE AND WHEEL
SERVICE SOLUTIONS

QUICK PLATE SETS



J22-LCM-40

LCM Ultra HD Wheel Balancing System • Includes LCM Centor Plate, 3 LCM Ultra Collets, LCM Ultra Spacer Disk, and LCM Centor Studs • Superior Wheel Balancing System for Light Commercial Truck and Motorhome Wheels • NEW TECHNOLOGY: The LCM Spacer Disk is hardened steel, unlike others on the market • The patented soft aluminum Spring Extension slides axially, also allowing proper engagement of the spindle hub spring • 4 different sets of LCM Studs are provided for multiple applications • These studs are spring loaded, allowing it to rest on the backplate

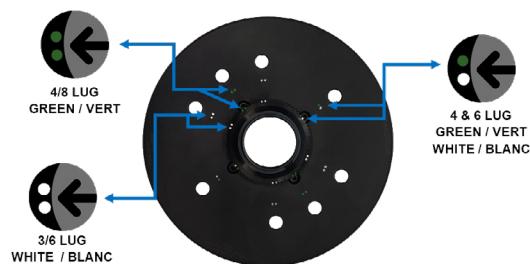

J20-LCSS-40

Combo Speedplate 6 Lug + 5 Lug with Torque Tips B, C, CL, & E • 6 Lug Plate converts into 4/8 Lug Bolt pattern • Covers: 3-lug, 4-lug, 5-lug, 6-lug and 8-lug wheels

HEAVY DUTY CRIBBING



AME-14441

Heavy Equipment (HE) Primo Cribbing Kit • 38-Piece Set • Made from durable 100% recycled plastic that will not rot or splinter • Interlocking pyramid design allows for a variety of stacking methods • Jack Plate pyramid surface design ensures a secure, exact fit with cribbing • Lock top Jack Plates provide greater stability to Bottle Jacks, Hydraulic Rams, Jack Stands and Cribbing • Includes: x18 15239, x4 15231, x6 15232 • Jack Plates included: x2 14464, x2 14465, x2 14466, x2 14468LT, x1 14497, x1 14499



AME's world-leading cribbing and blocking products significantly increase safety in the workplace and reduce hazards associated with lifting. These blocks and jack plates provide stable platforms for jacks and can even help get the jack up to a high lift point. Once lifted, our cribbing and jack plates can support your load, capturing the hazardous energy of tasking maintenance like tire and wheel service. Let us help make your job a little safer and easier.

MAGNETIC RETRACTABLE BARRIER

AME-95055

MAG-BEAR 25' Magnetic Retractable Barrier • This is a 25' Belt with printed CAUTION-DO NOT ENTER on a vibrant yellow band, ensuring ultimate safety • Magnetic Mounting System allows this product to be quickly and securely installed and uninstalled • Can be used in many situations like OTR Field Applications, Retread Shops, Commercial and Automotive Service Bays, etc. • Contains super-strong magnets to maintain a dependable and robust barrier • Great addition to any shop to enhance overall safety and security



NEW PRODUCTS

PREMA

TIRE AND WHEEL
SERVICE SOLUTIONS

AIR INFLATION & AIR TOOLS

MTIS-3-A5-X4

3-Way Multiple Tire Inflation System with Colour Coded 1/4" Hoses • Haltec automatic inflators provide a precision tool to maintain properly inflated tires with high speed and accuracy • Inflates up to 3 wheels simultaneously • Colour coded 1/4" inflation hose • 1/2" and 1/4" inlet/outlet • Suitable for use with standard or large bore valves and core extraction tools • Inlet pressure gauge • Dual LCD screens indicate gauged and targeted pressure • Operating Range: 5-145 PSI

MTIS-5-A4-X4

5-Way Multiple Tire Inflation System with Colour Coded 1/4" Hoses



IR-W7153-K22

DXS2 1/2" 20V Cordless Impact Wrench • 2 Battery Kit • 1600 ft-lb • Friction Ring Retainer • Pistol

Features the patented DXS® Drive Xchange System™ that uses a proprietary spline-type interface and fast-swap, interchangeable drives, so you can perform multiple jobs with one tool – without compromise.



IR-DXSK2H14L

DXS2 Drive Hex Deep SAE (Imperial) Impact Socket Set, 14-Piece • (INCHES) 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, 1-1/16, 1-1/8, 1-3/16, 1-1/8

IR-DXSK2M15L

DXS2 Drive Hex Deep Metric Impact Socket Set, 15-Piece • (12mm, 13mm, 14mm, 15mm, 16mm, 17mm, 18mm, 19mm, 21mm, 22mm, 24mm, 27mm, 30mm, 32mm, 33mm)

*Sockets are also available individually



25008

3-in-1 Quick Inflator & Valve Core Extractor Tool • Features Valve Core Installation, Valve Core Removal, and Quick Tire Inflation • Max. Inflation Pressure: 160 PSI / 11 bar • Ensures you don't lose the valve core or air in the tire during the process



SCAN QR CODE TO VIEW FULL SECTION



AIR-6345

Aircat Decal/Pinstripe Removal Tool • 2,600 RPM • 0.6 HP Motor • Built-in gear reduction for added power and added stall resistance • Spindle lock feature for easy accessory change • Ergonomic composite over mold grip provides comfort • Speed control switch located at the top of the tool for added control • Rotational Rear exhaust • Weight: 2.15 lbs • 2 year Aircat warranty

**6-HTS-T01B****Truck 1.0 Band Mounted Sensor**

- Universal Fit Strap - Ideal for trailers and mixed fleets; installs without valve replacement
- Durable band (Part #6-B01) with high tensile strength
- Compatible with standard tire service procedures
- Cost-effective retrofit solution for one-piece 17.5"-24.5" wheels

**6-HTS-T01A****Truck 1.0 Valve Mounted Sensor**

- Choose from 11 compatible metal clamp-in valves to suit your vehicle's wheel type and profile
- All valves are OE-replacement and meet high-pressure and temperature standards
- Designed for heavy-duty applications and long service life
- Use with 17.5" to 24.5" one-piece rims

**MANY VALVES AVAILABLE****6-VTTRUCK****Hamaton VT TRUCK 2.0 Tool**

The VT Truck 2.0 is engineered for the specific needs of truck and bus TPMS servicing, combining rugged design with expanded capabilities.

- Supports TPMS maintenance for trucks and buses
- Able to program by creating a new ID, copy ID, or manual ID entry to skip the relearn procedure
- Reads sensors easily, including in twin-wheel setups
- Manages up to 22 wheels per vehicle
- Regular updates for the latest heavy-duty vehicles
- Programs Hamaton's U-Pro Truck sensors for commercial use

Hamaton Heavy Duty TPMS Sensors & Valves



REPLACEMENT TPMS SENSORS

33500S
EZ-SENSOR

Dual Band Programmable TPMS EZ-Sensor with Snap-In Valve • Combines 314.9, 315 and 433 MHz applications into a single SKU

PREM-ONE
PREMA U-PRO

U-Pro Dual Frequency TPMS Sensor • 315 / 433 MHz • Interchangeable valve with the PREM-207 or 20018

PREM-NFC
PREMA U-PRO NFC

U-Pro Dual Band NFC TPMS Sensor • Smart Phone Programmable • 315 / 433 MHz • Interchangeable valve with the PREM-207 or 20018

AUT-1-SENSOR
AUTEL MX-SENSOR

Programmable Universal TPMS Sensor • Combines 315 MHz and 433 MHz frequencies into one TPMS sensor • Interchangeable Stem

17-43041
SMART SENSOR ONE

Smart Sensor One Multi-frequency Programmable Universal TPMS Sensor • Rubber Stem • Covers both 315 MHz and 433 MHz • Interchangeable Stem

591134
ALLIGATOR SENS.IT RS+

Dual Frequency TPMS Sensor with Rubber Snap-In Valve • 99.7% coverage and 100% OE mimic functionality • Frequency Range: 315 MHz & 433 MHz

PREM-TESLA
U-PRO HYBRID BLE

U-Pro Hybrid BLE Tesla Replacement TPMS Sensor with Black Clamp-In Valve • Pre-programmed for Tesla Model 3, S, X & Y

REPLACEMENT RUBBER VALVES



PREM-207



PREM-215A



AUT-MXSENSRVK

Code	Description	Valve Base
PREM-207	Replacement Snap-In Valve for Schrader GM, Ford and Programmable Sensors	
PREM-208	Replacement Clip Design Snap-In Valve for the 5775 Dodge Dart Sensor and Redi-Sensor	
PREM-210	Replacement Snap-In Valve for certain Schrader sensors on Ford, GM, and Subaru Vehicles between 2015-2024	
PREM-211	Replacement Snap-In Valve for Dodge Ram Models • Base has 4 square sides	
PREM-215A	Replacement Snap-In Valve for Smart Sensor	
20018	TPMS Snap-in Service Kit (Ford/GM) • Interchangeable with EZ-Sensor or U-Pro	
A-20008	TPMS Snap-in Service Kit (Ford/GM) • Interchangeable With EZ-Sensor or U-Pro	
AUT-MXSENSRVK	MX-SENSOR-only Rubber Valve Kit • Rubber Interchangeable Press-In Valve Stems • Exclusive Press Release Interchangeable Valve Stems • 4 Pack	
VS-65	Replacement Stem for 2014 Dodge Ram • Fits Schrader Sensor 28984 or Dill Sensor 6815 • Square Brass Stem • All 4 sides at Base	



SCAN QR CODE TO VIEW FULL SECTION

premacanada.ca | 1-800-268-6311 | sales@premacanada.ca | 5

TPMS SCAN TOOLS



PREM-H47

Prema H47 with Integrated OBDII Module • Free Lifetime Updates • Programs U-Pro Sensors • Activates or reads all other TPMS Sensors



AUT-TS508WF

Autel MaxiTPMS TS508WF with Wi-Fi updates • Features Quick and Advance modes of TPMS service and a TPMS status screen • Can read/activate/relearn all known sensors, has 4 methods of MX-Sensor programming, and performs placard value resets on supported vehicles • Displays on-tool MX-Sensor relearn procedures including OBDII and can do key fob signal tests



WRT600PRO

Bar tec Tech600PRO TPMS tool with VCI and 30 RITE-SENSORS • Wireless capabilities • 2.8" High Resolution Colour Display • 2.4 GHz WiFi • Qi Charging



AUT-ITS600

Wireless, touchscreen Android-based tablet • Complete TPMS diagnostics and service functions • 5.5" colour display and Bluetooth VCI • VINscan for rapid vehicle identification, four MX-Sensor programming options, OBDII relearn functionality and onscreen relearn instructions for all vehicles • Can activate, read and relearn all known sensors, perform TPMS system diagnostics and four common maintenance services • Provides DOT number scan, tire expiration notice, and access to recall lookup



AVT41

Alligator TPMS Wireless Programming and Diagnostic Tool makes programming Sens.it RS+ TPMS Sensors easy • Supports your workflow with wireless activation, cloning, programming and ECU resets



AUT-TS900

3-in-1 TPMS, Advanced Diagnostics, & Service Tablet • Includes all features & functions of the ITS600 • Android 11 OS • Perform Bidirectional Active Tests & Special Functions • Extensive Service Menu with direct access to over 40 maintenance tasks • Generate Detailed Pre- & Post-Scan Reports • Wi-Fi sharing and printing

TPMS MECHANICAL TOOLS



17-173

TPMS Torque Valve Core Tool • Maintenance-free precision ratchet mechanism • Safely tightens valve cores to specifications mandated for most TPMS sensor valves



5415

TPMS Snap-In T-10 Torque Driver • Pre-set to 12 in-lbs • Replaceable bit



17-168

TPMS Mechanical Tool Bundle • Complete with Torque Wrench, Core Tool, Grommet Tool, and many more



PREM-CORE

Nickel Valve Cores • 100 per box



17-492L-1

Long Black Plastic TPMS Caps with seal • 100 per box



7100

Dill TPMS Service Kit Assortment • Includes these 76 service kits (see website)





Air
Controls
Products

Made in
North America

LARGE BORE



SUPER LARGE BORE



SXL & SGB also available!

Dill® EverSeal™ OTR O-Rings

- Temperature Range:
-65°F to 275°F | -53°C to 135°C
- Used in multi-piece OTR wheel applications
- Constructed of an engineered thermo-polymer material for industry leading temperature range
- Made in North America



SCAN HERE



DILL OTR
CATALOG

Visit us on the web
www.DillValves.com

Technical Support
800-815-DILL (3455)


SCAN HERE

DILL OTR
O-RINGS &
L-RINGS



TUBELESS SNAP-IN TYPE VALVES - .453 and .625 Rim Holes

For use up to 65 PSI Cold Inflation Pressure maximum

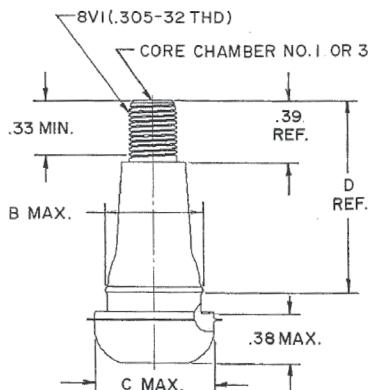

NOTES:

1. Recommended maximum rim thickness at valve hole for the snap-in type valves listed in table is .156". For usage beyond this limit consult valve manufacturer.
2. Valve Core: TR C1 (short core only for TR 412 valve). Valve cap TR VC2, VC3
3. In the case of applications above 210 km/h (130 mph) it is recommended to use a clamp-in valve instead of a snap-in valve.



412 412B 412C 413 413C 414 418 423 415 425

Code	Description	TR #	Rim Hole	B Max	C Max	D Ref
AA-412-10	Straight • Rubber	412	.453"	.66"	.78"	.88"
A-412B	90° Bend • Brass	412B	.453"	.66"	.78"	.88"
A-412C	Straight • Rubber • Chrome Sleeve	412	.453"	.66"	.78"	.88"
AA-413-50	Straight • Rubber	413	.453"	.66"	.78"	1.25"
EHA-413-100	Straight • Rubber	413	.453"	.66"	.78"	1.25"
A-413C	Straight • Rubber • Chrome Sleeve	413	.453"	.66"	.78"	1.25"
AA-414-50	Straight • Rubber	414	.453"	.66"	.78"	1.5"
EHA-414-100	Straight • Rubber	414	.453"	.66"	.78"	1.5"
AA-418-50	Straight • Rubber	418	.453"	.66"	.78"	2"
EHA-418-100	Straight • Rubber	418	.453"	.66"	.78"	2"
AA-423-10	Straight • Rubber	423	.453"	.66"	.78"	2.5"
AA-415-10	Straight • Rubber	415	.625"	.66"	1"	1.25"
AA-425-10	Straight • Rubber	425	.625"	.66"	1"	2"

HIGH PRESSURE SNAP-IN VALVES

Tubeless Snap-In Type Valves for high pressure applications • 600HP/602HP — 80 PSI Cold Inflation Pressure maximum

Code	Description	TR #	Rim Hole	C Max	D Ref
A-600HP	Specialty • High Pressure • Straight	600HP	.453"	.69"	1.27"
A-602HP	Specialty • High Pressure • Straight	602HP	.453"	.69"	2"



SPECIALTY VALVES

Code	Description	TR #	Rim Hole	Length
A-416	Clamp-In Tubeless Tire Valve for Passenger, Light Truck and Industrial Rims	416	.453" .625"	1.25"
A-523MS	High Performance Chrome Plated Low Profile Tire Valve	5991B	.453" .625"	1.15"
VS-902K	Ford F-Series Valve for Outer Accuride Steel Wheel • Brass	416S	.453"	1.96"
VS-962C	Ford F-Series Valve for Outer Accuride Steel Wheel • Brass	N/A	.453"	2.32"
VS-962WZ	Ford F-Series Valve for Outer Accuride Steel Wheel • Nickel	N/A	.453"	2.32"



VALVE CAPS

Code	Description	TR #	Qty
690	Dill Anodized Plastic Nitrogen Indicator Cap with Seal	N/A	100
A-VC8-100	Black Plastic Valve Cap	VC8	100



VALVE CORES

Code	Description	TR #	Qty
A-C1-HT-100-N	Standard Valve Core • High Temperature • Nickel Plated	C1	100
A-C1-HT-100	Standard Valve Core • High Temperature • Brass	C1	100



VALVE TOOLS



A-605-BH
4-Way Standard Valve
Repair Tool • Black
Hardened Steel



SRK22985
Valve Core Tool for
Standard Bore Valve
Cores • Screwdriver
Handle



2-296
2-Way Valve Repair
Tool • Combination
valve core installer •
Screws on valve mouth
to open core



231940
Green polymer Valve
Stem Puller and
Installation Tool with
built-in Valve Core
Remover • Made
in Germany of high
performance plastic that
will not bend or break



FW-70471
1/2" Wire Brush with
Plastic Handle



2-308AC
Lever Type Valve
Stem Puller • Heavy
duty body with no
bend • Deep notches
for better grabbing of
the rim




SCAN QR CODE TO VIEW FULL SECTION

BRASS CLAMP-IN TRUCK VALVES - 570 Series



Code	Description	TR #	Rim Hole	A
A-500-10	Premier Performance Tubeless Truck Valve • Brass	500	.625"	2"
A-50023	Premier Performance Tubeless Truck Valve • Brass • 23° Bend	500-23	.625"	2"
A-501-100	Premier Performance Truck and Bus Tubeless Truck Valve • Brass	501	.625"	1.5"
A-571-10	Premier Performance Tubeless Truck Valve • Brass	571	.625"	3.38"
A-572-100	Premier Performance Tubeless Truck Valve • Brass	572	.625"	3.75"
A-573-100	Premier Performance Tubeless Truck Valve • Brass	573	.625"	4.38"
A-574-10	Premier Performance Tubeless Truck Valve • Brass	574	.625"	5"
A-575-10	Premier Performance Tubeless Truck Valve • Brass	575	.625"	2"

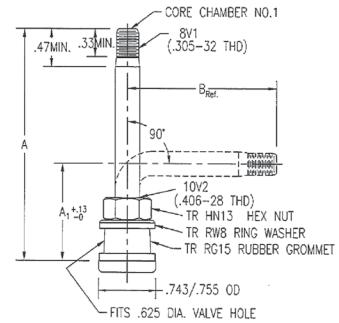

NOTES:

1. Valve Core: TR C1
2. Valve Cap: TR VC2, VC3
3. Recommended Nut Torque at Installation: 35-55 in-lbs

ALCOA O-RING VALVES & GROMMET VALVES

Code	Description	TR #	Rim Hole	Length
A-542-10	Premier Performance Alcoa O-Ring Valve	542	.382" / .394"	1.26"
A-543D-10	Premier Performance Alcoa O-Ring Valve • 60° Bend	543D	.382" / .394"	2.31" / 1.38"
A-543E-10	Premier Performance Alcoa O-Ring Valve • 75° Bend	543E	.382" / .394"	2.31" / 1.38"
A-544D-10	Premier Performance Alcoa O-Ring Valve • 60° Bend	544D	.382" / .394"	2.86" / 1.94"
A-545D-10	Premier Performance Alcoa O-Ring Valve • 60° Bend	545D	.382" / .394"	3.5" / 2.6"
A-545E-10	Premier Performance Alcoa O-Ring Valve • 75° Bend	545E	.382" / .394"	.98" / 2.6"
A-552-10	Premier Performance Alcoa Grommet Valve	552	.381"	1.259"
A-554D-10	Premier Performance Alcoa Grommet Valve • 60° Bend	554D	.381"	.98" / 1.94"
A-555D-10	Premier Performance Alcoa Grommet Valve • 60° Bend	555D	.381"	.98" / 2.6"



METAL VALVE CAPS AND CAP/CORE TOOLS

**33-0709**

Alligator V2B Metal Double Sealing Screw On Valve Cap • Doesn't need to be removed to check air pressure or add air — gauging and inflating is done directly through the valve cap


**A-VC3-100**

Premier Performance Metal Dome Shaped Valve Cap • TR # VC-3 • Qty 100


**VALVECAPR-PRO**

ValveCapper® Pro 3-in-1 Valve Cap/ Core Removal Tool • 11-3/4" • Holds onto caps for removing and replacing • Holds on to core for easy removal and installation

SWIVEL, TURRET, PLANETARY GEAR & STRAIGHT VALVES

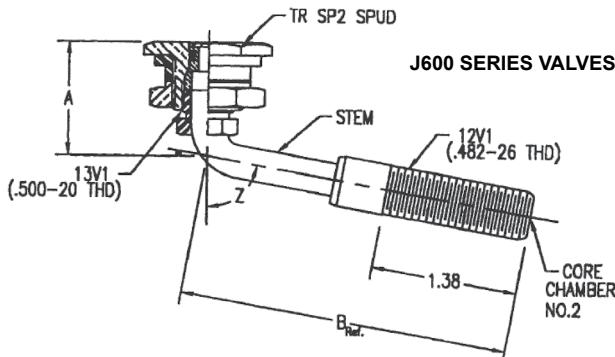

J4000 VALVES

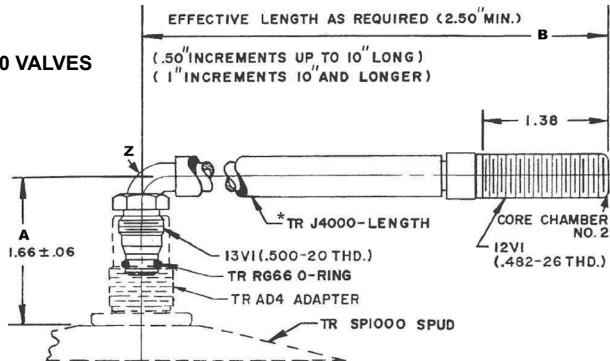

EXJ-653



A-J650



J-4000-4



J-4000-6



J-690-USA



J-691-USA



J-697-USA



EX-3150/1

Code	Description	TR #	Rim Hole	A	B	Z / Angle	NOTES:
EXJ-653	Dill Large Bore Swivel Valve	J-653	.812"	1.08"	2.5"	80°	
A-J650	Large Bore Swivel Valve with Rim Spud Assembly	J-650	.812"	1.08"	3.12"	80°	1. Valve Core: TR C2
J-4000-4	Dill Large Bore Swivel Valve	J-4000-4	.812"	1.66" ± .06"	4"	90°	2. Valve Cap: TR VC6, VC7, VC10
J-4000-6	Dill Large Bore Swivel Valve	J-4000-6	.812"	1.66" ± .06"	6"	90°	3. Recommended Torque at Installation: 70-80 in-lbs

Code	Description	TR #	Rim Hole	Length
J-690-USA	Dill Large Bore Turret Valve • 28° Bend	TRJ-690	.812"	5"
J-691-USA	Dill Large Bore Planetary Gear Wheel Valve	TRJ-691	.812"	3.125"
J-697-USA	Dill Large Bore Turret Valve • 25° Bend	-	.812"	5-1/2"
EX-3150/1	Dill Large Bore Straight Valve Stem	TRJ-670-2	.812"	1.4"



SCAN QR CODE TO VIEW FULL SECTION

TUBELESS AIR LIQUID VALVES



A-618A

A-621A

A-623A

A-622A

A-936B

VH936B

A-618RSI

Code	Description	TR #	Rim Hole	Length
A-618A	Large Bore Air Liquid Valve • Clamp-In	TR618A	.625"	1-7/8"
A-621A	Large Bore Air Liquid Valve • 65° Bend • Clamp-In	TR621A	.625"	3"
A-623A	Large Bore Air Liquid Valve • 65° Bend • Clamp-In	TR623A	.625"	2-1/4"
A-622A	Large Bore Air Liquid Valve • 90° Bend • Clamp-In	TR622A	.625"	4-1/2"
A-936B	Large Bore Air Liquid Valve • Clamp-In	-	.625"	9/16"
VH936B	Standard Bore Air Liquid Valve • Clamp-In	-	.625"	9/16"
A-618RSI	Large Bore Air Liquid Valve • Snap-In	TR618A	.625"	1-7/8"

LARGE BORE VALVE ACCESSORIES

Code	Description	TR #
A-65658	Outside Large Bore to Standard Bore Adapter/Reducer	AD-1
A-AD1	Inside Large Bore to Standard Bore Adapter/Reducer	AD-1
A-SP2	Large Bore Tubeless Tire Spud • Rim Hole: .812"	TRSP2
N-1510	Large Bore Cap Gauge • 0-160 PSI	-
A-C2	Large Bore Valve Core • Short • Brass	TRC-2
A-675	Large Bore and Standard Bore Valve Core Removal Tool	-
5261L	Large Bore Hex Cap Tool with Plastic Handle • 10.25"	-
EX-1525	4-way Large Bore and Air/Liquid Valve Repair Tool	-
310H	Haltec Large Bore Air/Liquid Core Ejector • 1/2" NPT	-
A-CH3	Air/Liquid Core Housing • New Style Fast Flow • O-Ring Seal	TRCH-3
A-670P	Agricultural Rim Hole Plug • Rim Hole: .625"	-



plasteel®

HYBRID-LOCK™
PLASTIC + STEEL BODY



HARDENED
STEEL CLIP

ALUMI-FLAKE™
METALLIC MATERIAL

CURVED
APPEARANCE



PLASTIC
FOR SOFTNESS

STEEL
FOR STRENGTH



RECYCLABLE
MATERIALS



EASY
APPLICATION



SCRATCHLESS
INSTALLATION



TECHNICIAN
APPROVED

AVAILABLE IN: MC FN AW IAW EN T P

PROUDLY MADE IN CANADA



DOMESTIC ADHESIVES

- MADE IN CANADA

- Feature nano-coating for corrosion protection
- Features QuikStik® tape from WEGMANN with instant stick and strong bonding; or Ultra-Liner® tape from WEGMANN that delivers results in cold-weather and high performance applications
- Available in strips and rolls
- Available in black

FEATURING:

- Anti-Roll
Back Break
On All 20 lb.
Adhesive Rolls

WITH OPTIONS
QuikStik® **ULTRA
LINER®**



PERFECT STEEL™ ADHESIVES

WITH
QuikStik®
ADHESIVE TAPE



- IMPORTED FROM WEGMANN CHINA
- Manufactured in our own OEM factory
- Features aftermarket standard powder coated segments for corrosion resistance
- Features QuikStik® tape from WEGMANN with instant stick and strong bonding
- Available in strips and rolls
- Available in black
- Unlike other imports, PERFECT STEEL™ is proven!

SKU	Description
200576FE	Steel QuikStik / .25 oz. / 3.00 oz. Strips / 48 per
200576FEBLK	Lead QuikStik Black / .25 oz. / Same as above
200576FER	Steel QuikStik / .25 oz. / 11 lb. Roll
200576FERBLK	NEW Steel QuikStik Black / .25 oz. / 11 lb. Roll
300224FE	Steel QuikStik / .50 oz. / 4.00 oz. Strips / 28 per
300224FEBLK	Lead QuikStik Black / .50 oz. / Same as above
300224FER	NEW Steel QuikStik / .50 oz. / 11 lb. Roll
300224FERBLK	NEW Steel QuikStik Black / .50 oz. / 11 lb. Roll

CLIP-ON WHEEL WEIGHTS

Prema Canada provides a wide selection of Clip-on Wheel Weights for most OEM vehicle applications, as well as after market wheels. Choose from Zinc, Plasteel® or Steel options to suit your needs.

Zinc


- Zinc appears in catalogue with a ZN designation
- Manufactured by molding
- 7.2 g – cm density
- Smallest physical size
- Used as original equipment on many vehicles
- Easier to install and remove than steel
- Zinc will not rust
- High quality coating

Plasteel®

- Plasteel appears in catalogue with a PS designation
- Stamped Construction
- 7.8 g – cm density
- Largest physical size
- Used as original equipment on some vehicles
- Easier to install than standard steel wheel weights
- Encased in a plastic shell to prevent corrosion

Steel

- Steel appears in catalogue with an FE designation
- Stamped Construction
- 7.8 g – cm density
- Larger size
- Used as original equipment on some vehicles
- May damage wheels during installation
- Coated to prevent corrosion

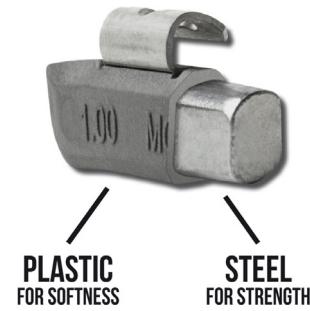

It is essential to refer to application charts or rim gauges to select the correct style of passenger wheel weight to fit your needs.

Clip Type	Applications	Zinc Codes	Plasteel® Codes	Steel Codes
P	Made for steel wheels and made to fit under hub caps	PZN-025 – PZN-300	PPS025 – PPS200	PFE025 – PFE300
MC	Used on most North American vehicles with alloy wheels	MCZN-025 – MCZN-300	MCPS025 – MCPS300	MCFE025 – MCFE300
IAW	Used on some European and some Asian vehicles with alloy wheels	IAWZN-005 – IAWZN-060	IAWPS05 – IAWPS60	IAWFE05 – IAWFE60
FN	Used on most Japanese vehicles with alloy wheels	FNZN-005 – FNZN-060	FNPS05 – FNPS60	FNFE05 – FNFE60
EN	Used on Mercedes, Audi and Volkswagen. Also used on many aftermarket alloy wheels with thin rim flanges	ENZN-005 – ENZN-060	ENPS05 – ENPS60	Unavailable
T	Used on some light trucks and SUVs with alloy or steel wheels	TZN-025 – TZN-300	TPS025 – TPS300	TFE025 – TFE300
AW	Used on most domestic vehicles prior to 1995 with alloy wheels	AWZN-025 – AWZN-300	AWPS025 – AWPS300	AWFE025 – AWFE300



STEEL ADHESIVE WHEEL WEIGHTS

Coated, lead-free

1/4 oz Weights

Code	Brand	Segments	Coating	Strip Weight	Strips per Box	Segments per Box
200576FE	Perfect	1/4 oz	Grey	3 oz	48	576
200576FEBLK			Black	3 oz	48	576
SADHS25C	Fortune	1/4 oz	Grey	2.5 oz	65	650
SADHS25BC			Black	2.5 oz	65	650
ECO025GR			Grey	3 oz	48	576
ECO025BK			Black	3 oz	48	576




200576FE



200576FEBLK

Code	Brand	Segments	Coating	Roll Weight	Segments per Roll
200576FER	Perfect	1/4 oz	Grey	11 lbs	704
200576FERBLK			Black	11 lbs	704
SADHR25C	Fortune	1/4 oz	Grey	11 lbs	704
SADHR25BC			Black	11 lbs	704
ECOR025GR			Grey	11 lbs	715
ECOR025BK			Black	11 lbs	715

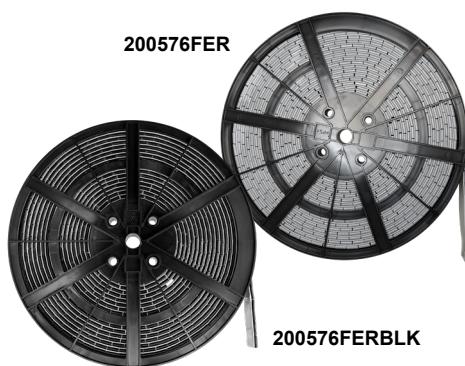

200576FER

200576FERBLK

1/2 oz Weights

Code	Brand	Segments	Coating	Strip Weight	Strips per Box	Segments per Box
300224FE	Perfect	1/2 oz	Grey	4 oz	28	224
300224FEBLK			Black	4 oz	28	224
SADHS50C	Fortune	1/2 oz	Grey	4 oz	40	320
SADHS50BC			Black	4 oz	40	320
ECO050GR			Grey	3 oz	48	288
ECO050BK			Black	3 oz	48	288



300224FE



300224FEBLK

Code	Brand	Segments	Coating	Roll Weight	Segments per Roll
300224FER	Perfect	1/2 oz	Grey	11 lbs	352
300224FERBLK			Black	11 lbs	352
SADHR50C	Fortune	1/2 oz	Grey	9 lbs	300
SADHR50BC			Black	9 lbs	300
ECOR050GR			Grey	9 lbs	300
ECOR050BK			Black	9 lbs	300



300224FER

300224FERBLK



SCAN QR CODE TO VIEW FULL SECTION

premacanada.ca | 1-800-268-6311 | sales@premacanada.ca | 15

STEEL ADHESIVE WHEEL WEIGHTS cont.

Coated, lead-free

1 oz Weights

STRIPS	Code	Brand	Segments	Coating	Strip Weight	Strips per Box	Segments per Box
	SADHS100C			Grey	4 oz	18	72
	SADHS100BC			Black	4 oz	18	72
	ECO100GR	Fortune	1 oz	Grey	6 oz	24	144
	ECO100BK			Black	6 oz	24	144




ECO100GR



ECO100BK

ROLLS	Code	Brand	Segments	Coating	Roll Weight	Segments per Roll
	ECOR100GR			Grey	10 lbs	161
	ECOR100BK	Fortune	1 oz	Black	10 lbs	161

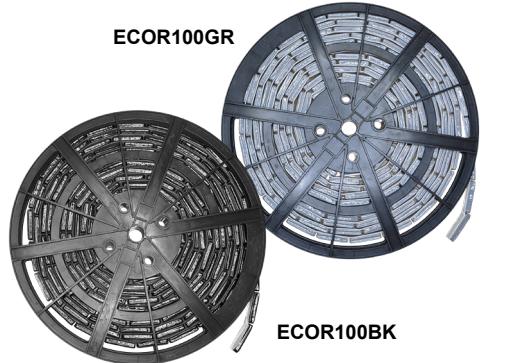

ECOR100GR

ECOR100BK

WHEEL WEIGHT TOOLS



25K
Wheel Weight Tool • Designed to install and remove clip-on wheel weights for passenger cars and light trucks • Plastic-coated handle provides a better grip



50K
Premium Clip-On Wheel Weight Hammer with "Clip Claw" Pliers



75K
Alloy Hammer • Replaceable soft acetate hammer face • Wooden handle • Rear mounted (replaceable) hardened steel "Clip Claw" horn



44011
StickPro Wheel Cleaning Spray • 22 oz bottle • Made for removing residue from adhesive wheel weights



2-RCT
Adhesive Wheel Weight Removal Tool • Chisel shaped end • Gentle treatment of aluminum and alloy wheels • Removes stick-on weights, decals, gaskets etc



IR-324
Adhesive Remover Air Tool • 3,700 RPM • 4" Pad • Includes 12 Eraser Pads • Designed to remove pinstripe tape, double-sided tape, adhesive and molding



IR-324-700-6
6 Eraser Wheel Pads for the Ingersoll Rand IR-324 Adhesive Removal Air Tool



EMZ45031
Emzone Citrus Degreaser • Heavy-duty multi-purpose degreaser formulated to cut and remove grease, dirt, grime, and oil from most surfaces • 390 g



BALANCING COMPOUNDS

Code	Description	Weight per Bag	Bags per Case
CAB01	Counteract Balancing Beads	1 oz	80
CAB02		2 oz	64
CAB03		3 oz	48
CAB04		4 oz	40
CAB05		5 oz	38
CAB06		6 oz	32
CAB08		8 oz	26
CAB10		10 oz	20
CAB12		12 oz	18
CAB14		14 oz	16
CAB16		16 oz	14

Code	Description	Weight per Bag	Bags per Case
ECOXL03	Eco XL Balancing Beads	3 oz	96
ECOXL04		4 oz	92
ECOXL06		6 oz	64
ECOXL08		8 oz	52
ECOXL10		10 oz	40
ECOXL12		12 oz	36
ECOXL14		14 oz	32
ECOXL16		16 oz	28



Counteract Balancing Beads are the economical way to balance the vehicle wheel assembly for the lifetime of the tire. Made of coated glass spheres, our balancing beads will not cause damage to the inner liner of the tire, they won't clump, regardless of excess moisture and are TPMS compatible.



Code	Description	Weight per Bag	Bags per Pail
LFP-100	Magnum+ Balancing Beads	3 oz	24
LFP-150		4.5 oz	24
LFP-200		6.5 oz	24
MFP-250		8.5 oz	22
MFP-300		10.5 oz	18
MFP-400		13 oz	14
MFP-500		16 oz	12

Code	Description	Weight per Pail
MBP8KG	Magnum+ Beads (loose, with scoop)	17.6 lbs



SCAN QR CODE TO VIEW FULL SECTION

PREMA PROFESSIONAL TIRE REPAIR START-UP KIT

PCAB-STARTUP

Each cabinet includes a repair manual, decals, and one (1) of each of the following items:

Code	Description
PCAB-1	Wall-Mounted Storage Cabinet with Keyed Lock • Dimensions: 20" W x 29-1/2" L x 7" D
IR-327LS-A	Air Tire Buffer • 7/16" Hex Quick Change • 0.5HP • 3,000 RPM
RH100-S	Flared Contour Buffing Wheel with 3/8"-24 Inner Nut • 2" x 3/4"
PCC-2	Carbide Cutter • Length of Carbide: Regular • Injury Diameter 1/4" (6.35 mm)
940	Wooden handle Skiving Knife with tapered point tip • Blade Length: 4" (101 mm)
2-915	Spiral Probe and Cement Tool
2-936	1/8" x 1-1/2" Plastic Handled Tire Repair Stitcher • Corrugated Wheel
2-933	Innerliner Tire Scraper
PPC-16	Prema Pre-Buff Cleaner • Spray • 16 oz
PFC-8	Prema Ultra Fast Dry Vulcanizing Cement • Brush top can • 8 oz
PLOS-16	Prema Innerliner Overbuff Sealant • 16 oz
SB2088B	Small Handled Cleaning Brush • Brass Bristles
PBS-32	Prema Bead Sealer • Extremely thick / will not drip • 32 oz
PC-2	Prema Combi #2 with Guide Wire • Injury Size 1/4" • Box of 15
80250	Markal B Hex Tire Crayon • White • Box of 12
SLP-9211	1-7/8" x 3/8" - 24 Threaded Quick Change Adapter with Washer & Nut • Black hardened
SLP-9215	1/4" Quick Change Adapter • Black hardened

PCAB-STARTUP

All the items, tools and chemicals required to complete industry-standard tire repairs.

View our video:
Repair a Tire
Puncture using
Industry Standards



* All contents are also available individually

TIRE REPAIR INSERTS



PRI-2

Code	Description	Length	Qty per Box
PRI-1	Premafill Reinforced Narrow Vulcanizing Insert • Passenger and Light Truck • Thin • Orange	3-3/4"	50
PRI-2	Premafill Reinforced Standard Vulcanizing Insert • Regular • Blue	3-3/4"	50
PRI-3	Premafill Reinforced Vulcanizing Insert • Truck • Blue	5-1/8"	40
PRI-4	Premafill Reinforced Vulcanizing Insert • Earthmover • Blue	7-1/2"	25

CORDLESS TIRE BUFFER



Video
Review:



IR-G4911-K1

Ingersoll Rand 20V Cordless Tire Buffer, 7/16" Hex Quick Change, 3,000 RPM • Kit includes 1 - G4911 Cordless 20V Tire Buffer, 1 - BL2012 20V 2.5Ah Battery and 1 - BC1121 Single Bay Charger



COMBI REPAIRS & STEMS

Code	Brand	Description	Injury Size	Qty per Box
PC-1	Prema	Combi #1 with guide wire	1/8"	40
PC-2		Combi #2 with guide wire	1/4"	15
PC-3		Combi #3 with guide wire	5/16"	10
PC-4		Combi #4 with guide wire	3/8"	10
A-3	Rema	Minicombi A3 with guide wire	1/8"	50
A-6		Minicombi A6 with guide wire	1/4"	40
B-10		Minicombi B10 with guide wire	3/8"	20
KX-386	Kex	Round Combi with guide wire	1/8"	24
KX-387			1/4"	25
KX-388			3/8"	25
PCS-2	Prema	Stem #2 with guide wire	1/4"	20
PCS-3		Stem #3 with guide wire	5/16"	20
PCS-4		Stem #4 with guide wire	3/8"	20



UNIVERSAL TIRE REPAIRS

Code	Brand	Description	Size	Qty per Box
PUR-2	Prema	Universal Round Repair 2	2"	50
PUR-3		Universal Round Repair 3	3"	50
PUS-2	Prema	Universal Square Repair 2	2"	100
PUS-3		Universal Square Repair 3	1-3/4"	100
PUS-4		Universal Square Repair 4	2-1/4"	50
UP-3	Rema	Universal Square Repair 3	1-1/16"	100
UP-6		Universal Square Repair 6	1-11/16"	50
UP-8		Universal Square Repair 8	2-3/16"	50
KX-UP-45	Kex	Universal Square Repair	1-1/4"	30
KX-UP-55			2-1/8"	30
PURO-30	Orange	Universal Round Repair	1-1/8"	120
PURO-50			1-15/16"	80
PUSO-45		Universal Square Repair	1-11/16"	80
PUSO-55			1-1/8"	80



SCAN QR CODE TO VIEW FULL SECTION

RADIAL TIRE REPAIRS

Code	Brand	Description	W	L	Ply	Qty per Box
PR-109	Prema	Radial Repair #109	2"	3"	1	20
PR-110		Radial Repair #110	2-1/4"	3-1/4"	1	20
PR-112		Radial Repair #112	3"	4-1/4"	1	10
PR-114		Radial Repair #114	3-1/2"	5-1/4"	1	10
PR-115		Radial Repair #115	3"	3-1/4"	1	10
PR-120		Radial Repair #120	3-3/4"	5"	2	10
RAD-110	Rema	Radial Repair #110	2-3/4"	2"	1	20
RAD-115		Radial Repair #115	3"	3-1/2"	1	20
RAD-120		Radial Repair #120	3"	4-7/8"	2	10
KX-MX10	Kex	Radial Repair #110	2"	3"	1	20
KX-MX12		Radial Repair #112	3"	4"	1	10
KX-MX20		Radial Repair #120	3"	5"	2	10
PRO-110	Orange	Radial Repair #110	2"	2-7/8"	1	20
PRO-112		Radial Repair #112	2-7/8"	3-3/8"	1	25
PRO-114		Radial Repair #114	2-5/8"	4"	1	10
PRO-120		Radial Repair #120	3"	4-3/4"	2	10



PR-110



RAD-110



KX-MX12



PRO-112

BIAS TIRE REPAIRS

Code	Brand	Description	Size	Ply	Qty per Box
PB-1	Prema	Bias Repair #1	2-1/4"	1	25
PB-2		Bias Repair #2	3-14"	2	10
PB-3		Bias Repair #3	3-3/4"	2	10
PB-4		Bias Repair #4	4-3/4"	2	10
PB-5		Bias Repair #5	4-3/4"	4	10
PB-6		Bias Repair #6	6-1/2"	4	10
PN-0	Rema	Bias Repair #0	1-9/16"	1	50
PN-3		Bias Repair #3	4"	2	10
PN-4		Bias Repair #4	5-3/4"	2	10
KX-470	Kex	Bias-Ply Repair	3"	2	20
KX-471			4"	2	10
KX-472			5"	3	10



PB-2



PB-3



PN-0



PN-4



KX-470



KX-471



TIRE REPAIR CHEMICALS

For best practices, match all tire repair patches and chemicals to one brand.

Brand	Vulcanizing Cement	Pre-Buff Cleaner	Liner Overbuff Sealant
	Brush top can • Flammable • Nearly indestructible bond between the tire and repair unit • 8 oz	Spray • Flammable • Use with Scraping Tool to dissolve lubricants and contaminants, creating a clean surface prior to innerliner buffering • 16 oz	Brush top can • Flammable • Properly applied repair sealer creates an airtight seal around a finished repair, overbuff areas or porous tire innerliners • 16 oz
Prema	PFC-8	PPC-16	PLOS-16
Rema	BL-8F	70F	76F
Kex	KX-511F	KX-491F	KX-508F



TEMPORARY TIRE REPAIR INSERTS



Kex Fat Brown Posi-Cord String Inserts



Kex Narrow Black Posi-Cord String Inserts

**KX-365**

Kex Deluxe Temporary Repair Kit
• Includes: T-Handle Injury Probe and Split-End Insertion Tools, 1 Jar of Lubricant and 50 **KX-361** 4" Fat Brown Posi-Cord String Inserts

TIRE REPAIR TOOLS & ACCESSORIES



High Tensile Carbide Cutters

Code	Injury Size	Adapter Code
PCC-2	1/4"	SLP-9215
PCC-3	5/16"	SLP-9216
PCC-4	3/8"	5196593



2-925
Premafill Installation Tool
• Passenger



2-925T
Premafill Installation Tool
• Truck



2-925RT
Pistol Grip Injury Probe and Preparation Combination Tool



Markal B Paintstiks

Code	Shape	Colour	Qty per Box
80220	Round	White	12
80221	Round	Yellow	12
80250	Hex	White	12



RH107
Rubberhog Flared Contour Buffing Wheel • 2-1/2" Dia. • Adapter: **SLP-9212**



942
Wooden Handle Skiving Knife • Flexible rounded tip • 4" Blade



HD351
Heavy Duty Awl • 4-1/2" Blade • Screwdriver handle



SCAN QR CODE TO VIEW FULL SECTION

MOUNT/DEMOUNT TOOLS



AME-71050

T45A

T47A

T46A


T20A

Code	Description	Length	Diameter	Weight
AME-71050	AME Golden Buddy Mount / Demount Truck Tire Removal System for 22.5" and 24.5" Tires / Wheels • Heavy duty steel construction ensures long life • Nylon rollers protect the bead • Tool Set includes: AME-71051 Demount Tool, the AME-71052 Mount Tool, and a Bead Keeper	39" / 42"	-	32 lbs / 10 lbs
T45A	Standard Tubeless Tire Mount / Demount Iron for Truck, Agricultural and Industrial Tires • Heat-treated for strength • Use in pairs • Tip ends insert easily and will not cut or rip bead or sidewall	37"	3/4"	4.6 lbs
T47A	Heavy Duty Straight Tubeless Mount / Demount Iron • Use on Standard and Large Truck Tires, including Industrial, Farm, Buses and Tractors • Heat-treated for strength • Use in pairs • Tip ends insert easily and will not cut or rip bead or sidewall	52"	1"	11 lbs
T46A	Straight Mount / Demount Tool • Use on Standard and Large Truck Tires, including Industrial, Farm, Buses and Tractors	36"	3/4"	4.5 lbs
T20A	Curved Tire Mount / Demount Spoon	30"	11/16"	3.1 lbs



T23A

Truck Lock Ring Remover • Designed to remove most Truck Lock Rings • A must-have for anyone mounting / demounting multi-piece rims • Use in pairs • Length 30" • Diameter 11/16" • Weight 3.1 lbs



GT-12894C

Polymer Coated Steel Truck Bead Keeper • Protects aluminum wheels from being scratched while it locks onto the flange of the wheel and holds the tire bead in place • Eliminates standing on the tire and/or chasing the bead around the wheel

BEAD SEATING AIR BLASTERS

3L, 6L, 10L and 14L tanks • The new BEAD BAZOOKA® utilizes an upgraded version of the trigger-operated rapid air release (RAR) valve technology found in the original BEAD BAZOOKA® models • The extra power it delivers allows it to be smaller and lighter while still allowing the user to seat even the most stubborn tire beads • Half the size twice the power • Serviceable/Replaceable RAR valve • Utilizes ultra-compact design • Anti-corrosion interior tank coating



GT-BB3L2

GT-BB6L2

GT-BB10L2

GT-BB14L3



HYDRAULIC BEAD BREAKERS



AME-11010

AME Combi Bead Breaker • Used on Construction Wheels up to 25" • Works on Single, 2 and 3-Piece Wheels • Tool clamps hydraulically to the wheel and then breaks bead with 11 tons of force • 3.75" Stroke Length • Used with 10,000 PSI (700 BAR) Air/Hydraulic Pump • Weight 34 lbs



AME-11020

AME Modified Combi Bead Breaker • Most parts interchange with common Bead Breakers • Larger clamp and feet allow the tool to easily clamp onto wheels • Compact design allows the tool to be used on the front or back side of wheel • Weight 38 lbs



AME-11076

AME Diamond Back Aluminum Bead Breaker with protective carrying case • Lightweight aluminum reduces weight by 40% • Longer feet allow for better fit onto the wheel/rim • Feet fully engage rim flange and push against the tire bead • Weight 31 lbs



AME-11000

AME OTR Giant Tire Bead Breaker • Only works on 5 piece wheels with bead loosening pockets • Most popular tool for breaking beads on earthmover tires sizes 25"-51" • 4-1/4" stroke ram • 13.8 tons of hydraulic force • Use with any 10,000 PSI (700 BAR) air/hydraulic pump • Weight 33 lbs

HYDRAULIC PUMPS & ACCESSORIES



AME-15920

5 Quart Air / Hydraulic Pump with Steel Reservoir • Builds 10,000 PSI of pressure to fit the majority of tools on the market • Operates on 80-120 PSI of Inlet Air Pressure • Durable metal air motor assemblies • Weight 23 lbs



AME-16030

8' Hydraulic Hose Only • 1/4" x 10,000 PSI Working Pressure • Complete with 3/8" NPT Hydraulic Coupler (AME-16060) and Adaptor (AME-16050)

BEAD BREAKING SLIDE BARS, WEDGES & HANDLES

Code	Description
AME-71500	AME Big Buddy Heavy Duty Slide Bar Bead Breaker with Spring • Easily breaks the most stubborn beads • User fatigue is reduced through spring-action tip, which reduces kick-back • Wedge tip is forced between the tire bead and wheel rim delivering the blow directly to the hammer tip • Heavy duty tool with 1 year warranty • Weight 24 lbs
T11E	Hickory Wood Handled Bead Breaking Wedge • Length 30" • Weight 8.5" lbs • Handle T11EH
T11ES	Wood Handled Bead Breaking Wedge with Grip Paint Handle • Length 30" • Weight 8-1/2 lbs • Handle T11EH-GRIP
T11EH	Replacement Hickory Wood Handle for T11E • Length 30"
T11EH-GRIP	Replacement Handle for T11 Series with Grip Paint Handle
B3033001GRIP	Replacement Handle for T11 Series with Grip Paint Handle • Length 30"



SCAN QR CODE TO VIEW FULL SECTION

premacanada.ca | 1-800-268-6311 | sales@premacanada.ca | 23



TIRE PROFESSIONALS INSIST ON



www.ameintl.net | swiley@ameintl.net
352.799.1111 | 352.721.4794

AUTOMOBILE • COMMERCIAL • AGRICOLE • OTR MINIER

AUTOMOTIVE • COMMERCIAL • AG / CONSTRUCTION • OTR / MINING



MOUNTING PASTES & COMPOUNDS

Code	Description	Volume	Mix Ratio
PEP-8	Prema Universal Mounting Paste • Provides excellent lubricity for mounting and demounting tires with minimal rim slip	7.7 lbs	1:1
PEP-8N	Prema Universal Mounting Paste • Low profile bucket		
2005	Murphy's Tire and Tube Mounting Compound can be used in its concentrated form or diluted in water • Amber colour	25 lbs	3:1
2180X	Rema Tip Top Concentrated Tire and Tube Mounting Compound for mounting tubeless tires or natural and synthetic tubes	25 lbs	4:1
2490	Rema Super Heavy Duty OTR Tire Mounting / Packing Compound • Will not separate or liquefy • Extra thick for superior bead packing	25 lbs	1:1
1515-25	Premier Performance Tire and Tube Mounting Compound • Great for OTR tire work • Temperature Range for use -25°C to +35°C	25 lbs	1:1



LIQUID LUBRICANTS

Code	Description	Volume	Mix Ratio
81511	Rema Tip Top Concentrated Liquid Tire Lubricant • Non-toxic • Contains no petroleum products • Lubricants can be applied by brush or spray bottle • Excellent lubrication • Superior "tack" and bead sealing qualities • Reduces tire/rim slippage • Near neutral pH factor	1 Gallon	1:1
81515		5 Gallons	
PTLC-1G	Prema Liquid Blue Tire Lubricant • Concentrated • Rust inhibitor added for better rim protection	1 Gallon	1:1 to 3:1
PTLC-5G		5 Gallons	
PTL-1G	Prema Liquid Blue Ready to Use Tire Lubricant • Greater lubricity for easier mounting/demounting • Dries tacky to prevent slipping on the rim • Rust inhibitor added to prevent rim corrosion	1 Gallon	1:1
2222-1	Premier Performance Concentrated Tire Mounting Lubricant • Economical • Rust Inhibitor added for better rim protection	1 Gallon	1:1 to 3:1
2023	Murphy's Tire and Tube Mounting Compound • Ready-to-use liquid for easy application • Soap-based • Easy to clean up • Non-toxic • Biodegradable • Moderate rust inhibition	5 Gallons	1:1
2053B		1 Gallon	
2054B	Rema Tip Top Super Slippery Bead Butter • Blue • Concentrated Mounting Liquid • Non-Toxic • No petroleum products • Can be applied by brush or spray bottle	5 Gallons	2:1
2055B		55 Gallons	



GRAPHITE LUBRICANTS

Code	Description	Volume	Mix Ratio
4444-5	Premier Performance Black Tire and Tube Mounting Lubricant • Rust retardant for metal wheel components • Ideal for aluminum and steel wheels and rims	5 lbs	1:1
4444-25		25 lbs	



SCAN QR CODE TO VIEW FULL SECTION

PREMIUM BEAD SEALER

Code	Description	Volume
PBS-32	Prema Bead Sealer provides a seal between the bead area of the tire and rim • Extremely thick / will not drip • Flammable	32 oz
777	Premier Performance Bead Sealer is designed to prevent stubborn bead seepage once applied to rim, after it is remounted • Flammable	32 oz



777

RIM RELEASE

Code	Description	Volume
PREM8153		3.78 L
PREM8253	Prema Rim Release • Makes removing tires from rusted rims easier • Frees stubborn beads without special tools or equipment	18.9 L
PREM8353		205 L



PREM8253

TIRE SEALANTS

Code	Description	Volume
1212-1G		1 Gallon
1212-5G	Premier Performance Tire Sealant • Canadian Made • Holds air pressure • Enhances casing life • Promotes retreadability	5 Gallons




1212-5G

LUBRICANT BRUSHES & SWABS



TI1506

Angled Lubricant Application Brush • Wooden Handle Length: 7-3/4" • Brush Length: 1-3/4" • Use for application of tire paste • Ergonomically shaped for ease of use • Lightweight at 0.23 lbs

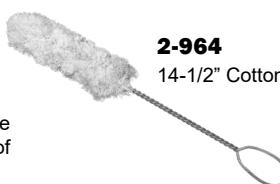

2-964

14-1/2" Cotton Tire Swab



2-965

11-1/2" Cotton Tire Swab

AUTOMOTIVE LUBRICANTS



EMZ45002

Emzone Penetrating Lubricant is a high strength, fast acting lubricant that loosens and lubricates tight or sticky parts • It is ideal for use on bolts, nuts, hinges, locks, tools, and rollers to stops squeaks, displace moisture, and help prevent rust • 400 g



EMZ45024

Emzone Tech Lube offers long lasting protection with corrosion and rust inhibitors • The lubricant penetrates the surface and offers a strong, durable, and lasting barrier • The non-drip formula will not evaporate, will not dry and is not water soluble • 320 g



MTY-BK122

Mighty VS7® Synthetic Moly Disc Brake Caliper Grease • Formulated to provide lasting protection against friction, wear and corrosion • 227 g



AUTOMATIC TIRE INFLATORS & INFLATOR GAUGES



89XDA

Single Tire Automatic Inflator • Diecast aluminum enclosure • IP66 • Self calibrates every 6 minutes • Factory installed 1/4" x 1/4" MNPT plug in the base of the inflator • Operating range 5-145 PSI • Accuracy +/- 0.3 PSI



MW-60-4WAY

4-Way Automatic Tire Inflator • 145 PSI x 4 Outlets • Measures air pressure with 4 types of measurements: kPa, BAR, PSI and kg/cm² • Pre-drilled holes for wall mount or mount to a tire cage with the use of an MW Stand Bracket • 110V with 1/4 Air Inlet • Inflate 4 tires from 0-145 PSI in 2 PSI Increments • Dimensions 9" x 10-1/2" x 3-1/2" • Includes (4) 8' Hoses



1991

Eurodainu Gauge - Michelin Type • Dial Type Air Line Service Gauge • Use when high visibility, accuracy and durability are important factors • Calibrated 10-170 PSI and 0.7-12 BAR • 2 lb increments • Includes a 5' Hose and a Euro Style Clip-On Chuck



AME-24861

OTR Whip Hose 20', 1/2" Ball Valve with Dial Gauge • Equipped with a safety coupler • 1/2" NPT connection, 3/8" ID for maximum air flow • Large bore chuck end only



AME-24867

AME Accu-Flate XL Digital Tire Inflator with 6' hose and clip-on chuck • 3-in-1 Function: Inflate, Deflate, and Measure Tire Pressure • Accuracy: +/- 2 PSI • Fully Automated • 0-174 PSI • 1/4" NPT female inlet • 2 AAA batteries included • Backlight LCD with 9 second auto off

PENCIL & DUAL FOOT GAUGES

Code	Description
5900	Digital Passenger Pressure Gauge • 3.5-100 PSI • LCD Reading • Automatic Shut-Off • Over mold rubberized plastic • CE Approved
5600-PREMA	Prema Mid-Range Pencil Gauge • Passenger • 4-Sided Nylon Bar — 2 sides calibrated 10-75 PSI in 5 PSI units, other 2 sides kPa 70-500
VH663	Low-Low Pressure Gauge • AG & OTR • 4-Sided Nylon Bar, calibrated 1-20 lbs in 1/2 lb increments
VH664	Dual Foot Service Gauge • Short • 4-Sided Nylon Bar, calibrated 20-120 lbs in 2 lb increments
7275R	Dill Dual Foot Long Truck Service Gauge • Great for servicing tilted Inner Dual Valves • 2-Sided Metal Indicator Bar • Calibrated 10-150 lbs in 2 lb units • Recalibration feature
7263	Dill Straight Push-On 30° Reverse Angle Short Truck Gauge • 4-Sided Nylon Indicator Bar • All 4 sides calibrated 20-120 PSI in 2 PSI increments • Black poly finish • Made in the USA
S-929	Straight Push-On 30° Reverse Angle Short Truck Gauge • 4-Sided Nylon Indicator Bar — 2 sides calibrated 20-120 PSI in 2 PSI increments, other sides 120-820 kPa in 20 kPa increments • Made in the USA • Gauge has a chrome body finish
7285R	Dual Straight Foot Long Service Gauge • Straight Chuck used for Inner Dual Valves • 30° Reverse Angle Chuck for Outside Dual Valves • 2-Sided Metal Indicator Bar • 10-150 lbs in 2 lb units • Recalibratable
SG-3	Recalibrateable Straight Push-On 30° Reverse Angle Long Truck Gauge • External Calibration feature that allows the use of a slot screwdriver to Recalibrate • 2-sided Black Metal Indicator Bar • Calibrated 10-150 PSI in 2 PSI increments on both sides • Black textured powder coat finish
VHP668	Straight Push-On and 30° Reverse Angle Long Truck Service Gauge • 2-Sided Nylon Indicator Bar • Both sides Calibrated 10-150 PSI in 2 PSI increments • Gauge has a black textured power coat finish



SCAN QR CODE TO VIEW FULL SECTION

premacanada.ca | 1-800-268-6311 | sales@premacanada.ca | 27


AIR LIQUID & OTR GAUGES

Code	Description
VH660	Air Liquid Tractor Gauge for Air and Liquid Filled Tires • 4-sided nylon bar, calibrated 5-50 lbs in 1 lb increments
7233	Large Bore Swivel Ag/OTR Tire Gauge • Nylon Indicator Bar • 10-150 PSI
7235	Large Bore Swivel Ag/OTR Tire Gauge • Metal Indicator Bar • 10-150 PSI • Recalibratable



EURO CHUCKS

Code	Description
6293-C	Euro Style Chuck and Clip • 1/4" Hose Barb • Firmly locks onto valve while inflating the tire • Open
6293-D	Euro Style Chuck and Clip • 1/4" NPT Female End • Closed
6293-E	Euro Style Chuck and Clip • 1/4" NPT Female End • Open
IN-20	Core Removal and Tire Inflation Chuck reduces inflation time by 50% • Features Clip-On Style Chuck • Made of durable steel, brass, and polycarbonate • 1/4 Female NPT • Ideal for nitrogen purging/inflation • Retractable core housing allows safe removal/replacement of valve core

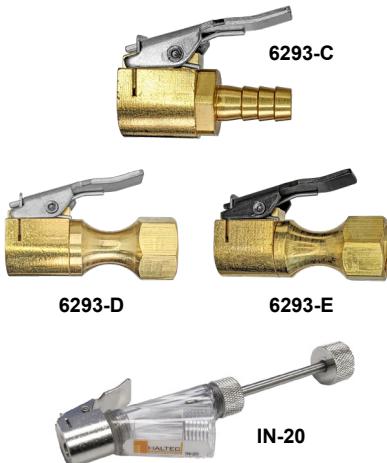

DUAL FOOT & LARGE BORE CHUCKS

Code	Description
6175	Dual Foot Straight On and 30° Reverse Angle Lock On Air Chuck • For inner dual wheel hard-to-reach valves on tractor, dual wheel truck and bus tires • Black poly finish • Made in the USA • 7" Length • Closed
VHP698	Straight On and 30° Reverse Angle Dual Foot Lock-On Air Chuck • For inner dual wheel hard-to-reach valves on tractor, dual wheel truck and bus tires • Pushes or pulls on tire valve • Length 6" • 1/4" Female NPT • Closed end for use on air lines • Black finish
VHP698L	Straight On and 30° Reverse Angle Dual Foot Lock-On Air Chuck • For inner dual wheel hard-to-reach valves on tractor, dual wheel truck and bus tires • Pushes or pulls on tire valve • Length 14" • 1/4" Female NPT • Closed end for use on air lines • Black finish
EX-4660-A	Large Bore Clip-On Air Chuck • Securely locks onto the valve when the clip is pushed forward • 1/4" Female NPT • Closed



SAFETY INFLATION CAGES



MIC-2

Portable 2 Bar Safety Inflation Cage • Certified for inflating tires up to 130 PSI • Compact and lightweight • Folds down to 7-18" H for easy storage • Meets or exceeds OSHA Standard 29 CFR 1910.177 • Dimensions: 25-3/4" L x 21-1/8" W x 57" H • Maximum Tire Size: 50" OD x 16" W • Weight: 59 lbs



MIC-4

Truck 4 Bar Safety Inflation Cage • Certified for inflating tires up to 130 PSI • Meets or exceeds OSHA Standard 29 CFR 1910.177 • Dimensions: 31-3/4" L x 26-1/4" W x 57-1/2" H • Maximum Tire Size: 47" OD x 19" W • Weight: 147 lbs



TREAD DEPTH GAUGES



5800



5123



5127



5131

Code	Description
5800	Dill Digital Tread Depth Gauge • Displays in mm, inches, and fractions • The LCD display is in 1/32" increments (makes switching from traditional mechanical gauge simple) • The zero function allows you to zero the gauge at any point, making readings quick and extremely accurate
5123	Dill Tread Depth Gauge • Range: 0 – 1" in 32nds and 0 - 25 mm in 1 mm increments
5127	Dill Colour Coded Tread Depth Gauge with Metal Indicator Bar • Shows Red - Yellow - Green • 0 - 32 in 32nd increments
5131	Haltec OTR T-Bar Tread Depth Gauge • 2 Piece Gauge made up of Slide Tube and Indicator • Calibrated 0 - 6" in 32nd increments and 7 - 152 mm Metric • Tubing spans tread lugs on Off-Road Tires

TIRE SPREADERS

**AME-73100**

AME Air Operated Tire Spreader with stand • For passenger / RV / light truck tires • Wide platform for stable work surface • Adjustable light

**AME-73200**

AME Automatic Tire Spreader • Air lift allows operator to repair without lifting • Heavy gauge steel • Lamp included • Air regulator / lubricator included • Weight 310 lbs

**50-RB**

Rep Boy Floor Mounted Manual Tire Spreader with rollers and tilt • Portable • Heavy duty steel construction • Repair platform rotates 360° • Spreading claws fit 13" - 20" passenger and light truck tires • Oversized base-plate provides safe and stable workstation

WHEEL DOLLIES & TIRE CARTS



AC-WT1500NT



AC-WTA500



GT-G471105



GT-G472270



GT-Y471106



MTC

Code	Description
AC-WT1500NT	Hydraulic Wheel Trolley with a handle that facilitates easy turning of large wheels • Wheel Sizes: Min. Ø 39.37" - Max. Ø 94.48" • Wheel Width: Max. 47.24" • Capacity: 1.5 t • Easy handling of the largest wheels in the world • A handle facilitates easy turning of the wheel on the trolley • A simple switch for easy jaw expansion or retraction
AC-WTA500	AC Hydraulic Wheel Trolley for Use on Vans, Trucks and Buses • Adjustable Lifting Arms for Wheel Sizes 10.5" - 51" • 0.5 Ton Capacity • Pedal Operated Pump leaves both hands free • Flexible and ergonomic design for the easy removal of wheels and brake drums • Lifting Arms with Roller Bearings for easy rotation of the wheel into the correct position • Bracket for easy securing of the wheel while transporting • Nylon Castor Wheels
GT-G471105	Winntec Heavy Duty Wheel Dolly • 3 Position Rollers Accommodates Tire / Wheel Assemblies from 6.5" - 24.5" • 551 lb Lifting Capacity • Heavy-duty industrial bearings • 3 positions for rollers depending on tire size
GT-G472270	Winntec Wheel Assist — Gen 2 • Handles all Passenger Tires including Run-Flats • Easily lift heavy tire/wheel assemblies • Reduces physical strain • Ergonomically Correct • Maintenance-free
GT-Y471106	SAFERGO Truck Wheel Dolly with Shock Absorbing Castors and Hydraulic Lifting Bottle Jack built within the frame • Lifting Capacity 350 lbs • Reduces back strain • Includes Gaither O-LINE-ER® • Collapsible handle frame
MTC	Martins Tire Rider Tuff - Tire cart • Toughest tire cart on the market with its 550 lb loading capacity • Carry 8 tire/wheel assemblies of up to 35" OD • 2-year warranty + lifetime warranty on spring mechanism • Rubber wheels are solid and flat free



SCAN QR CODE TO VIEW FULL SECTION

premacanada.ca | 1-800-268-6311 | sales@premacanada.ca | 29

WIRE WHEELS & CUP BRUSHES

Code	Description
E367	3" Knot Type Wire Wheel • 1/4" Mounted Shaft • Wire Gauge 0.014
EA-13583	4" Knot Type Wire Wheel • 3/8" Arbor Hole • Wire Gauge 0.014
C204	2-3/4" Knot Type Wire Cup Brush • 5/8" - 11 Arbor Hole • Wire Gauge 0.020
EA-17100	3-1/2" Cable Twist Cup Brush • 5/8" - 11 Arbor Hole • Wire Gauge 0.020



WHEEL CHOCKS



AME-15300

Rubber Wheel Chock • Durable construction • Eye Bolt for chain or rope attachment • Ribbed pyramid design • Either side of wheel chock can be positioned against the tire • 10 lbs



AME-15355

Safety Orange Urethane Wheel Chock • Tough construction • Chemical resistant • For 65" - 95" Tire Size • Dimensions: 17" L x 14.5" W x 14.5" H • 14 lbs

CALCIUM PUMPS



AME-15090

1" Graco Calcium Pump with Kit • 50 Gallon (189 Liter) per minute capacity • 1:1 Ratio Double Diaphragm Pump



AME-15100

1" Yamada Calcium Pump with Kit • High quality unit with 40 Gallon (152 L) per minute capacity • 1:1 Ratio Double Diaphragm Pump • Weight: 38 lbs (17.2 kg) • Features: Two 10' Rubber Hoses, Metal Shut-Off Valve, and Ejector Gun

TIRE REGROOVERS & BLADES



PCU-115


115 V Prema Tire Regroover • 4 Level Temperature Switch • Approved German TUV Certification with CE Conformity • Comes without Plug End • Compatible with Cutting Blades from 3 mm to 28 mm




GR3/R-3



GR3/W-4



GR3/R-1 - GR3/R-5



GR3/W-1 - GR3/W-6

RILLFIT TIRE REGROOVER BLADES

Dimensions (mm)

Code	Shape	A	B	C	D	Qty
GR3/R-2	Round	5	7	8	21	20
GR3/R-3	Round	6	10	15	21	20
GR3/R-4	Round	8	12	16	23	20
GR3/R-5	Round	10	12	18	25	20
GR3/W-1	Angled	3	7	5	21	20
GR3/W-2	Angled	5	7	6	21	20
GR3/W-3	Angled	7	10	10	22	20
GR3/W-4	Angled	9	12	13	24	20
GR3/W-5	Angled	11	12	15	23	20
GR3/W-6	Angled	23	12	28	24	10



CHANGING THE WAY THE WORLD CHANGES TIRES.



BEAD BAZOOKA
Gaither



BEAD BOOSTER
Gaither

Gaither
PROFESSIONAL EQUIPMENT

www.gaithertool.com

Email: sales@gaihertool.com | Phone: 217.245.0545

IMPACT WRENCHES - 1/2" & 3/4" DRIVE



CP-7748

CP-7748-2

AIR-1431-2

IR-2235QTIMAX

IR-2235TI2MAX

IR-2235TIMAX



IR-231HA-2



IR-W7152-K22



IR-2145QIMAX



IR-261

Code	Drive	Brand	Description
CP-7748		Chicago Pneumatic	Brute Impact Wrench • Max. torque reverse 960 ft-lb • 3 power settings • Lightweight composite housing • Durable twin hammer clutch • 360° swivel air inlet • One-handed forward / reverse (ring system)
CP-7748-2 (2" Extended Anvil)			
AIR-1431-2 (2" Extended Anvil)		Aircat	Provides 800 ft-lb maximum torque and 1,000 ft-lb of loosening torque • Hard hitting twin hammer mechanism delivers maximum power • Grip is ergonomically designed to perfectly fit the hand, providing unmatched comfort for the user • Cross bolt forward/reverse and power management control • Triple heat treated Ni-Cr-Mo alloy steel hammer mechanism parts and anvil provide ultimate reliability • Grey Pneumatic® Thin Wall Flip Socket (19 mm / 21 mm) • 6 lbs
IR-2235QTIMAX (Quiet Technology • 2" Extended Anvil)	1/2"		
IR-2235TI2MAX			Lightweight Balanced Air Impact Wrench • 930 ft-lb Nut-Busting Torque • 8,500 RPM • Titanium Hammer Case • Impact and Chemical Resistant Housing • Optimized for the vehicle repair industry, heavy trucks, tire lanes, fleet maintenance, body shops, general industrial use • 2 Year Warranty • 4.6 lbs
IR-2235TIMAX (2" Extended Anvil)			
IR-231HA-2 (2" Extended Anvil)			Super Duty • 600 ft-lb Torque • 8,000 RPM • Friction Ring Retainer • Pistol
IR-W7152-K22 (Kit)			20V High-torque Cordless Impact Wrench Kit with Standard Anvil • Kit includes 2 - 5.0Ah IR-BL2022 Batteries, Tool Charger and Carry Bag • Powerful Brushless Motor delivers durability and efficiency • Variable Speed Trigger and 4 IQ Power Control System Settings
IR-2146Q1MAX	3/4"	Ingorsoll Rand	3/4" Air Impact Wrench • Quiet • 2,000 ft-lb Torque • Friction Ring-Thru-hole Retainer • Pistol • Only 7.8 lbs
IR-261			Air Impact Wrench • Super Duty • 1,100 ft-lb Torque • Friction Ring Retainer • Pistol • 12.4 lbs



IMPACT WRENCHES - 1" DRIVE



CP-7782-6



AIR-1992-A



IR-285B-6



IR-285B-S6



IR-W9691-K4E

Code	Drive	Brand	Description
CP-7782-6 (6" Extended Anvil)		Chicago Pneumatic	Heavy Duty Impact Wrench • Free Speed 5,160 RPM • Working Torque 370-1,475 ft-lb • Max. Torque 1,920 ft-lb • Pinless closed reinforced rocking dog impact mechanism • Ergonomic side handle • Integrated protective cover on the clutch housing • Full teasing trigger • Regulator with integrated forward / reverse with 3 position power settings in both directions • 25.57 lbs
AIR-1992-A (6" Extended Anvil)		AirCat	Straight Impact Wrench • Provides 1,800 ft-lb maximum torque and 2,000 ft-lb of loosening torque • 5,000 RPM • Low maintenance pin-less hammer provides ultimate reliability and added hitting power • Features enlarged inner cavity of rotating "D" handle grip • Combined forward/reverse and power management switch • 27.8 lbs
IR-285B-6 (6" Extended Anvil)	1"	Ingersoll Rand	Air Impact Wrench • Heavy Duty • 1,475 ft-lb Torque • Friction Ring-Thru-hole Retainer • D-handle Inside Trigger • The 285B combines exceptional power, control and durability • It delivers 1,770 ft-lb of maximum torque @ 120 PSI, with 5,250 RPM free speed and a high-efficiency, 6-vane motor • The swept-back 285B handle provides excellent maneuverability • 12.61 lbs
IR-285B-S6 (#5 Spline • 6" Extended Anvil)			20V Cordless Impact Wrench 4 Battery Kit • 3,000 ft-lb Torque • Friction Ring-Thru-hole Retainer • D-Handle • Best-in-class power-to-weight ratio • 3,000 ft-lbs of nut busting torque, 2,200 ft-lbs of tightening torque • Impact Wrench is 25.9 lbs
IR-W9691-K4E (Kit • 6" Extended Anvil)			

AIR GRINDERS, SANDERS & SCALERS



IR-3445

Ingersoll Rand 0.88 HP Super Duty Air Angle Grinder / Cut-off Tool • 4.5" Wheel • 12,000 RPM Max Free Speed • Rear Exhaust • Average Air Consumption 10 CFM • Air Consumption at Load 41 CFM • Air Inlet 1/4" NPTF • 3.44 lbs



IR-313A

Ingersoll Rand 7" Angle Sander, Composite Pad, 5,000 RPM, 0.5 HP • 7" pad that works up to 5,000 RPM • Side handle exhaust that blows air away from the work area, you never have to worry about debris getting in your space • 4.5 lbs



IR-125

Ingersoll Rand Standard Duty Air Needle Scaler • 4,800 BPM • Includes 19 Needles — each with a 1/8" diameter • 1-1/8" Stroke • Ideal for surface preparation work involving cleaning and removing paint, rust, dirt or weld slag • 6.24 lbs

AIR TOOL OIL & LUBRICATION KITS

Code	Description
IR-50P	Ingersoll Rand Air Tool Oil • 473 ml
ATOOLICE-160Z	ICEFREE Pneumatic Tool Lubricant • Remains Fluid at -55° F (-48° C) • Non-Toxic • Biodegradable • De-Icing • Superior Lubrication Qualities • Absorbs Moisture • Prevents Freezing • Restores Power • Enhanced Tool Protection • Provides Rust Protection • Prevents Tool Dieseling • 16 oz
IR-115-LBK1	Air Care Lubrication Kit for Ingersoll Rand Impact Wrenches • Includes 10Z4 oil, 115-4T Grease and Grease Gun



SCAN QR CODE TO VIEW FULL SECTION

premacanada.ca | 1-800-268-6311 | sales@premacanada.ca | 33

IMPACT SOCKETS - 1/2" DRIVE



PREM-1412MD

14 Piece 1/2" Drive Deep Metric Impact Socket Set
• Sizes: 10 mm, 11 mm, 12 mm, 13 mm, 14 mm, 15 mm, 16 mm, 17 mm, 18 mm, 19 mm, 21 mm, 22 mm, 26 mm, 27 mm



PREM-1312D

13 Piece 1/2" Drive Deep SAE Impact Socket Set • Sizes: 7/16", 1/2", 9/16", 5/8", 11/16", 3/4", 13/16", 7/8", 15/16", 1", 1-1/16", 1-1/8", 1-1/4"



PREM-1511TP

11 Piece 1/2" Drive Extra Thin Wall Protector Impact Sockets • Fractional Sizes: 3/4", 13/16", 7/8", 15/16", 1", 1-1/16"; Metric Sizes: 17 mm, 19 mm, 21 mm, 22 mm, 23 mm



PREM-1503TP

3 Piece 1/2" Drive Extra Thin Wall Protector Set • This set contains one of each of 17 mm, 19 mm and 21 mm impact sockets with protector sleeve

Code	Description	Size
PREM-2021MD	1/2" Drive Metric 6 Point Deep Length Impact Socket	21 mm
PREM-2192DT	1/2" Drive Extra Thin Wall Flip Socket	19 mm / 21 mm
PREM-2392D	1/2" Drive Thin Wall Flip Socket	19 mm / 21 mm
PREM-2349D	1/2" Drive Thin Wall SAE Flip Impact Socket	7/8" / 15/16"



PREM-2021MD PREM-2192DT PREM-2392D PREM-2349D



IMPACT SOCKETS - 3/4" DRIVE

PREM-8032

11 Piece 3/4" Drive Standard and Deep Length Impact Socket Set with Metal Case • Deep: 3/4", 13/16", 7/8", 1", 1-13/16", 33 mm; Thin Wall Deep: 1-1/16", 1-1/8", 1-1/4"; Deep Budd: 1-1/2"; Square: 13/16"



PREM-9152

10 Piece 1" Drive Truck Wheel Impact Socket Set • Standard: 7/8", 15/16", 1", 1-13/16"; Deep: 33 mm; Thin Wall Deep: 1-1/16", 1-1/8", 1-1/4"; Deep Budd: 1-1/2"; Square: 13/16"



PREM-9153

10 Piece 1" Drive Standard and Deep Length Impact Socket Set • Deep: 33 mm, 35 mm, 41 mm; Deep Budd: 1-1/2"; Thin Wall Deep: 1-1/16", 1-1/8", 1-1/4"; Square: 13/16", 17 mm, 21 mm

*Thin and extra thin impact sockets are not covered by any manufacturers warranties.



TORQUE WRENCHES



C3FR250F

C4D600F

NB-120110

C5D600F

NB-120115-1

AME-67720K

Code	Drive	Brand	Description
C3FR250F	1/2"	Precision Instruments	Split-Beam Torque Wrench with Flex Ratchet Head • 40-250 ft-lb • 5 ft-lb increments
C4D600F		Precision Instruments	Split-Beam Torque Wrench with Flex Ratchet Head • 200-600 ft-lb • 10 ft-lb increments
NB-120110	3/4"	Norbar	Industrial 4AR-N Torque Wrench • Dual Scale • 150-600 ft-lb • Accuracy: ±4 • Push-Through Ratchet allows 2 direction torqueing • New handle is more comfortable and guides hand to correct position • Can be split and packed in 2 parts
C5D600F		Precision Instruments	Split-Beam Torque Wrench with Flex Ratchet Head • 200-600 ft-lb • 10 ft-lb increments
NB-120115-1	1"	Norbar	5AR-N Torque Wrench • Dual Scale • 200-750 ft-lb • Back Break action • Robust with an unmistakable torque signal • Split for ease of storage and transportation
AME-67720K		AME	TorqIT Air Pneumatic Torque Gun Kit • Range: 500-2,000 ft/lb • Includes Torque Gun, carrying case & air regulator

CHROME PASSENGER & LIGHT TRUCK WHEEL NUTS

Our selection of Premier Performance Chrome Wheel Nuts are made with high quality chrome-plated steel that ensures simple installation, longevity and robust performance.

Code	Description	Qty
A-LM001-10-50	12 mm x 1.5 Right Thread • Hex 13/16" • 36 mm length	50
A-LM019-10-50	12 mm x 1.5 Right Thread • Hex 3/4" • 35 mm length	50
A-LM030-14-30	14 mm x 1.5 Thread • Hex 21 mm • 54 mm length	30
A-LM030-16-30	14 mm x 2.0 Thread • Hex 21 mm • 54 mm length	30
A-LM041-14-30	14 mm x 1.5 Thread • Hex 22 mm • 46 mm length	30
A-LM045-10-30	12 mm x 1.5 Thread • Hex 19 mm • 43 mm length	30
A-LM859-10-40	12 mm x 1.5 Thread • Hex 21 mm • 36 mm length	40



A-LM019-10-50



A-LM030-14-30



A-LM041-14-30

TRUCK WHEEL STUDS & NUTS



715SI
3/4"-10 Thread x
2-15/16" Lug Stud



333B
M22 x 1.5 Flange
Cap Nut • Hex
33 mm



SN-M22
Skirt Nut® M22 x 1.5 with Hex Cap is
the world's only patented 22 mm Wheel
Fastener for Hub-Piloted Wheels



SCAN QR CODE TO VIEW FULL SECTION

STUD, LUG NUT & HUB CLEANERS



CAB-STK-13AD



AME-37330



AME-37350



CAB-WMK



AME-37500

Code	Application	Description
CAB-STK-13AD		Automotive Stud / Hub Cleaning Kit • Includes 12 mm, 13 mm, 14 mm, 16 mm stud cleaning brushes with 13 mm hub cleaning disc and stud brush cleaning tool with adapter • Also includes Low Speed Air Driver with Forward / Reverse Control
AME-37330		AME Hub Buddy XL Lug/Hub Surface Cleaner • Used with 1/2" impact wrench • Removes rust, corrosion and build-up from wheel stud, drums and tire rim • Includes 1 cleaning disc head
AME-37335	Passenger / LT	Replacement Cleaning Discs for AME-37330 • 6 Pack
AME-37350		AME Hub Bro Impact Wheel Hub Cleaner • Features a large diameter for cleaning wheel mounting surface • Used with 1/2" impact wrench • Diameter 6.3" x 2.56" • Strip-away style abrasive
AME-37355		Replacement Abrasive Pad for AME-37350
CAB-WMK		Counteract Commercial Wheel Cleaning Kit with Low Speed Air Driver • Clean hub piloted commercial applications • Includes preloaded Stud Cleaner, Replacement Brushes, Safety Goggles, 1/2" Drive Adapter and Hex Key
AME-37500	HD Truck	AME Hub Buddy Truck Version Lug/Hub Surface Cleaner • Used with 1/2" impact wrench • Cleaning Disc will remove rust and corrosion leaving mating face clean for install • Includes 1 cleaning disc head
AME-37522		Replacement Cleaning Discs for AME-37500 • 10 Pack

LUG NUT / WHEEL LOCK REMOVERS & WHEEL GUARDS



2300K

12-Piece Passenger and Light Truck Wheel Lug Nut Removers • Use when key not available • Removes damaged lug nuts • Tapered left-hand thread grips tapered or straight threads • Also works on hex nuts • 1/2" drive



78537

Steelman Pro 16-Piece Locking Lug Master Key Set • Designed to remove locking lug nuts on aftermarket wheels • Includes 16 double hex-headed hex and tuner style keys • Made of heat-treated chrome vanadium steel and finished with corrosion resistant black oxide



60102-5903

Wheel Guard • 22 mm Stud Diameter • Standard • 10 Hole • 285 mm Hub Piloted

O-RINGS

Haltec Off-The Road Standard O-Rings for Tubeless Rims • Used to seal tire beads on Grader, Earthmover and Off-The-Road Rims

Code	Description	Code	Description
H-OR-220TG	Haltec O-Ring • 220T OTR • 20 x 1/4"	H-OR-320T	Haltec O-Ring • 320T OTR • 20 x 3/8"
H-OR-224TG	Haltec O-Ring • 224T OTR • 24 x 1/4"	H-OR-325T	Haltec O-Ring • 325T OTR • 25 x 3/8"
H-OR-232T	Haltec O-Ring • 232T OTR • 32 x 1/4"	H-OR-333T	Haltec O-Ring • 333T OTR • 33 x 3/8"
H-OR-25T	Haltec O-Ring • 25T OTR • 25 x 1/4"	H-OR-335T	Haltec O-Ring • 335T OTR • 35 x 3/8"



AIR/HYDRAULIC BOTTLE JACKS & LIFT CYLINDERS



AME-14455



AME-14460



GT-G432020



AME-14461



GT-G432021



AME-13120

Code	Brand	Capacity	Description	Min. Height	Max. Height	Weight
AME-14455	AME	20 t	Jackzilla features an In-Line Regulator • Includes a 10" x 10" Jack Plate	9.7"	18.5"	35 lbs
AME-14460	Titan	20 t	Chrome ram • Aluminum air motor • Heavy duty return springs	9.7"	18.5"	38 lbs
GT-G432020	Winntec	20 t	Equipped with an air regulator • Chrome Ram, Welded Base and Return Springs	10"	18.5"	38 lbs
AME-14461	Titan	20 t	Low Profile • Welded base • Chrome Pump Piston and Ram • Extension Screw	5.8"	10"	21 lbs
GT-G432021	Winntec	20 t	Low Profile • Welded base • Chrome Ram • Aluminum Air Motor • Includes Air Filter and Air Regulator	5.75"	10.31"	24.25 lbs
AME-13120	AME	55 t	Lightweight Aluminum Cylinder for easy handling and placing under vehicles • Includes Shut-Off Valve to allow the pump to be removed while the ram is extended • Aluminum Base for stability during field use • AME-13120 and AME-13121 Stroke: 6" • AME-13140 Stroke: 10"	12.25"	18.25"	29 lbs
AME-13121				11.75"	17.75"	29 lbs
AME-13140				16.25"	26.25"	38 lbs

HYDRAULIC FLOOR JACKS



GT-G420303



AC-DK20Q



AME-14350

Code	Brand	Capacity	Description	Min. Height	Max. Height	Weight
GT-G420303	Winntec	3 t	High quality durable Turbo Floor Jack	5.12"	19.29"	94.7 lbs
AC-DK20Q	AC Hydraulic	2 t	European-made Quick Lift Floor Jack	3.14"	19.5"	68 lbs
AME-14350	AME	4 t	Lightweight Forklift Jack • Specially designed seals	2.25"	16"	69 lbs



SCAN QR CODE TO VIEW FULL SECTION

premacanada.ca | 1-800-268-6311 | sales@premacanada.ca | 37

AIR/HYDRAULIC FLOOR JACKS



GT-3531



GT-4532



GT-G432024



AC-25-2



AC-50-2



AME-14140

Code	Brand	Capacity	Description	Min. Height	Max. Height	Weight
GT-3531	Gaither	35 t	Durable A/H Floor Jack with solid base • Long handle	7.3"	16.7"	93 lbs
GT-4532	Gaither	45/20 t	2-Stage A/H Floor Jack • Built-in Water Separator • Long, one-piece handle	5.9"	16.53"	99 lbs
GT-G432024	Winntec	24 t	Air Service Jack • Equipped with an extension screw and extension pegs • Stroke 5.55"	8.46"	17.36"	92.59 lbs
AC-25-2	AC Hydraulic	25/10 t	2-Stage A/H Jack for Buses and Trucks • Designed for heavy-duty, intensive commercial use • 2 Height Steps 10.82" and 14.96"	7.08"	14.96"	132.27 lbs
AC-50-2	AC Hydraulic	50/25 t	2-Stage A/H Jack for Heavy Buses and Trucks • Designed for heavy-duty, intensive commercial use • 2 Height Steps 13.38" and 17.71"	8.7"	17.71"	176.37 lbs
AME-14140	Titan	22 t	A/H Service Jack with Extension Saddles	8.27"	20.67"	110 lbs

CRIBBING BLOCK SETS, JACK PLATES & STANDS

AME Cribbing Blocks are certified and tested • Multiple shapes and sizes • Interlocking or aggressive non-slip surface • Non-conducting plastic resists most oils and chemicals • Does not splinter like wood • Made from 100% recycled plastic

Code	Description	Includes	Lanyard Colour
AME-15255	10-piece Industrial Cribbing Set	(3) AME-15210 (6) AME-15230 (1) AME-14465	Yellow Blue N/A
AME-15260	12-piece Industrial Cribbing Set	(12) AME-15230	Blue
AME-15662	42-piece Industrial Cribbing Set	(42) AME-15230	Blue



AME-15210



AME-15230



AME-14465

Code	Description	Lanyard Colour
AME-14464	50 Ton Capacity Jack Plate • 12" x 12" x 1" • 5 lbs	Orange
AME-14468LT	100 Ton Capacity Jack Plate • 24" x 24" x 2" • 24 lbs	Black



AME-14464



AME-14468LT

AME-15002

3 Piece Heavy Duty Steel Crib Kit • Includes: 3", 6" and 9" High Stands — Durable, will not bend or warp • Recessed area on cribbing fits 7" Square Plate on 55 Ton Cylinders • Can be stacked with other AME Steel Crib Stands • Will not slide • Use individually or stack together



AME-15002



BRAKE & PARTS CLEANER 2.0 - ACETONE FREE

10% VOC Exotic Brake Cleaner • Acetone free • Quickly dissolves and removes grease, oil, brake fluid, road grime and dirt from brake parts, CV joints, disc pads, drums, and other components • Deep cleaning and fast drying

Code	Description	Size
EMZ45215	Spray Bottle	390 g
EMZ45273	Pail - Threaded for Spigot (Sold separately as EMZ32339)	18.9 L
EMZ45274	Pail with Pull-Up Spout	18.9 L



HAND CLEANERS & DISPENSER



5930443
Rema Tip Top Super Hand
Cleaner • 11 L



PHC-SUPER

Prema Heavy Duty Hand Cleaner • Superior cleaning ability for hard to remove dirt and grime • Gentle to the skin • Suitable for daily use • Does not clog drains • 5 L



PHC-DISP
Prema/Rema
Hand Soap
Dispenser

PIG MATS

PIG Mat lasts 2X longer than ordinary mats for fewer change-outs. It absorbs oils, coolants, solvents and water; just about any mess you need to clean up!

Code	Description	Dimensions
MTY-25100	PIG Mat Lightweight Mat Pad • Box of 100	15" x 20"
MTY-25201	PIG Mat Lightweight Mat Pad • Roll	15" x 50'
MTY-25300	PIG Mat Mediumweight Mat Pad • Box of 100	15" x 20"
MTY-25400	PIG Mat Mediumweight Mat Pad • Roll	30" x 150'



NITRILE GLOVES

BLACK NITRILE GLOVES, 6 mil

Extra strength 6 mil VOLT powder-free black nitrile gloves • Latex-free • 100 gloves per box, 50 pairs per box • Touchscreen compatible

Code	Size
FG-BK1201-SM	Small
FG-BK1202-MD	Medium
FG-BK1203-LG	Large
FG-BK1204-XL	Extra Large
FG-BK1205-2XL	Extra Extra Large



ORANGE NITRILE GLOVES, 8 mil

Extra strength 8 mil GRIP powder-free orange nitrile gloves • Latex-free • 100 gloves per box, 50 pairs per box • Touchscreen compatible

Code	Size
FG-OR7101-SM	Small
FG-OR7102-MD	Medium
FG-OR7103-LG	Large
FG-OR7104-XL	Extra Large
FG-OR7105-2XL	Extra Extra Large



SCAN QR CODE TO VIEW FULL SECTION

TIRE BAGS

Code	Description	Dimensions	Size	Qty per Roll
3-TBLRG-250	High quality Tire Bags • 1 mm Thickness	33" x 6" x 44"	Large	250
3-TBLRG-IMAGE	High quality Tire Bags • 1 mm Thickness • Print your company logo, address or any custom message • 80 rolls minimum • Allow 4-5 weeks for production	33" x 6" x 44"	Large	250
3-TBXLRG-125	Extra large Tire Bags • 1.25 mm Thickness	32" x 15" x 48"	Extra Large	125



3-TBXLRG-125


FLOOR MATS, PLASTIC SEAT & STEERING WHEEL COVERS

Code	Description	Dimensions	Qty per Roll/Box
FM16X22-500	Floor Mat - Regular Waffle Style • 8pt Paperboard	16.5" x 22"	500
FMPB16X22-400	Floor Mat - Waffle Style • 8pt Paperboard with plastic backing	16.5" x 22"	400
3-SCE-500	Slip N' Grip Plastic Seat Covers • Economy clear film • 0.5 mm Thickness • Roll	32" x 13" x 39"	500
3-SCP-250	Slip N' Grip Plastic Seat Covers • Premium clear film • 0.7 mm Thickness • Roll	32" x 13" x 42"	250
3-SCPBX-250	Slip N' Grip Plastic Seat Covers • Premium clear film • 0.7 mm Thickness • Box	32" x 13" x 42"	250
3-SWC-500	Slip N' Grip Clear Plastic Steering Wheel Covers • Double cloth band • Elastic design	24"	500

FM16X22-500



3-SCP-250



3-SCP-250

ROLOC GRINDING DISCS



Provides a fast, efficient method for grinding, cleaning blending, leveling and finishing all types of metal • Twist-lock • Aluminum oxide cloth • 25,000 RPM

SURFACE CONDITIONING DISCS



Shark Industries Quick Change Surface Conditioning Discs for high-performance cleaning and deburring • Removes grind marks, rust and coatings • Each conformable, non-woven disc features a Type R quick-change locking system that is easily attached to the backing pad • Swap out an old disc quickly and get back to work • Use with right-angle and die grinders • 25,000 RPM • Colour coded to reflect grit

Code	Description	Grit	Qty
SRK3230GT-100	2" Roloc disc	36	100
SRK3250GT-100	2" Roloc disc	50	100
SRK3280GT-100	2" Roloc disc	80	100
SRK3330GT-100	3" Roloc disc	36	100
SRK3350GT-100	3" Roloc disc	50	100
SRK3380GT-100	3" Roloc disc	80	100

Code	Description	Grit	Qty
SRK13062	2" Brown	Coarse	25
SRK13003	2" Brown	Coarse	50
SRK13019	3" Brown	Coarse	25
SRK13018	2" Burgundy	Medium	25
SRK13004	2" Burgundy	Medium	50
SRK13027	2" Blue	Fine	25



Counteract® WHEEL PRO

Commercial Stud & Hub Cleaner



EASY SNAP-TECH DESIGN

- Completely new ergonomic tool and brush design
- Easily switch from stud cleaning to hub/wheel cleaning in a matter of seconds
- Two tool bodies available to cover both the automotive and commercial markets
- Full aluminum anodized body

WHEEL PRO XL

Covers over 90% of all commercial truck wheel-end applications



Wheel Pro XL
CAB-WPXL-T22



22mm Stud Brush
CAB-WPXL-SB22



60mm Hub Brush
CAB-WPXL-HB22

WHEEL PRO

Covers a large majority of automotive/light truck and trailer applications



Wheel Pro
CAB-WP-T12



12mm Stud Brush
CAB-WP-SB12



14mm Hub Brush
CAB-WP-SB14



40mm Hub Brush
CAB-WP-HB1640



50mm Hub Brush
CAB-WP-HB1650

Counteract® Socket Pro

Deep impact sockets work in cases of corroded and rounded lug-heads for commercial wheel and fastener applications.

Manufactured with quality chrome molybdenum alloy steel for superior torque and durability.

COMPATIBLE ON AT LEAST 6 DIFFERENT FASTENER TYPES:

6-Point 50% Rounded-Off Star Drive Square Spline 12-Point



Scan the QR
code to see
the beads
in action.



- #1 internal balancer
- Easy throw in bag
- Increase fuel economy
- Longer lasting tire life
- No damage to inner liner
- Save time in the shop
- Can be injected through valve stem





**Serving Canada coast-to-coast for over 70 years.
Over 20,000 items for all your tire and wheel service needs
in the following categories and more:**

Tire Repair Materials

Tire Repair Tools

TPMS

Valves & Accessories

Wheel Balancing Supplies

Air & Cordless Tools

Impact Sockets

Air Lines & Fittings

Air Inflation Tools

Tire Service Chemicals & Lubricants

Tire Changing Tools & Accessories

Tire Service Tools

Wheel Service Tools

Jacks & Accessories

Shop Supplies

Automotive Parts

Automotive Supplies

Equipment

Shop Tools

Retread & Section Repair Tools

Repair Parts