GAITHER BEAD BAZOOKAS

The new BEAD BAZOOKA® utilizes an upgraded version of the trigger-operated rapid air release (RAR) valve technology found in the original BEAD BAZOOKA® models. The extra power it delivers allows it to be smaller and lighter while still allowing the user to seat even the most stubborn tire beads. Half the size twice the power • Serviceable/Replaceable 2" RAR valve • Utilizes ultra-compact design • Anti-corrosion interior tank coating




STEEL ADHESIVE WHEEL WEIGHTS

Lead-free, low profile





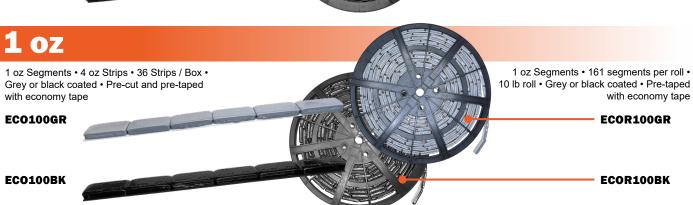

February / March 2024

Prices Subject to Change Without Notice • While Supplies Last • Some Items May Require Minimum Qua

PREM-ONE



TPMS SOLUTIONS

33500S **EZ-SENSOR**



Dual Band Programmable TPMS EZ-Sensor with Snap-In Valve • Combines 314.9, 315 and 433 MHz Applications into a Single SKU



U-Pro Dual Frequency TPMS Sensor • 315 / 433 MHz • Interchangeable Valve with the PREM-207 or 20018





U-Pro Dual Band NFC TPMS Sensor • Smart Phone Programmable • 315 / 433 MHz • Interchangeable Valve with the PREM-207 or 20018 **AUT-1-SENSOR AUTEL MX-SENSOR**



Programmable Universal TPMS Sensor • Combines 315 MHz and 433 MHz Frequencies Into One TPMS Sensor • Interchangeable Stem

17-43041 **SMART SENSOR ONE**



Smart Sensor One Multi-frequency Programmable Universal TPMS Sensor • Rubber Stem • Covers Both 315 MHz and 433 MHz • Interchangeable Stem

PREM-TESLA U-PRO HYBRID BLE



U-Pro Hybrid BLE Tesla Replacement TPMS Sensor with Black Clamp-In Valve • Pre-programmed for Tesla Model 3, S, X & Y





IR-285B-6



AND



IR-285B-6

1" Air Impact Wrench with 6" Extended Anvil • Heavy Duty • 1475 ft-lb Torque • Friction Ring-Thru-hole Retainer • D-handle Inside Trigger

IR-327LS-A

Ingersoll Rand Air Tire Buffer, 7/16" Hex Quick Change, .5HP, 3,000 RPM

SNAP-IN TUBELESS VALVES



Length 1-1/4" • .453 Valve Hole • TR413

A-413-500



Length 1-1/2" • .453 Valve Hole • TR414

A-414-500



A-418-500 Length 2" • .453 Valve Hole • TR418



Length 1-1/4" • .453 Valve Hole • TR600HP











A-600HP



Tire and Wheel Service

Solutions

TIRE REPAIRS, TOOLS AND ACCESSORIES

PREMA CENTER-**OVER-INJURY RADIAL REPAIRS**

Designed for use in the crown, shoulder and sidewall area of radial tires



Code	Size	Quantity	Price
PR-109	2" x 3"	20 Units per Box	
PR-110	2-1/4" x 3-1/4"	20 Units per Box	
PR-112	3" x 4-1/4"	10 Units per Box	
PR-115	3" x 3-1/4"	10 Units per Box	
PR-120	3-3/4" x 5"	10 Units per Box	
		······································	

PREMA REINFORCED INSERTS

Premafill Reinforced Narrow or Standard Vulcanizing Insert • For temporary use in all tires with punctures



Code	Wrap	Size	Quantity	Price
PRI-1	Orange	3-3/4"	50 Units per Box	
PRI-2	Blue	3-3/4"	50 Units per Box	
PRI-3	Blue	5-1/8"	40 Units per Box	
PRI-4	Blue	7-1/2"	25 Units per Box	

JACKS

TIRE SPREADERS



AME-73100

AME Air Operated Tire Spreader with stand • For passenger / RV / light truck tires • Wide platform for stable work surface • Adjustable light



AME-73200

AME Automatic Tire Spreader • Air lift allows operator to repair without lifting • Heavy gauge steel • Lamp included • Air regulator / lubricator



and Wheel Service Solutions

TC630

Impact Driven Truck Tire Spreader • Ideal for mobile service • Designed to spread tire beads quickly • Use 1/2" Impact Gun with 1-1/4" socket to open the tool's fingers





AME-14460

Titan 20 Ton Air / Hydraulic Bottle Jack · Chrome ram and aluminum air motor for long life • Heavy duty return springs Factory tested at 150% overload • Min Height 9.7" • Max Height 18.5" • Weight: 38 lbs



GT-G420303

Winntec 3 Ton Turbo Floor Garage Jack • Built with quality materials and loaded with features • Professional universal ioint release • Handle protector • Min. height 5.12" • Max. height 19.29" • Length 31.30" • Width 15.16" • Gross weight 94.7 lbs

MOUNTING COMPOUND



Murphy's Tire and Tube Mounting Compound can be used in its concentrated form or diluted in water (3-4 parts water, 1 part Murphy's) • Amber colour • Nontoxic • Biodegradable • Moderate rust inhibition • Mild citrus odor • Contains no phosphorus, chlorine, zinc or petroleum • Non-flammable

2005 25 lbs





2023

Murphy's Tire and Tube Mounting Compound • Ready-to-use liquid for easy application • Soap-based • Easy to clean up • Non-toxic • Biodegradable Moderate rust inhibition • Mild citrus odor • Contains no phosphorus, chlorine, zinc or petroleum • Nonflammable • Size: 5 gal

CALCIUM PUMPS & ACCESSORIES



AME-15100 CALCIUM PUMP

AME-15090-010

1" Yamada Calcium Pump with Kit • High quality unit with 40 gallon (152 L) per minute capacity • 1:1 ratio Double Diaphragm Pump • Weight 38 lbs (17.2 kg) • Features: Two 10' Rubber Hoses, Metal Shut-Off Valve, and Ejector Gun

Air Filter / Muffler for the AME-15090 Graco



AME-15090-001

Hose for AME-15090 Graco Calcium Pump • Rubber • 10' x 3/4" x 1" • Male Ends



AME-15095

Metal 4-way valve for calcium pumps • Anodized aluminum — outlasts brass and polymer valves • Buna-N seals outlast rubber seals • Can be used with any existing calcium pump system • Can transfer: calcium chloride, methanol, anti-freeze, rimguard, and water



AIR LIQUID VALVES AND GAUGES



A-618A

Large Bore Air Liquid Valve • TR # TR618A • Rim Hole .625" • Length 1-7/8"



A-618RSI

Large Bore Air Liquid Valve, Snap-In • TR # TR618A • Rim Hole .625" • Length 1-7/8"



A-CH3

Air Liquid Core Housing • TR # TRCH-3



Large Bore Air Liquid Valve • 65° Bend • TR # TR621A • Rim Hole .625" • Length 3"



A-622A

Large Bore Air Liquid Valve • 90° Bend • TR # TR622A

• Rim Hole .625" • Length 4-1/2"



A-623A

Large Bore Air Liquid Valve • 65° Bend • TR # TR623A

• Rim Hole .625" • Length 2-1/4"



A-SP2

Large Bore Tubeless Tire Spud • TR # TRSP2 • Rim



A-936A

Large Bore Air Liquid Valve • Rim Hole .453" • Length 9/16"



A-936B

Large Bore Air Liquid Valve • Rim Hole .625" • Length 9/16"



Rema TR218A Air Liquid Tractor Tube Replacement Valve • Agricultural / OTR Tube Valve Repair Unit • Fast Flow Valve •



7230

Air Liquid Tractor Gauge for Air and Liquid Filled Tires • 4-Sided Nylon Bar • Calibrated

5-45 lbs in 1 lb units • Made in the USA



VH660

Air Liquid Tractor Gauge for Air and Liquid Filled Tires • 4-Sided Nylon Bar — 2 sides calibrated 5-50 lbs in 1 lb units, other sides 35-310 kPa







