

WHEEL WEIGHT TOOLS



50K
Clip-On Wheel Weight Hammer with "Clip Claw" Pliers



75K
Alloy Hammer • Used for the installation of coated clip-on wheel weights • Features a replaceable soft acetate hammer face • Wooden handle with a natural lacquer finish • Cast steel head with an enamel finish • Rear mounted (replaceable) hardened steel "Clip Claw" horn quickly removes old weights



UWT1200HP
Wheel Weight Hammer & Remove Tool for removal and application of wheel weights • Replaceable parts • Removes 99% of ALL wheel weights • Eliminates scratched rims • Made in the USA




STEEL ADHESIVE WHEEL WEIGHTS

Lead-free, low profile

1/4 oz

1/4 oz Segments • 3 oz Strips • 48 Strips / Box • Grey or black coated • Pre-cut and pre-taped with economy tape

EC0025GR

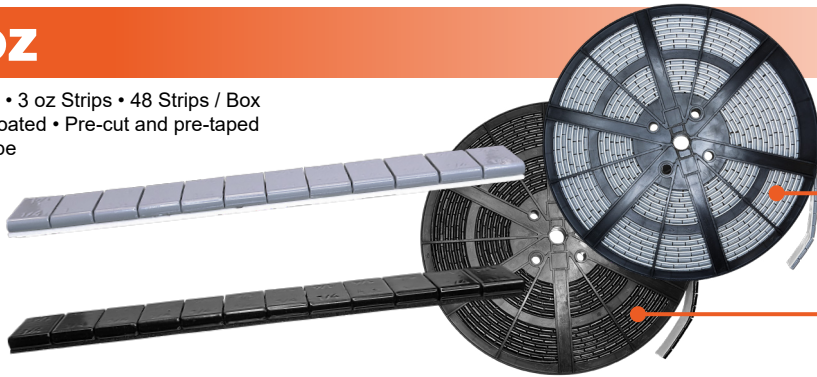

ECOR025GR

EC0025BK


ECOR025BK

1/4 oz Segments • 715 segments per roll • 11 lb roll • Grey or black coated • Pre-taped with economy tape

1/2 oz

1/2 oz Segments • 3 oz Strips • 48 Strips / Box • Grey or black coated • Pre-cut and pre-taped with economy tape

EC0050GR

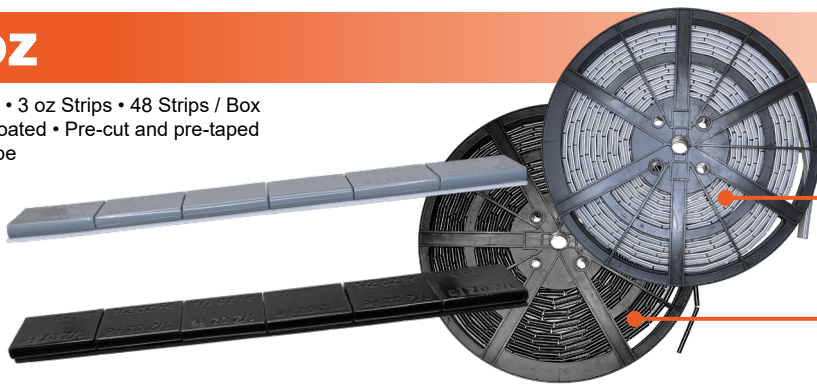

ECOR050GR

EC0050BK


ECOR050BK

1/2 oz Segments • 300 segments per roll • 9 lb roll • Grey or black coated • Pre-taped with economy tape

1 oz

1 oz Segments • 4 oz Strips • 36 Strips / Box • Grey or black coated • Pre-cut and pre-taped with economy tape

EC0100GR

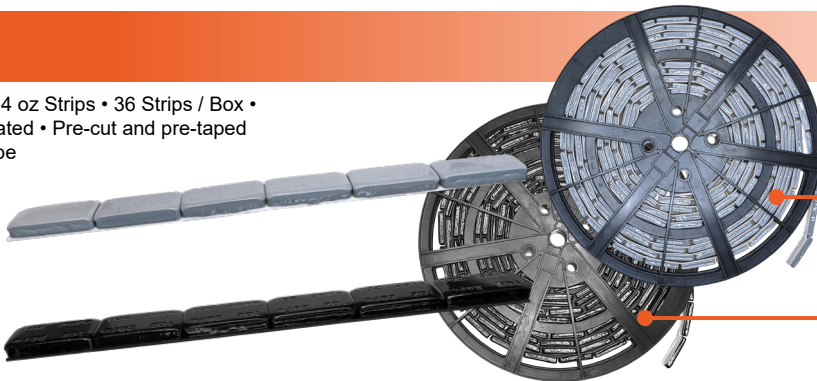

ECOR100GR

EC0100BK

ECOR100BK

1 oz Segments • 161 segments per roll • 10 lb roll • Grey or black coated • Pre-taped with economy tape

PREMA CANADA
FEATURED PRODUCTS



TPMS SOLUTIONS



591134
Sens.it RS+ Dual Frequency TPMS Sensor with Rubber Snap-In Valve

- 99.7% coverage and 100% OE mimic functionality
- Compatible with all leading programming tools and backed by US-based technical support
- Programming Options: Programmable & Cloneable
- Frequency Range: 315 MHz & 433 MHz
- Sensor Max Pressure Rating: 116 psi (800 kPa)



AIR TOOLS

NEW!



AIR-1992-A
1" STRAIGHT IMPACT WRENCH WITH 6" EXTENDED ANVIL

1,800 ft-lb maximum torque and 2,000 ft-lb of loosening torque • 5,000 RPM • Low maintenance pin-less hammer provides ultimate reliability and added hitting power • Features enlarged inner cavity of rotating "D" handle grip • Combined forward/reverse and power management switch • Combined through hole and friction ring socket retainer • 27.8 lbs



AIR-1431

AIR-1431-2

AIR-1431
1/2" IMPACT WRENCH WITH STANDARD ANVIL

Provides 800 ft-lb maximum torque and 1,000 ft-lb of loosening torque • 9,000 RPM • Hard hitting twin hammer mechanism • Cross bolt forward/reverse and power management control • 5.7 lbs

AIR-1431-2
1/2" IMPACT WRENCH WITH 2" EXTENDED ANVIL

Provides 800 ft-lb maximum torque and 1,000 ft-lb of loosening torque • 9,000 RPM • Hard hitting twin hammer mechanism • Includes Grey Pneumatic® Thin Wall Flip Socket (19 mm / 21 mm) • 6 lbs

ORANGE NITRILE GLOVES, 8 mil



Extra strength 8 mil GRIP powder-free orange nitrile gloves provide maximum protection, performance, and durability.

Latex-free, these gloves offer great chemical resistance in addition to superior puncture and abrasion resistance • 100 gloves per box, 50 pairs per box • Touchscreen compatible

Code	Size	Price
FG-OR7101-SM	Small	
FG-OR7102-MD	Medium	
FG-OR7103-LG	Large	
FG-OR7104-XL	Extra Large	
FG-OR7105-2XL	Extra Extra Large	

PLASTIC SEAT COVERS



• Clear film

Code	Size	Thickness	Qty	Price
3-SCE-500	32" x 13" + 39"	0.5 mm	500 / roll	
3-SCP-250	32" x 13" + 42"	0.7 mm	250 / roll	
3-SCPBX-250	32" x 13" + 42"	0.7 mm	250 / box	



Find your local distributor at www.premacanada.ca
1-800-268-6311



Find your local distributor at www.premacanada.ca
1-800-268-6311



PREMA ORANGE TIRE REPAIRS

PREMA ORANGE
CENTER-OVER-INJURY
RADIAL REPAIRS

Repairs are designed for use in the crown, shoulder and sidewall area of radial tires. Install using Prema Ultra Fast Dry Vulcanizing Cement.



Code	Size	Quantity	Price
PRO-110	72 mm x 51 mm	20 Units per Box	
PRO-112	87 mm x 72 mm	25 Units per Box	
PRO-114	104 mm x 67 mm	10 Units per Box	
PRO-120	122 mm x 75 mm	10 Units per Box	
PRO-125	125 mm x 115 mm	10 Units per Box	
PRO-135	203 mm x 148 mm	15 Units per Box	
PRO-140	192 mm x 103 mm	15 Units per Box	
PRO-142	260 mm x 133 mm	15 Units per Box	
PRO-144	328 mm x 133 mm	10 Units per Box	

PREMA ORANGE
UNIVERSAL ROUND
TIRE REPAIRS

Designed for repairing nailhole injuries in tubeless and tube type bias & radial tires. Install with Prema Ultra Fast Dry Vulcanizing Cement.



Code	Diameter	Quantity	Price
PURO-30	30 mm	120 Units per Box	
PURO-50	50 mm	80 Units per Box	
PURO-70	70 mm	32 Units per Box	

PREMA ORANGE
UNIVERSAL SQUARE
TIRE REPAIRS



Code	Size	Quantity	Price
PUSO-45	43 mm x 43 mm	80 Units per Box	
PUSO-55	55 mm x 55 mm	80 Units per Box	




CUT-OFF WHEELS

Code	Description	RPM	Grit	Qty	Price
SRK25SL-10	3" x 1/16" x 3/8" • Zirconia	25,000	36	10	
SRK12700	3" x 1/32" x 3/8" • Aluminum Oxide • Metal Cutting Only	25,000	54	10	
SRK12701	3" x 1/32" x 3/8" • Aluminum Oxide • Metal Cutting Only	25,000	54	50	
SRK12704	3" x 1/16" x 3/8" • Aluminum Oxide • Metal Cutting Only	25,000	54	10	
SRK12705	3" x 1/16" x 3/8" • Aluminum Oxide • Metal Cutting Only	25,000	54	50	

RUBBERHOG FLARED CONTOUR WHEELS

Precision Contoured Wheels deliver efficient texturing results without gouging rubber surfaces.

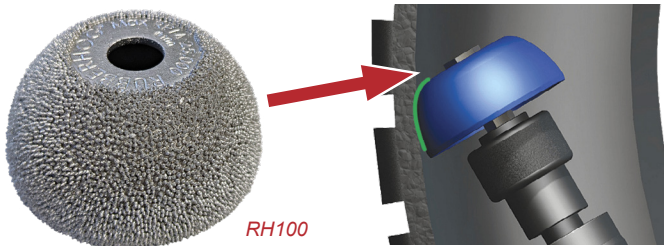

Code	Dia.	Width	Bore	SSG	Grit	Qty	Price
RH100	1-3/4"	3/4"	3/8"	170	60	1	
RH107	2-1/2"	1-1/16"	3/8"	170	60	1	
RH109	2-1/2"	1-1/16"	3/8"	230	36	1	
RH111	2-1/2"	1-1/16"	3/8"	390	16	1	
RH114	3"	1-1/4"	3/8"	230	36	1	
RH116	3"	1-1/4"	3/8"	390	16	1	



RH107



RH109

PRICING MAY VARY BY REGION AND IS SUBJECT TO CHANGE WITHOUT NOTICE • WHILE SUPPLIES LAST • SOME ITEMS MAY REQUIRE MINIMUM QUANTITIES

CS-FLYER0203 — NP

ALCOA AND BRASS TRUCK VALVES

Code	TR #	Rim Hole (in)	Length (in)	Quantity	Price
A-545D-10	545D	.382 / .394	3.5 / 2.6	10	
A-555D-10	555D	.381	.98 / 2.6	10	
A-572-100	572	.625	3.75	100	
A-573-100	573	.625	4.38	100	
A-574-10	574	.625	5	10	



TIRE SWABS



2-964 14-1/2" Cotton Tire Swab	2-965 11-1/2" Cotton Tire Swab
--	--

EXOTIC BRAKE & PARTS CLEANER

NEW!



Patent-Pending formula quickly dissolves and removes grease, oil, brake fluid, road grime and dirt from brake parts, CV joints, disc pads, drums, and other components • Deep cleaning and fast drying • Cleans more effectively than the standard 10% VOC formulation

Code	Size	Details	Price
EMZ45214	390 g	Spray Bottle	
EMZ45270	18.9 L	Pail with Pull-Up Spout	
EMZ45271	18.9 L	Pail - Threaded for Spigot (Sold separately as EMZ32339)	

TIRE MOUNTING LUBRICANTS



2180X
Rema Concentrated Tire and Tube Mounting Compound for Mounting Tubeless Tires or Natural and Synthetic Tubes • 25 lbs



2280
Rema Heavy Duty Concentrated Tire and Tube Mounting Compound for Mounting Tubeless Tires or Natural and Synthetic Tubes • 25 lbs



2490
Rema Super Heavy Duty OTR Tire Mounting / Packing Compound • Contains rust inhibitors • Will not separate or liquefy • Extra thick for superior bead packing on OTR tires • 25 lbs



PMS-400
Prema Mounting Spray • 400 ml



Rema Super Slippery Bead Butter • Blue • Concentrated Mounting Liquid • Non-Toxic • No petroleum products • Can be applied by brush or spray bottle

Code	Size	Price
2053B	1 gal	
2054B	5 gal	