

## WHEEL WEIGHT TOOLS



**50K**  
Clip-On Wheel Weight Hammer with "Clip Claw" Pliers



**75K**  
Alloy Hammer • Used for the installation of coated clip-on wheel weights • Features a replaceable soft acetate hammer face • Rear mounted (replaceable) hardened steel "Clip Claw" horn quickly removes old weights



**UWT1200HP**  
Wheel Weight Hammer & Remover Tool for removal and application of wheel weights • Replaceable parts • Removes 99% of ALL wheel weights • Eliminates scratched rims



**486-71511**  
Heavy Duty Adhesive Wheel Weight Remover • Made of high impact plastic



**2-RCT**  
Adhesive Wheel Weight Removal Tool • Chisel shaped end • High impact plastic

## STEEL ADHESIVE WHEEL WEIGHTS

## 1/4 oz

1/4 oz Segments • 2.5 oz Strips • 65 Strips / Box • Grey or black coated • Pre-cut and pre-taped

**SADHS25C**

1/4 oz Segments • 704 segments per roll • 11 lb roll • Grey or black coated • Pre-taped

**SADHR25C****SADHS25BC**

## 1/2 oz

1/2 oz Segments • 4 oz Strips • 40 Strips / Box • Grey or black coated • Pre-cut and pre-taped

**SADHS50C**

1/2 oz Segments • 300 segments per roll • 9 lb roll • Grey or black coated • Pre-taped

**SADHR50C****SADHS50BC****SADHR50BC**

## 1 oz

1 oz Segments • 4 oz Strips • 18 Strips / Box • Grey or black coated • Pre-cut and pre-taped

**SADHS100C**

## PREMA TIRE REPAIRS

## PREMA COMBI REPAIRS

Prema Combi Repair  
Units for crown injuries  
• Use when the angle of the injury is less than 25° • Prepare the injury using the appropriate Prema Carbide Cutter — PCC-2 For 1/4" or PCC-3 for 5/16"

## PREMA COMBI 2

For 1/4" Injuries



Code	Quantity	Price
PC-2	15 Units per Box	
PC-2J	40 Units per Box	

## PREMA COMBI 3

For 5/16" Injuries




Code	Quantity	Price
PC-3	10 Units per Box	
PC-3J	20 Units per Box	

PRICING MAY VARY BY REGION AND IS SUBJECT TO CHANGE WITHOUT NOTICE • WHILE SUPPLIES LAST • SOME ITEMS MAY REQUIRE MINIMUM QUANTITIES



## TIRE REPAIR CHEMICALS

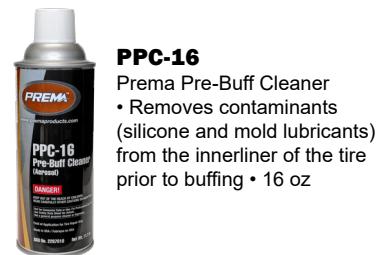

## PPC-16

Prema Pre-Buff Cleaner  
• Removes contaminants (silicone and mold lubricants) from the innerliner of the tire prior to buffing • 16 oz



## PFC-8

Prema Ultra Fast Dry Vulcanizing Cement • Brush Top Can • 8 oz



## PLOS-16

Prema Innerliner Overbuff Sealant • Designed to restore air retention qualities to the buffed innerliner around the repair after installations • 16 oz



## PBS-32

Prema Bead Sealer provides a seal between the bead area of the tire and rim • Extremely thick / Will not drip • Flammable • 32 oz



## 777

Premier Performance Bead Sealer is designed to prevent stubborn bead seepage once applied to rim, after it is remounted • Flammable • 32 oz

## UNIVERSAL MOUNTING PASTE



## 75



## 75N LOW PROFILE BUCKET

Rema Universal Mounting Paste • Provides excellent lubricity for mounting and demounting tires with minimal rim slip • 7.7 lbs / 3.5 kg

## LUBRICANTS

## REMA CONCENTRATED LIQUID TIRE LUBRICANT

81511  
1 Gallon81515  
5 Gallons

## TIRE BRUSHES &amp; SWABS



## TI1506

Angled Lubricant Application Brush • Wooden Handle Length: 7-3/4" • Brush Length: 1-3/4" • Use for application of tire paste • Ergonomically shaped for ease of use • Lightweight at 0.23 lbs



## 2-964

14-1/2" Cotton Tire Swab

## 2-965

11-1/2" Cotton Tire Swab

## TIRE CHANGER ACCESSORIES



## TC14120

Hunter Mount / Demount Duckhead



## TC183061

Coats Mount / Demount Duckhead



## TC184432

Coats Mount / Demount Duckhead



## TC20024335

Hofmann/John Bean Duckhead Refill



## TC450310

Coats/Hofmann/Corgi Duckhead Refill



## TCR343

Hunter Mount / Demount Duckhead

## SCREW-ON VALVE CAPS

33-0709  
ALLIGATOR V2B METAL DOUBLE  
SEALING SCREW-ON VALVE CAPS

Doesn't need to be removed to check air pressure or add air — gauging and inflating is done directly through the valve cap • Has two built-in heat-resistant grommets that prevent loss of air pressure even when the valve core is damaged or dirty • Air pressure check time is reduced by up to 65% • Fits all standard valves • Water and dirt repellent design • Heavy duty all-metal housing